




Wiha L-keys.

Wiha makes it possible: Perfect technic for professional work.

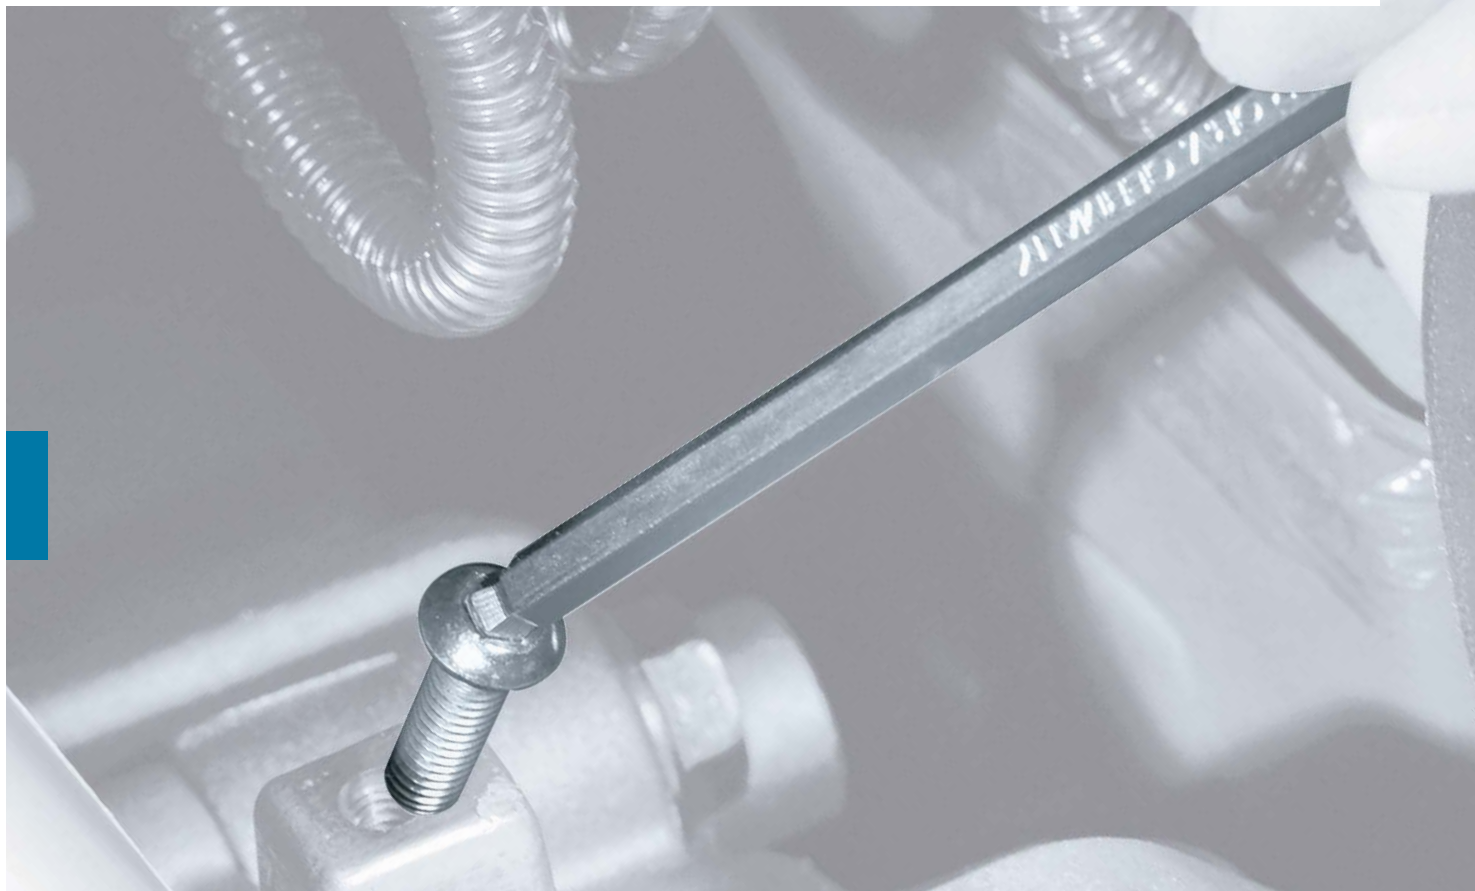

Drive

	Slotted	Phillips PH	Pozidriv PZ	TORX*	TORX* Tamper Resistant	TORX PLUS*	Hex (mm, Inch)	Nut Driver (mm, Inch)	Square nut	Hex with pivot	Multi-tooth
L-keys				133-141			117-131			129	140
ErgoStar holder				133, 137							
ProStar holder				134, 138-139			119-125, 130-131				
Compact holder							123, 125-128				
Classic holder					141	135, 141	121, 123-131				
PocketStar holder	144, 146	144, 146		144-146	145		143-144, 146				
ComfortGrip T-handle				149			148-149				
Classic T-handle				154		154	151-153	152-153	152		
Flag handle				157		157					
Key handle				156		156	156				
Offset screwdriver	157	157	157								





L-key range

Wiha product range overview / holder overview

All Wiha L-key holders at a glance 111 – 113



Wiha product advantages (specialised solutions)

All Wiha product advantages at a glance 114 – 1115

Wiha ErgoStar

He's fastening on to something good 116 – 117

- Ballend hex keys. Metric sizes 120
- Ballend hex keys with MagicRing. Imperial sizes 133
- TORX® MagicSpring® 137
- TORX® ball 137



Wiha L-keys

- Hex keys with MagicRing. Metric sizes 118 – 119
- Ballend hex keys, colour coded. Metric sizes 121
- Ballend hex key. Metric sizes 122 – 124
- Hex keys. Metric sizes 125 – 129
- Ballend hex keys with MagicRing. Imperial sizes 120
- Ballend hex keys. Imperial sizes 130
- Hex keys. Imperial sizes 131
- TORX® MagicSpring® 133 – 134
- TORX® ball 136 – 138
- TORX® 139 – 140
- TORX® Tamper Resistant 141
- TORX PLUS® 141



Wiha PocketStar / Mini PocketStar

Press one button for the correct key 142 / 146

- Ballend hex keys with MagicRing. Metric sizes 143
- Hex keys. Metric sizes 143
- TORX® 144
- TORX® Tamper Resistant 145
- Mixed 144 / 146



Wiha ComfortGrip / Classic T-handle

- Hex keys with MagicRing. Metric sizes 148 / 151
- Ballend hex keys. Metric sizes 148 / 151
- Hex keys. Metric sizes 148 / 152 – 153
- Hex keys. Imperial sizes 153
- TORX® MagicSpring 154
- TORX PLUS® 154
- TORX® 149 / 154



Wiha flag and key handle

- Hex keys. Metric sizes 156
- TORX® 156 – 157
- TORX PLUS® 156 – 157



Wiha Offset screwdriver







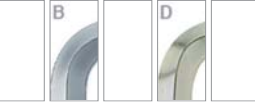
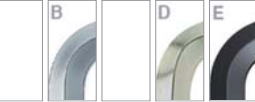


















- Slotted 157
- Phillips 157
- Pozidriv 157





Wiha product range overview / holder overview

All Wiha L-key holders at a glance

Holders	ErgoStar holder	ProStar holder	Compact holder	Classic holder
				
Holder type	Two-row holder	Two-row holder	Two-row holder	Single-row holder
Description	Wiha ErgoStar: this holder stands for comfortable and fast handling. Mechanical operation in form of rotating enables simple and rapid access to each key without being hindered by the other keys.	Wiha ProStar: this holder stands for simple operation. A sliding function enables removing each individual key without accessing the other keys.	Wiha Compact: this holder stands for a combination of space-saving storage and ideal key fixing	Wiha Classic: this holder stands for quick operation. Short removal distances of the keys achieve time-saving operation.
Features	<ul style="list-style-type: none"> • Simultaneous operation of all keys • Easy and quick key removal • Solid stopping point for fixing L-keys in the holder • Innovative clamping ensures L-keys are held firmly in both closed and open state • Compact design takes up little space on the bench or in the toolbox • Wall bracket for practical storage of the ErgoStar • Colour guidance system for output recognition 	<ul style="list-style-type: none"> • Sliding function for one-handed opening of the holder • Easy and quick removal • Compact design takes up little space on the bench or in the toolbox • Hanging possible using hanging bracket • Colour guidance system for output recognition 	<ul style="list-style-type: none"> • Innovative clamping ensures L-keys are held firmly in the holder • Very compact holder construction saves room on workbenches and in toolboxes • Colour guidance system for output recognition 	<ul style="list-style-type: none"> • Easy and very quick key removal • Innovative clamping ensures L-keys are held firmly in the holder • Solid stopping point for fixing L-keys in the holder • Very flat holder construction saves room on workbenches and in toolboxes • Hanging possible using hanging bracket • Colour guidance system for output recognition
Surfaces	ErgoStar holder	ProStar holder	Compact holder	Classic holder
<p>A = brilliant chrome-plated B = matt chrome-plated C = stainless steel D = nickel-plated E = manganese phosphate</p>				
Profile on page	ErgoStar holder	ProStar holder	Compact holder	Classic holder
Hexagon metric 	 117	 119; 121-122 124-125	 123; 125-128	 121; 123-129
Hexagon inch 	 120	 120; 130-131		 130-131
TORX® 	 133; 137	 134; 138-139		 134; 138-141
TORX PLUS® 				 135; 141
TORX® TR 				 141
Hex with pivot 				





Roll-up bag	Box	Key ring	Workbench stand
-------------	-----	----------	-----------------



Roll-up bag	Box	Key ring	Workbench stand
<p>Bag for variable equipping.</p> <ul style="list-style-type: none"> • Variable equipping 	<p>A practical sliding box for the Wiha L-keys is available to protect against the impact of dirt.</p> <ul style="list-style-type: none"> • Protection against the impact of dirt • Hanging possible using hanging bracket • Colour guidance system for output recognition 	<ul style="list-style-type: none"> • Hanging possible using hanging bracket 	<p>The perfect solution for daily access at the workbench.</p> <ul style="list-style-type: none"> • Hanging possible using hanging bracket on the back

Roll-up bag	Box	Key ring	Workbench stand
-------------	-----	----------	-----------------



Roll-up bag	Box	Key ring	Workbench stand
	132; 126; 128	128	128
129			





Wiha product advantages (specialised solutions)

All Wiha product advantages at a glance

Holders	Logo	Application images	Description																	
Ball end			The Wiha ball end stands for mobility, thus enabling fastening of allen screws up to 30° per side.																	
TORX® ball end			The Wiha ball end stands for mobility, thus enabling fastening of TORX® screws up to 25° per side.																	
MagicRing®			Wiha L-keys with Magic-Ring® hold allen screws firmly in any position thanks to a high-tensile spring steel ring.																	
MagicSpring®			Wiha L-keys with Magic-Ring® hold TORX® and TORX PLUS® screws firmly in any position thanks to a high-tensile spring steel ring.																	
Stubby			The new L-key from Wiha, especially for hard-to-reach screws and confined spaces.																	
Colour coding	<table border="1"> <thead> <tr> <th> Red</th> <th> Yellow</th> <th> Green</th> <th> Light green</th> </tr> </thead> <tbody> <tr> <td>Hexagon metric</td> <td>Hexagon inch</td> <td>TORX®</td> <td>TORX PLUS®</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>			Red	Yellow	Green	Light green	Hexagon metric	Hexagon inch	TORX®	TORX PLUS®									The Wiha colour guidance system identifies the output category. There is a distinction among the categories Hexagon metric, Hexagon inch, TORX® and TORX PLUS®.
Red	Yellow	Green	Light green																	
Hexagon metric	Hexagon inch	TORX®	TORX PLUS®																	



Advantages

- Fastenings at angles up to 30° per side
 - Quick feeding of the key into the screw thanks to feeding from various angles
 - The key does not slip out of the screw, which reduces the risk of accidents
 - No deformation of the screw head thanks to precision fitting of the ball end
- Fastenings at angles up to 25° per side
 - Higher torque transmission due to maximum core diameter
 - Elongated profile positioning for further use of the L-key
- Thanks to the combination of MagicRing® with the Wiha ball end, inserting and removing screws is possible, even in hard-to-reach locations
 - Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - Can be used for all standard screws
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
 - Fastenings at angles up to 25° per side
- Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - TORX® and TORX PLUS® screws manufactured according to Camcar Textron specifications
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
- Reduction of the short L-key arm, especially for hard-to-reach screws and confined spaces
 - Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key
 - Improved access through a reduction of the L-key head height of up to 15%
 - Ball end geometry enables fastening at an angle of up to 25°
- Handles and holders in the same colour depending on the output size
 - This provides an overview of the tool assortment






Wiha ErgoStar.


He's fastening on to something good.



red dot design award
winner 2010

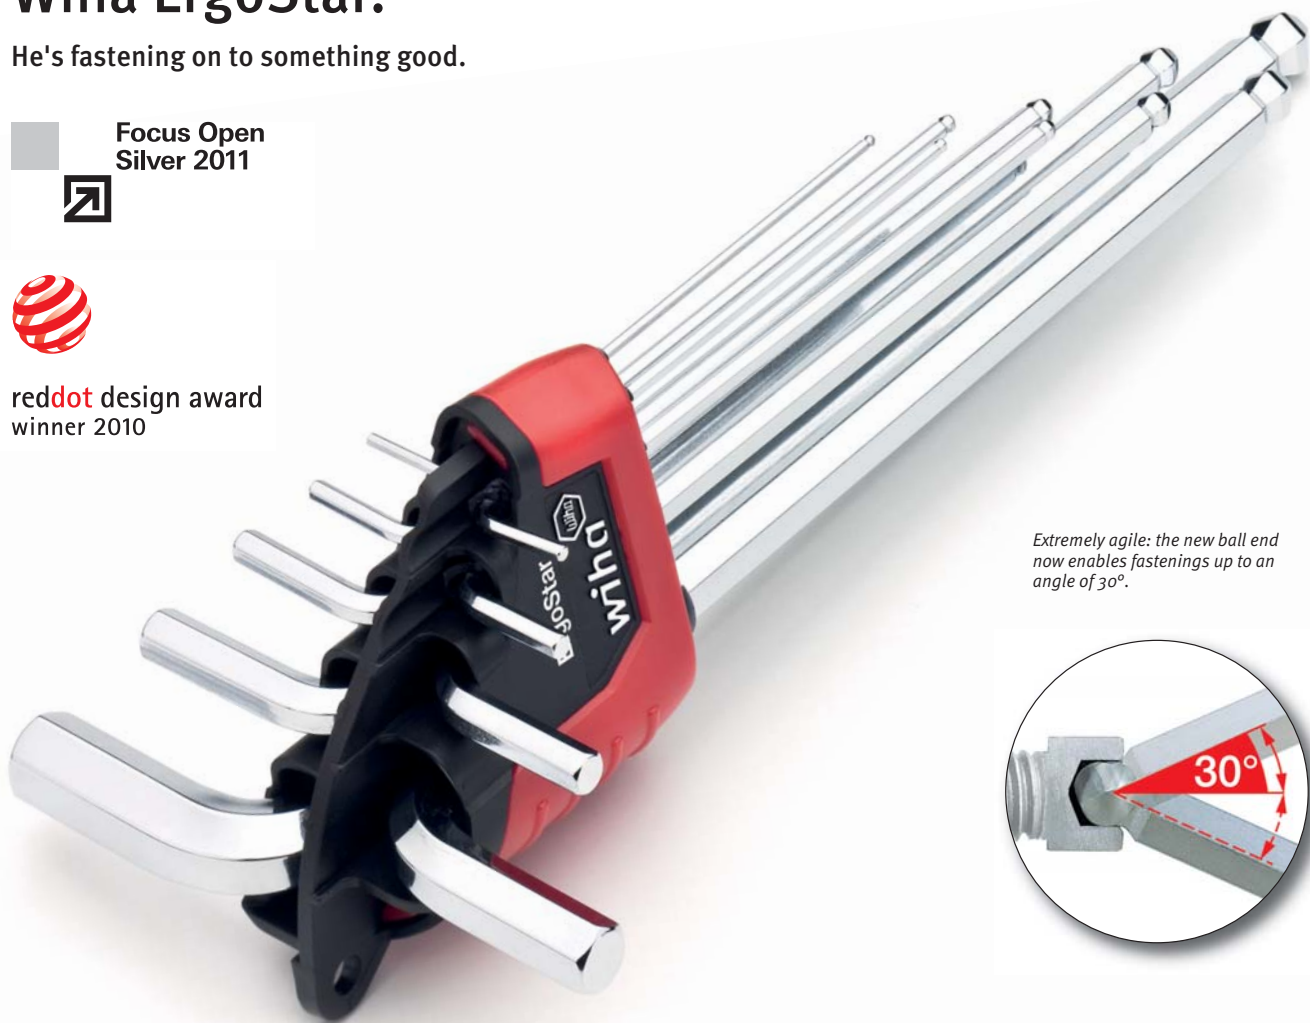

Extremely agile: the new ball end now enables fastenings up to an angle of 30°.



The trick with the new Wiha ErgoStar is as simple as it is effective: rotating a single L-key in the holder means that all other keys rotate to the side at the same angle! That means: there's no more complicated disentangling of adjacent keys any more. All L-keys are ready for removal with a single turn, quicker, more simply and more clearly than ever before.

But easy removal is not the only advantage. The set of Wiha premium L-keys from the series 369S is also included. With the new ball end design, screws can be effortlessly fastened even at an angle up to 30°. Through-hardened, chrome vanadium steel and high quality brilliant chroming are further convincing reasons that make the L-keys essential accessories for everyday work.



The right idea:
a flowing movement means
all L-keys are ready for removal.

Wiha ErgoStar.

- **Innovative key extraction:** One turn and all L-keys are rapidly and conveniently ready for removal
- Quick replacement of keys in the holder thanks to solid stopping point
- Guaranteed firm fixing of keys over the complete service life
- Up to 25% more corrosion resistance thanks to high quality brilliant chroming
- Metric scale (SW 10) in range 20 – 150 mm




For Allen screws (metric).



369S Ball end hex L-key, long.
 Blade: Chrome vanadium steel, through-hardened, brilliant chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: The ball end enables fastening and unfastening at an angle of up to 30°.

Order-No.	●	↔	↖	↗
34755	1.5	91	15	10
34756	2	101	18	10
34757	2.5	113	20	10
34758	3	128	23	10
34759	4	142	29	10
34760	5	163	33	10
34761	6	184	38	10
34762	8	206	44	10
34763	10	231	50	5

For Allen screws (metric).

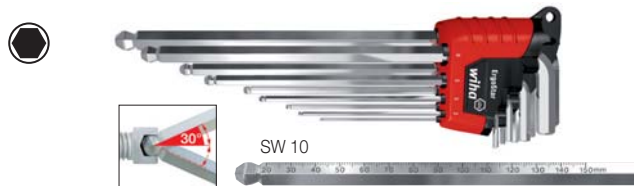

369 H9S Hexagon ball end L-key set in ErgoStar holder.
 Brilliant chrome-plated, 9 pcs.
 Blade: Chrome vanadium steel, through-hardened, brilliant chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Mechanical operation of the space-saving ErgoStar holder makes simplest removal of each individual L-key possible without movement of the others.
 The ball end enables fastening and unfastening at an angle of up to 30°. Metric scale permanently lasered on to the (SW 10) key for depth, inner, outer and step measurements between 20 to 150 mm.
 Only available as part of a set.

Order-No.	●	↔	↖	↗	↘	↙	↕
34753	369 H9S						5
●	369S	1.5	2	2.5	3	4	5
		5	6	8	10		

SB 369 H9S Hexagon ball end L-key set in ErgoStar holder.
 Brilliant chrome-plated, 9 pcs.
 Blister packed.

Order-No.	●	↔	↖	↗	↘	↙	↕
34754	SB 369 H9S						5
●	369S	1.5	2	2.5	3	4	5
		5	6	8	10		



Wall holder for practical storage of the Wiha ErgoStar: all keys always ready to hand. Available together with the Wiha ErgoStar in all display and blister pack versions.



369 HVH1S Display hexagon ball end L-key sets in ErgoStar holder.
 Brilliant chrome-plated, 9 pcs.
 Card display with 5 pieces.

Order-No.	Content	●	↔	↖	↗	↘	↙	↕
34764	5 x 369 H9S	1.5 - 10						1



Wiha MagicRing® hexagon L-key.

Securely holds hexagon bolts in place in any position.

MagicRing®
holds all standard screws!

- DIN 6912
- DIN 7984
- DIN EN ISO 4762
- DIN EN ISO 10642
- DIN EN ISO 4026
- DIN EN ISO 4027
- DIN EN ISO 4028
- DIN EN ISO 4029
- DIN EN ISO 7380



Wiha hex keys with MagicRing® guarantee the perfect location of hex screws in every position.

Due to a high-quality retaining ring in the key head, the insertion of a screw in straight, inclined or very deep pocket holes is no problem. The new ball geometry with MagicRing® now offers even more advantages:

- Greater retention force for screws. For example, size 6 holds screws up to 1000 mm in length.
- Enlarged maximum torque of up to 10% due to the new ball geometry.
- Can now be used with all standard screws.

A further advantage is that the Wiha MagicRing® can even be used to



hold non-magnetisable screws made of stainless steel, titanium and aluminium.

Wiha MagicRing® metric is only available as long design from size 3. With the inch dimensions, MagicRing® is available from 1/8". All series are made from highquality chrome-vanadium steel.

Thanks to the Wiha MagicRing®, inserting and removing screws is safe and easy, even in areas that are difficult to access.



The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.



Wiha MagicRing®
hexagon L-key.

- Suitable for removing sunk-head standard screws and for inserting and working screws in horizontal, inclined or deep pocket holes
- Holds screws made of steel and non-magnetisable materials such as stainless steel, titanium and aluminium
- Ideal for applications where there is insufficient space for a simple hex key
- No troublesome searching for dropped screws



For Allen screws (metric).



369R Ball end hex L-key, long. With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
 Extra: MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position. The ball end enables the user to work at angles up to 25°.

Order-No.	●	┌	└	┐
20549	3	128	23	10
20550	4	142	29	10
20570	5	163	33	10
20551	6	184	38	10
20552	8	206	44	10
20553	10	231	50	5



369R S9 Ball end hex L-key set in ProStar. With MagicRing®, chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others. MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position. The ball end enables the user to work at angles up to 25°.

Order-No.	●	┌	└	┐
20709	369R S9			5
●	369	1.5	2	2.5
●	369R	3	4	5
		8	10	6

SB 369R S9 Ball end hex L-key set in ProStar. With MagicRing®, chrome-plated, 9 pcs. Blister packed.

Order-No.	┌	└
20712	SB 369R S9	5

Displays.



369R SVH1 Display ball end hex L-key sets. With MagicRing®, chrome-plated, in ProStar holder, 9 pcs. Carton display with 10 pieces.

Order-No.	Content	●	┌
23265	10 x 369R S9	1.5 - 10	1



NEW 369R SVH2 Display ball end hex L-key sets. With MagicRing®, chrome-plated, in ProStar holder, 9 pcs. Card display with 4 pieces + test card.


Order-No.	Content	●	┌
36130	4 x 369R S9	1.5 - 10	1



Wiha MagicRing® hexagon L-key.

Securely holds hexagon bolts in place in any position.

For Allen screws (inch).

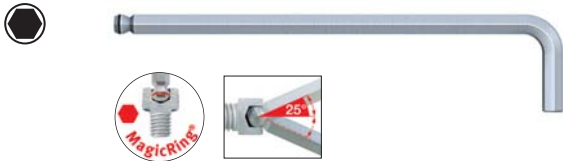

369R Zoll Ball end hex L-key, long.
With MagicRing®, Inch sizes.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ASME B18.3.
Application: Insert hex inch screws into and remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws tight at various angles (available from 1/8"). The ball end enables the user to work at angles up to 25°.

Order-No.	●	↔	↕	mm	↔
29471	0.05	72	13	1.27	10
29472	1/16	80	15	1.59	10
29474	5/64	88	18	1.98	10
29473	3/32	101	20	2.38	10
29475	7/64	111	21	2.78	10
24302	1/8	121	23	3.17	MagicRing®
24304	9/64	136	27	3.57	MagicRing®
24303	5/32	148	29	3.96	MagicRing®
24305	3/16	163	33	4.76	MagicRing®
24306	7/32	176	36	5.55	MagicRing®
24307	1/4	191	38	6.35	MagicRing®
24308	5/16	210	43	7.93	MagicRing®
24341	3/8	232	50	9.52	MagicRing®

For Allen screws (inch).



NEW

369R HZ13 Hexagon ball end L-key set in ErgoStar holder.
From size 1/8" with MagicRing, chrome-plated, 13 pc. inch design.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ASME B18.3.
Application: Insert hex inch screws into and remove from boreholes, especially in difficult to access areas.
Extra: Mechanical operation of the space-saving ErgoStar holder makes simplest removal of each individual L-key possible without movement of the others. MagicRing® made from spring steel holds all standard screws tight at various angles (available from 1/8"). The ball end enables the user to work at angles up to 25°.

Order-No.	↔					
36521	369R HZ13	5				
●	369 Zoll C	0.05	1/16	5/64	3/32	7/64
●	369R Zoll	1/8	9/64	5/32	3/16	7/32
		1/4	5/16	3/8		

NEW

SB 369R HZ13 Hexagon ball end L-key set in ErgoStar holder.
From size 1/8" with MagicRing, chrome-plated, 13 pc. inch design. In blister pack.

Order-No.	↔	
36522	SB 369R HZ13	5



369R SZ13 Ball end hex L-key set in ProStar.
With MagicRing®, chrome-plated, 13 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ASME B18.3.
Application: Insert hex inch screws into and remove from boreholes, especially in difficult to access areas.
Extra: Space saving ProStar allows the easy removal of each key without moving any others. MagicRing® made from spring steel holds all standard screws tight at various angles (available from 1/8"). The ball end enables the user to work at angles up to 25°.

Order-No.	↔					
24190	369R SZ13	5				
●	369 Zoll C	0.05	1/16	5/64	3/32	7/64
●	369R Zoll	1/8	9/64	5/32	3/16	7/32
		1/4	5/16	3/8		

SB 369R SZ13 Ball end hex L-key set in ProStar.
With MagicRing®, chrome-plated, 13 pcs. Inch sizes. Blister packed.

Order-No.	↔	
24850	SB 369R SZ13	5



Wiha Info



Wiha ErgoStar
The right idea:
a flowing movement means all L-keys are ready for removal.



Wiha hexagon L-key (metric).

For Allen screws (metric).



NEW

369T

Ball end hex L-key, long.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Specially for hard-to-reach screws and confined spaces.
 Extra: Increase in the hand working space of over 30% and thus a reduction of risk of injury to the knuckles and fingertips thanks to 95° bend of the L-key. Improved access through a reduction of the L-key head height of up to 15%. The ball end enables the user to work at angles up to 25°.

Order-No.	●	☰	☷	☰
35482	1.5	91	5.5	10
35483	2	101	9	10
35484	2.5	113	9.5	10
35485	3	128	11	10
35486	4	142	13	10
35487	5	163	15	10
35488	6	184	18	10
35489	8	206	22	10
35490	10	231	28	5

For Allen screws (metric).



369F

Ball end hex L-key, long.

Blade: Chrome vanadium steel, through-hardened, colour-coded.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: The ball end enables the user to work at angles up to 25°. Colour coding for immediate identification of L-keys.

Order-No.	●	☰	☷	☰	☰
34269	1.5	91	15	black	10
34270	2	101	18	green	10
34271	2.5	113	20	turquoise	10
34272	3	128	23	light blue	10
34273	4	142	29	purple	10
34274	5	163	33	red	10
34275	6	184	38	orange	10
34276	8	206	44	yellow	10
34277	10	231	50	grey	5



NEW

369T S9

Ball end hex L-key set in ProStar. Chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Specially for hard-to-reach screws and confined spaces.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others. Increase in the hand working space of over 30% and thus a reduction of risk of injury to the knuckles and fingertips thanks to 95° bend of the L-key. Improved access through a reduction of the L-key head height of up to 15%. The ball end enables the user to work at angles up to 25°.

Order-No.	☰
35480	369T S9 5
●	369T 1.5 2 2.5 3 4
	5 6 8 10

NEW

SB 369T S9

Ball end hex L-key set in ProStar. Chrome-plated, 9 pcs. Blister packed.

Order-No.	☰
35481	SB 369T S9 5



369 H9F

Hexagon ball end L-key set in Classic holder.

Blade: Chrome vanadium steel, through-hardened, colour-coded.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys. The ball end enables the user to work at angles up to 25°. Colour coding for immediate identification of L-keys.

Order-No.	☰
34268	369 H9F 5
●	369F 1.5 2 2.5 3 4
	5 6 8 10

NEW

SB 369 H9F

Hexagon ball end L-key set in Classic holder. In blister pack.

Order-No.	☰
35683	SB 369 H9F



Wiha hexagon L-key (metric).

For Allen screws (metric).



369 Ball end hex L-key, long.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	●	↩	⇄	⇄
01392	1.5	91	15	10
01393	2	101	18	10
01395	2.5	113	20	10
01396	3	128	23	10
01398	4	142	29	10
01400	5	163	33	10
01402	6	184	38	10
07922	7	195	39	5
01404	8	206	44	10
01406	10	231	50	5
01408	12	259	57	5
36452	9	217	47	NEW 5

SB 369 Ball end hex L-key, long. Blister packed.

Order-No.	●	↩	⇄	⇄
08161	1.5	91	15	10
08162	2	101	18	10
08163	2.5	113	20	10
08164	3	128	23	10
08165	4	142	29	10
08166	5	163	33	10
08167	6	184	38	10
08168	8	206	44	5
08169	10	231	50	5
08170	12	259	57	5



369 SVH1 Display ball end hex L-key sets. Chrome-plated, in ProStar holder, 9 pcs. Card display with 10 pieces.

Order-No.	Content	●	⇄
07194	10 x 369 S9	1.5 - 10	1

For Allen screws (metric).



369 S9 Ball end hex L-key set in ProStar. Chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others.
 The ball end enables the user to work at angles up to 25°.

Order-No.	⇄
07185	369 S9 5
●	369 1.5 2 2.5 3 4 5 6 8 10

SB 369 S9 Ball end hex L-key set in ProStar. Chrome-plated, 9 pcs. Blister packed.

Order-No.	⇄
07192	SB 369 S9 5



NEW 369 SVH2 Display ball end hex L-key sets. Chrome-plated, in ProStar holder, 9 pcs. Card display with 5 pieces.

Order-No.	Content	●	⇄
36129	5 x 369 S9	1.5 - 10	1



For Allen screws (metric).



NEW

369 H11 Hexagon ball end L-key set in Compact holder.
Chrome-plated, 11 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Thanks to its compact form the Wiha Compact holder fits perfectly into any folding rule pocket.
 The ball end enables the user to work at angles up to 25°. Including SW 7 and SW 9 special sizes.

Order-No.											
36453	369 H11										5
●	369	1.5	2	2.5	3	4	5				
		6	7	8	9	10					

For Allen screws (metric).



369 H7 Hexagon ball end L-key set in Classic holder.
Chrome-plated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys. The ball end enables the user to work at angles up to 25°.

Order-No.											
01416	369 H7										5
●	369	1.5	2	2.5	3	4	5				
		6									

NEW

SB 369 H11 Hexagon ball end L-key set in Compact holder.
Chrome-plated, 11 pcs.
 In blister pack.

Order-No.											
36454	SB 369 H11										5

SB 369 H7 Hexagon ball end L-key set in Classic holder.
Chrome-plated, 7 pcs.
 Blister packed.


Order-No.											
03723	SB 369 H7										10



369 H9 Hexagon ball end L-key set in Compact holder.
Chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket. Popular key sizes kept in a well-organised holder. The ball end enables the user to work at angles up to 25°.

Order-No.											
01418	369 H9										5
●	369	1.5	2	2.5	3	4	5				
		6	8	10							

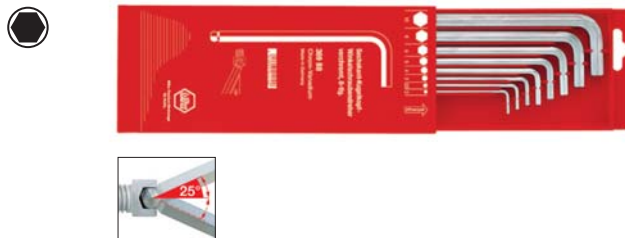

369 B8 Ball end hex L-key set in sliding box.
Chrome-plated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Large, impact resistant sliding box. The ball end enables the user to work at angles up to 25°.

Order-No.											
01410	369 B8										5
●	369	2	2.5	3	4	5					
		6	8	10							

SB 369 H9 Hexagon ball end L-key set in Compact holder.
Chrome-plated, 9 pcs.
 Blister packed.

Order-No.											
02292	SB 369 H9										5



Wiha hexagon L-key (metric).

For Allen screws (metric).



369B Ball end hex L-key, long.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	●	┌	└	└
01391	1.3	74	14	10
05638	1.5	91	15	10
03868	2	101	18	10
03869	2.5	113	20	10
03870	3	128	23	10
03871	4	142	29	10
03872	5	163	33	10
03873	6	184	38	10
03874	8	206	44	10
03875	10	231	50	5
03876	12	259	57	5

For Allen screws (metric).



369 SVH1B Display ball end hex L-key sets.
 Manganese-phosphated, in ProStar, 9 pcs.
 Carton display with 10 pieces.

Order-No.	Content	●	└
07195	10 x 369 S9B	1.5 - 10	1



369 S9B Ball end hex L-key set in ProStar. Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others.
 The ball end enables the user to work at angles up to 25°.

Order-No.						└	
07186	369 S9B					5	
●	369B	1.5	2	2.5	3	4	5
		6	8	10			

SB 369 S9B Ball end hex L-key set in ProStar. Manganese-phosphated, 9 pcs. Blister packed.

Order-No.						└
07193	SB 369 S9B					5



369 H9B Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Popular key sizes kept in a well-organised holder.
 Simple, rapid operation with solid stopping point for L-keys.
 The ball end enables the user to work at angles up to 25°.

Order-No.						└	
03879	369 H9B					5	
●	369B	1.5	2	2.5	3	4	5
		6	8	10			

SB 369 H9B Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 9 pcs. Blister packed.

Order-No.						└
03992	SB 369 H9B					5



For Allen screws (metric).



369 H7B Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ISO 2936L.
 Application: Especially for screws that are difficult to access.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys. The ball end enables the user to work at angles up to 25°.

Order-No.							
03878	369 H7B						5
●	369B	1.5	2	2.5	3	4	5
		6					

SB 369 H7B Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 7 pcs. Blister packed.

Order-No.							
03991	SB 369 H7B						10



352 Hex L-key, long.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Standards: Based on ISO 2936L.

Order-No.	●	↔	↵	
01201	1.5	91	15	10
01202	2	101	18	10
01203	2.5	113	20	10
01204	3	128	23	10
01206	4	142	29	10
01207	5	163	33	10
01208	6	184	38	10
01209	7	194	41	5
01210	8	206	44	10
01211	10	231	50	5
01212	12	259	57	5
01213	14	291	70	5
01214	17	333	80	5
01215	19	375	89	5
36450	9	217	47	NEW

For Allen screws (metric).



352 S9 Hexagon L-key set in ProStar holder. Nickel-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Standards: Based on ISO 2936L.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.							
07181	352 S9						5
●	352	1.5	2	2.5	3	4	5
		6	8	10			

SB 352 S9 Hexagon L-key set in ProStar holder. Nickel-plated, 9 pcs. Blister packed.

Order-No.							
07190	SB 352 S9						5



NEW
352 H11 Hexagon ball end L-key set in Compact holder. Bright nickel-plated, 11 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Standards: Based on ISO 2936L.
 Extra: Thanks to its compact form the Wiha Compact holder fits perfectly into any folding rule pocket. Including SW 7 and SW 9 special sizes.

Order-No.							
36451	352 H11						5
●	352	1.5	2	2.5	3	4	5
		6	7	8	9	10	



Wiha hexagon L-key (metric).

For Allen screws (metric).



352 H9 Hexagon L-key set in Compact holder.

Nickel-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: Based on ISO 2936L.

Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket. Popular key sizes kept in a well-organised holder.

Order-No.									
01222	352 H9								5
●	352	1.5	2	2.5	3	4	5		
		6	8	10					



352 H7 Hexagon L-key set in Classic holder.

Nickel-plated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: Based on ISO 2936L.

Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
01220	352 H7								5
●	352	1.5	2	2.5	3	4	5		
		6							



352 B8 Hex L-key set in sliding box.

Nickel-plated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: Based on ISO 2936L.

Extra: Large, impact resistant sliding box.

Order-No.									
01216	352 B8								5
●	352	2	2.5	3	4	5	6		
		8	10						

For Allen screws (metric).



352B Hex L-key, long.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.

Standards: Based on ISO 2936L.

Order-No.	●			
06358	0.7	67	6	5
06359	0.9	70	9	5
06360	1.3	80	13	5
06059	1.5	91	15	5
06361	2	101	18	5
06362	2.5	113	20	5
06363	3	128	23	5
06364	4	142	29	10
06365	5	163	33	10
06366	6	184	38	10
06367	7	194	41	5
06368	8	206	44	10
06369	10	231	50	5
06370	12	259	57	5
06371	14	291	70	5


Wiha Info

Colour-coding system:

- **red:**
metric hex blades
- **yellow:**
inch hex blades
- **green:**
TORX® blades
- **light green:**
TORX PLUS® blades



For Allen screws (metric).

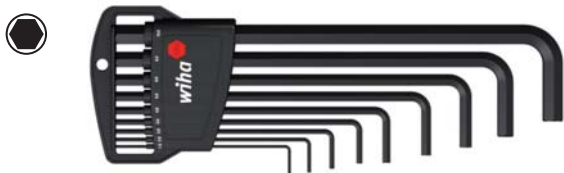

352 H9B Hexagon L-key set in Classic holder.
Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
06386	352 H9B								5
●	352B	1.5	2	2.5	3	4	5		
		6	8	10					



352 H7B Hexagon L-key set in Classic holder.
Manganese-phosphated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.								
06384	352 H7B							5
●	352B	1.5	2	2.5	3	4	5	
		6						



352 HM5B Hexagon L-key set in Classic holder.
Manganese-phosphated, 5 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Standards: Based on ISO 2936L.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.							
06382	352 HM5B						10
●	352B	0.7	0.9	1.3	1.5	2	

For Allen screws (metric).



351 Hex L-key, short.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.

Order-No.	●				
01144	1.5	46	15		10
01145	2	51	18		10
01146	2.5	57	20		10
01147	3	64	23		10
01148	3.5	70	26		5
01149	4	72	29		10
01150	4.5	80	31		5
01151	5	83	33		10
01152	5.5	90	35		5
01153	6	94	38		10
01154	7	99	41		5
01155	8	105	44		10
01156	9	114	47		5
01157	10	119	50		5
01158	11	129	53		5
01159	12	134	57		5
01160	14	151	70		5
01161	17	173	80		5
01162	19	195	89		5



NEW
351 H11 Hexagon ball end L-key set in Compact holder.
Bright nickel-plated, 11 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: ISO 2936K.
Extra: Thanks to its compact form the Wiha Compact holder fits perfectly into any folding rule pocket.
Including SW 7 and SW 9 special sizes.

Order-No.											
36449	351 H11										5
●	351	1.5	2	2.5	3	4	5				
		6	7	8	9	10					



Wiha hexagon L-key (metric).

For Allen screws (metric).



351 H9 Hexagon L-key set in Compact holder. Nickel-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: ISO 2936K.

Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket.
Popular key sizes kept in a well-organised holder.

Order-No.									
01174	351 H9								10
●	351	1.5	2	2.5	3	4	5		
		6	8	10					

SB 351 H9 Hexagon L-key set in Classic holder. Nickel-plated, 9 pcs. Blister packed.

Order-No.		
03734	SB 351 H9	5



351 H7 Hexagon L-key set in Classic holder. Nickel-plated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: ISO 2936K.

Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.									
01172	351 H7								10
●	351	1.5	2	2.5	3	4	5		
		6							

For Allen screws (metric).



351 B8 Hex L-key set in sliding box. Nickel-plated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: ISO 2936K.

Extra: Small, impact resistant sliding box.

Order-No.									
01166	351 B8								10
●	351	2	2.5	3	4	5	6		
		8	10						



351 R8 Hex L-key set on keyring. Nickel-plated, 8 pcs. In plastic pouch.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: ISO 2936K.

Extra: Flexible hanging of all keys on a keyring.

Order-No.									
01180	351 R8								10
●	351	2	2.5	3	4	5	6		
		8	10						



351 VB Hex L-key set in bench stand. Nickel-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.

Standards: ISO 2936K.

Extra: Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.									
01182	351 VB								1
●	351	2.5	3	4	5	6	8		
		10	12	14					



For Allen screws (metric).



359 Hex L-key with pivot.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Standards: DIN 6911.
 Application: Fits hex socket screws with low head and centre hole.
 With key guidance according to DIN 6912.

Order-No.	⊙	┌	└	┘
01255	3	64	23	10
01256	4	72	29	10
01257	5	83	33	10
01258	6	94	38	10
01259	8	105	44	10
01260	10	119	50	5
01261	12	134	57	5
01262	14	151	70	5
01263	17	173	80	5



NEW

359T5 Hexagon L-key set with pin in a roll-up pouch.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Standards: DIN 6911.
 Application: Fits hex socket screws with low head and centre hole.
 With key guidance according to DIN 6912.
 Extra: Robust roll-up pouches allows space-saving storage of tools.

Order-No.	⊙	┌	└	┘			
33391	359 T5			10			
	359	3	4	5	6	8	

For Allen screws (metric).



350 Hex L-key, short.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: ISO 2936K.

Order-No.	⊙	┌	└	┘
06218	1.3	41	13	10
01121	1.5	46	15	10
01122	2	51	18	10
01123	2.5	57	20	10
01124	3	64	23	10
01126	4	72	29	10
01128	5	83	33	10
01130	6	94	38	10
01131	7	99	41	10
01132	8	105	44	10
01133	9	112	47	5
01134	10	119	50	5
01135	11	126	53	5
01136	12	134	57	5
01137	14	151	70	5
01138	17	173	80	5
01139	19	195	89	5
01140	22	217	102	1
01141	24	241	114	1
01142	27	271	127	1
01143	32	339	157	1



350 H9 Hexagon L-key set in Classic holder. Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: ISO 2936K.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys.

Order-No.	⊙	┌	└	┘			
06379	350 H9			10			
	350	1.5	2	2.5	3	4	5
		6	8	10			



350 H7 Hexagon L-key set in Classic holder. Manganese-phosphated, 7 pcs.

Order-No.	⊙	┌	└	┘				
06378	350 H7			10				
	350	1.5	2	2.5	3	4	5	6

Wiha hexagon L-key (inch).

For Allen screws (inch).



369 Zoll Ball end hex L-key, long. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ASME B18.3.
 Application: Especially for inch-sized screws that are difficult to access.
 Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	●	↔	↕	mm	⊔
01422	0.05	72	13	1.27	10
01423	1/16	80	15	1.59	10
01431	5/64	88	18	1.98	10
01427	3/32	101	20	2.38	10
01433	7/64	111	21	2.78	10
01425	1/8	121	23	3.18	10
01434	9/64	136	27	3.57	10
01430	5/32	148	29	3.97	10
01426	3/16	163	33	4.76	10
01432	7/32	176	36	5.56	10
01424	1/4	191	38	6.35	10
01429	5/16	210	43	7.94	10
01428	3/8	232	50	9.53	5

For Allen screws (inch).



369 SZ13B Ball end hex L-key set in ProStar. Manganese-phosphated, 13 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ASME B18.3.
 Application: Especially for inch-sized screws that are difficult to access.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.	⊔
24189	369 SZ13B 5
●	369 Zoll 0.05 1/16 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4 5/16 3/8

SB 369 SZ13B Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 13 pcs. Inch sizes. Blister packed.

Order-No.	⊔
24851	SB 369 SZ13B 5



369 HZ8 Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 8 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Standards: Based on ASME B18.3.
 Application: Especially for inch-sized screws that are difficult to access.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys.

Order-No.	⊔
01420	369 HZ8 5
●	369 Zoll 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16

SB 369 HZ8 Hexagon ball end L-key set in Classic holder. Manganese-phosphated, 8 pcs. Inch sizes. Blister packed.

Order-No.	⊔
02939	SB 369 HZ8 10

For Allen screws (inch).



351 Zoll Hex L-key, short.
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ASME B18.3.
Application: For all popular inch screws.

Order-No.	●	⌘	⌘	mm	⌘
25626	0.05	41	13	1.27	10
01184	1/16	47	16	1.59	10
01194	5/64	51	18	1.98	10
01189	3/32	55	22	2.38	10
22406	7/64	58	21	2.78	10
01187	1/8	61	23	3.18	10
01200	9/64	65	25	3.57	10
01193	5/32	72	29	3.97	10
01188	3/16	76	30	4.76	10
01197	7/32	84	34	5.56	10
01186	1/4	94	37	6.35	10
01192	5/16	106	43	7.94	10
01191	3/8	117	48	9.53	5
01185	1/2	143	59	12.70	5
01198	9/16	158	64	14.29	5
01195	5/8	176	71	15.88	5
01190	3/4	198	89	19.05	5

For Allen screws (inch).



351 SZ13 Hexagon L-key set in ProStar holder.
Nickel-plated, 13 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ASME B18.3.
Application: For all popular inch screws.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.	●	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	
25610	351 SZ13																5
	351 Zoll	0.05	1/16	5/64	3/32	7/64	1/8										
		9/64	5/32	3/16	7/32	1/4	5/16										
		3/8															



351 HZ8 Hexagon L-key set in Classic holder.
Nickel-plated, 8 pcs. Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Standards: Based on ASME B18.3.
Application: For all popular inch screws.
Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys.

Order-No.	●	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘	⌘
01176	351 HZ8																10
	351 Zoll	5/64	3/32	1/8	5/32	3/16	7/32										
		1/4	5/16														

Wiha Info

Colour-coding system:

- **red:**
metric hex blades
- **yellow:**
inch hex blades
- **green:**
TORX® blades
- **light green:**
TORX PLUS® blades



Wiha TORX® MagicSpring®.

Holds TORX® and TORX PLUS® screws securely in place.



Wiha MagicSpring®:
a stainless steel spring
securely holds TORX®
and TORX PLUS® screws.

No more annoying and time-consuming hunting around for TORX® or TORX PLUS® screws that have apparently vanished into thin air. With Wiha's ingenious new tool, the MagicSpring®, TORX® or TORX PLUS® screws* are kept firmly where you want them. The highlight of the "MagicSpring®" tools is the stainless steel "magical" retaining spring that, together with a thin cover disc, is laser-welded to the tip of the blade.

This completely new innovation acts as a clamp between tool and TORX® or TORX PLUS® screw, so that the latter is firmly gripped by the tip of the blade. The new tools are especially beneficial when turning particularly small screws or when turning screws in areas that are difficult to access. Simply place the screw on the tip of the blade and start to turn. No more screws will fall to the ground or disappear between components.



Insertion and removal of TORX® and TORX PLUS® screws is safe and comfortable thanks to MagicSpring® from Wiha.

** TORX® and TORX PLUS® screws manufactured according to Camcar Textron specifications.*



As the clamping action is purely mechanical, MagicSpring® also gets a firm grip on TORX® or TORX PLUS® screws made of aluminium, stainless steel, plastic and titanium.



The retaining spring is a completely new technical solution that, together with a thin cover disc, is laser-welded to the tip of the blade.



Wiha TORX® MagicSpring®.

- MagicSpring® retaining spring made of stainless steel gets a firm hold on every TORX® or TORX PLUS® screw
- No more annoying searching for dropped screws
- Ideal for areas that are difficult to access
- Made of high-quality materials in the renowned Wiha quality
- Also suitable for TORX® or TORX PLUS® screws made of aluminium, stainless steel, plastic and titanium



For TORX® screws.



366R TORX® MagicSpring® L-key, long.
Retaining spring holds TORX® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For setting and tightening TORX® screws in difficult to access areas.

Order-No.	⊕	⌒	⌒	⊕	⌒
31233	T6	80	15	1/16	10
31234	T7	88	18	5/64	10
31235	T8	101	20	3/32	10
31236	T9	111	21	7/64	10
31237	T10	121	23	1/8	10
31238	T15	136	27	9/64	10
31239	T20	148	29	5/32	10
31240	T25	163	33	3/16	10
31241	T27	176	36	7/32	10
31242	T30	191	38	1/4	10
31243	T40	210	43	5/16	10
31244	T45	232	50	3/8	10

For TORX® screws.



NEW
366R HZ13 TORX® MagicSpring® L-key set in ErgoStar holder.
Manganese-phosphated, 13 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For setting and tightening TORX® screws in difficult to access areas.
Extra: Mechanical operation of the space-saving ErgoStar holder makes simplest removal of each individual L-key possible without movement of the others.
Fastening spring (from size T6) firmly holds TORX® screws.

Order-No.														⌒
36503	366R HZ13												5	
⊕	366	T5												
⊕	366R	T6	T7	T8	T9	T10	T15							
		T20	T25	T27	T30	T40	T45							

NEW
SB 366R HZ13 TORX® MagicSpring® L-key set in ErgoStar holder.
Manganese-phosphated, 13 pcs.
In blister pack.

Order-No.														⌒
36504	SB 366R HZ13												5	

reddot design award
winner 2010

Focus Open
Silver 2011

Wiha Info



Wiha ErgoStar
The right idea:
a flowing movement means all L-keys
are ready for removal.

Wiha Info



Wiha MagicSpring®:
stainless steel spring
reliably holds TORX® or
TORX PLUS® screws in place.



Wiha TORX® MagicSpring®.

Holds TORX® and TORX PLUS® screws securely in place.

For TORX® screws.



366R SZ13 TORX® MagicSpring® L-key set in ProStar holder, 13-pcs.

Retaining spring holds TORX® screws in place.

- Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
- Application: For setting and tightening TORX® screws in difficult to access areas.
- Extra: Makes simple removal of each individual key possible without movement of the others.

Order-No.							
31492	366R SZ13						5
☉	366	T5					
☉	366R	T6	T7	T8	T9		
		T10	T15	T20	T25		
		T27	T30	T40	T45		

SB 366R SZ13 TORX® MagicSpring® L-key set in ProStar holder, 13-pcs.
Blister packed.

Order-No.							
31923	SB 366R SZ13						5

For TORX® screws.



366R H8 TORX® MagicSpring® L-key set in Classic holder, 8-pcs.

Retaining spring holds TORX® screws in place.

- Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
- Application: For setting and tightening TORX® screws in difficult to access areas.
- Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys.

Order-No.						
34740	366R H8					5
☉	366R	T9	T10	T15	T20	
		T25	T27	T30	T40	

SB 366R H8 TORX® MagicSpring® L-key set in Classic holder, 8-pcs.
Retaining spring holds TORX® screws in place.
Blister packed.

Order-No.						
34741	SB 366R H8					10



366R HM7 TORX® MagicSpring® L-key set in Classic holder, 7-pcs.

Retaining spring holds TORX® screws in place.

- Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
- Application: For setting and tightening TORX® screws in difficult to access areas.
- Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys.

Order-No.						
33753	366R HM7					5
☉	366R	T6	T7	T8	T9	
		T10	T15	T20		

SB 366R HM7 TORX® MagicSpring® L-key set in Classic holder, 7-pcs.
Retaining spring holds TORX® screws in place.
Blister packed.

Order-No.						
33754	SB 366R HM7					5



For TORX PLUS® screws.



371RIP TORX PLUS® L-key.
With MagicSpring®.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX PLUS® screw tasks.
 Extra: MagicSpring® made from stainless steel holds TORX PLUS®-screws tight at various angles.
 The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.

Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	⊙	↶	↷	⊙	↶
29197	6IP	65	16	1/16	10
29198	7IP	71	18	5/64	10
29199	8IP	77	20	3/32	10
29200	9IP	83	22	7/64	10
29201	10IP	90	24	1/8	10
29202	15IP	97	26	9/64	10
29203	20IP	104	29	5/32	10
29204	25IP	112	33	3/16	10
29205	27IP	122	36	7/32	10
29206	30IP	132	40	1/4	10
29207	40IP	143	44	5/16	10

For TORX PLUS® screws.



371RIP H8 TORX PLUS® MagicSpring® L-key set in Classic holder, 8-pcs.
Retaining spring holds TORX PLUS® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX PLUS® screw tasks.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys. MagicSpring® made from stainless steel holds TORX PLUS®-screws tight at various angles.

Order-No.	⊙	↶	↷	⊙	↶
34742	371RIP H8				5
	371RIP	9IP	10IP	15IP	20IP
		25IP	27IP	30IP	40IP



371RIP HM7 TORX PLUS® MagicSpring® L-key set in Classic holder, 7-pcs.
Retaining spring holds TORX PLUS® screws in place.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX PLUS® screw tasks.
 Extra: Popular key sizes kept in a well-organised holder. Simple, rapid operation with solid stopping point for L-keys. MagicSpring® made from stainless steel holds TORX PLUS®-screws tight at various angles.

Order-No.	⊙	↶	↷	⊙	↶
29208	371RIP HM7				5
	371RIP	6IP	7IP	8IP	9IP
		10IP	15IP	20IP	


Wiha Info

Wiha MagicSpring®:
 stainless steel spring
 reliably holds TORX® or
 TORX PLUS® screws in place.



Wiha TORX® ball end.

Simpler, more powerful, safer.



Plenty of room to manoeuvre: The ball end enables access to the TORX® screw at an angle of up to 25°.

Tight spaces that only allow fastening and unfastening in at an angle: In these "problem zones" for TORX® screws, Wiha TORX® ball end tools are in demand. The advantages for the user are obvious: With the improved geometry of the ball end, TORX® screws can now be screwed in and out even at angles up to 25°. As a result, maximum torques are no longer a problem even in difficult installation positions. Wearing of the tool and screw head is noticeably reduced.

And Wiha is also pursuing a different path in production. Thanks to an innovative manufacturing process, cold forming, the TORX® ball end gains a great deal of strength.

So that these advantages benefit a broad range of applications, the

Wiha TORX® ball end is integrated in several types of tools and is available in proven Wiha quality:

- as an L-key in sizes T9 to T40, separately or as a set with a holder
- as a bit with the lengths 50, 70 and 90 mm
- as a screwdriver with the ergonomic SoftFinish® handle, through-hardened, brushed chrome-plated blade and precision-fitting ChromTop® blade tip

Thanks to their ruggedness, flexibility and diversity, Wiha TORX® ball end tools are indispensable for any user who has to depend on a long tool life under difficult working conditions.



With elongated TORX® profile behind ball end.



Wiha TORX® ball end.

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose
- Enables fastening and unfastening at angles of 25°
- Simple insertion of the tool/bit and fastening/unfastening, especially in hard-to-reach locations
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver



For TORX® screws.



366BE TORX® ball end L-key, long.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all hard-to-reach TORX® screws.
 Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°. With elongated TORX® profile behind ball end.

Order-No.	✳	↔	└┘	●	▬
32386	T9	111	21	7/64	10
32387	T10	121	23	1/8	10
32388	T15	136	27	9/64	10
32389	T20	148	29	5/32	10
32390	T25	163	33	3/16	10
32391	T27	176	36	7/32	10
32392	T30	191	38	1/4	10
32393	T40	210	43	5/16	10
33749	T45	232	50	3/8	10
33750	T50	232	50	3/8	10

For TORX® screws.



NEW

366BE HZ13 TORX® ball end L-key set in ErgoStar holder. Manganese-phosphated, 13 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all hard-to-reach TORX® screws.
 Extra: Mechanical operation of the space-saving ErgoStar holder makes simplest removal of each individual L-key possible without movement of the others. TORX® ball end (from T9 size) enables fastening at an angle of up to 25°. With elongated TORX® profile behind ball end.

Order-No.	▬					
36487	366BE HZ13					5
✳	366	T5	T6	T7	T8	
✳	366BE	T9	T10	T15	T20	
		T25	T27	T30	T40	
		T45				

NEW

SB 366BE HZ13 TORX® ball end L-key set in ErgoStar holder. Manganese-phosphated, 13 pcs. In blister pack.

Order-No.	▬					
36486	SB 366BE HZ13					5



Wiha Info



Wiha ErgoStar
 The right idea:
 a flowing movement means all L-keys
 are ready for removal.





Wiha TORX® ball end L-keys.

For TORX® screws.



366BE SZ13 TORX® ball end L-key set in ProStar holder.
Manganese-phosphated, 13 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all hard-to-reach TORX® screws.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.						
33751	366BE SZ13					5
	366	T5	T6	T7	T8	
	366BE	T9	T10	T15	T20	
		T25	T27	T30	T40	
		T45				

SB 366BE SZ13 TORX® ball end L-key set in ProStar holder.
Manganese-phosphated, 13 pcs.
Blister packed.

Order-No.						
33752	SB 366BE SZ13					5

For TORX® screws.



366BE H8 TORX® ball end L-key set in Classic holder.
Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
Application: For all hard-to-reach TORX® screws.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

Order-No.						
32394	366BE H8					5
	366BE	T9	T10	T15	T20	
		T25	T27	T30	T40	

SB 366BE H8 TORX® ball end L-key set in Classic holder.
Manganese-phosphated, 8 pcs.
Blister packed.

Order-No.						
32395	SB 366BE H8					10



Wiha TORX® L-keys.

For TORX® screws.



366 TORX® L-key, long.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications.

Order-No.	⊕	↔	⊥	⊙	⊖
24313	T5	72	13	0.05	10
24314	T6	80	15	1/16	10
24315	T7	88	18	5/64	10
24316	T8	101	20	3/32	10
24317	T9	111	21	7/64	10
24318	T10	121	23	1/8	10
24319	T15	136	27	9/64	10
24320	T20	148	29	5/32	10
24321	T25	163	33	3/16	10
24322	T27	176	36	7/32	10
24323	T30	191	38	1/4	10
24324	T40	210	43	5/16	10
24325	T50	232	50	3/8	10

For TORX® screws.



366 H8 TORX® L-key set in Classic holder.
 Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications.
 Extra: Popular key sizes kept in a well-organised holder.
 Simple, rapid operation with solid stopping point for L-keys.

Order-No.	⊕	↔	⊥	⊙	⊖
34736	366 H8				5
	366	T9	T10	T15	T20
		T25	T27	T30	T40

SB 366 H8 TORX® L-key set in Classic holder.
 Manganese-phosphated, 8 pcs.
 Blister packed.

Order-No.	⊕	↔	⊥	⊙	⊖
34737	SB 366 H8				10



366 SZ13 TORX® L-key set in ProStar holder.
 Manganese-phosphated, 13 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications.
 Extra: Space saving ProStar allows the easy removal of each key without moving any others.
 All keys from T5 to T50 in one set.

Order-No.	⊕	↔	⊥	⊙	⊖
24312	366 SZ13				5
	366	T5	T6	T7	T8
		T9	T10	T15	T20
		T25	T27	T30	T40
		T50			

SB 366 SZ13 TORX® L-key set in ProStar holder.
 Manganese-phosphated, 13 pcs.
 Blister packed.

Order-No.	⊕	↔	⊥	⊙	⊖
24852	SB 366 SZ13				5



366 H7 TORX® L-key set in Classic holder.
 Manganese-phosphated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications.
 Extra: Popular key sizes kept in a well-organised holder.
 Simple, rapid operation with solid stopping point for L-keys.

Order-No.	⊕	↔	⊥	⊙	⊖
34738	366 H7				5
	366	T6	T7	T8	T9
		T10	T15	T20	

SB 366 H7 TORX® L-key set in Classic holder.
 Manganese-phosphated, 7 pcs.
 Blister packed.

Order-No.	⊕	↔	⊥	⊙	⊖
34739	SB 366 H7				5

Wiha TORX® L-keys.

For TORX® screws.



363 TORX® L-key, short.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications in confined work spaces.

Order-No.	Blade	Length	Width	Tip	Quantity
03764	T5	39	18	2.5	10
01310	T6	41	18	2.5	10
01311	T7	44	18	2.5	10
01312	T8	47	18	2.5	10
01313	T9	51	19	3.0	10
01314	T10	54	20	3.0	10
01315	T15	57	22	3.5	10
01316	T20	62	23	4.0	10
01317	T25	67	25	4.5	10
01318	T27	72	27	5.5	10
01319	T30	79	30	6.0	10
01320	T40	86	33	7.0	10
01321	T45	90	36	8.0	10
01322	T50	104	41	9.0	10
01323	T55	120	47	12.0	10
01324	T60	134	52	14.0	10



363 VB TORX® L-key set in bench stand. Manganese-phosphated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications in confined work spaces.
 Extra: Robust metal workbench holder to place on workbench or wall-mount. Tip diagrams printed to scale.

Order-No.	Blade	Length	Width	Tip	Quantity
01326	363 VB				1
363	T10	T15	T20	T25	5
	T30	T40	T50	T55	
	T60				

For TORX® and XZN® multipoint socket screws.



NEW 363 H8 TORX® L-key set in Classic holder. Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications in confined work spaces.
 Extra: Common key sizes are clearly stored in the Classic holder.

Order-No.	Blade	Length	Width	Tip	Quantity
36461	363 H8				5
363	T9	T10	T15	T20	5
	T25	T27	T30	T40	

NEW SB 363 H8 TORX® L-key set in Classic holder. Manganese-phosphated, 8 pcs. Blister packed.

Order-No.	Blade	Quantity
36457	SB 363 H8	5



NEW 363 H7 TORX® L-key set in Classic holder. Manganese-phosphated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For all TORX® screw applications in confined work spaces.
 Extra: Common key sizes are clearly stored in the Classic holder.

Order-No.	Blade	Length	Width	Tip	Quantity
36460	363 H7				5
363	T6	T7	T8	T9	5
	T10	T15	T20		



355 XZN® L-key, short. Chrome-vanadium steel, through hardened, nickel-plated.

Order-No.	Blade	Length	Width	Tip	Quantity
01243	M5	76	30		10
01244	M6	86	34		10
01245	M8	98	38		10
01246	M10	110	46		10
01247	M12	124	52		10
01248	M14	138	58		10
01249	M16	156	71		10

For TORX® Tamper Resistant screws.



363TR TORX® Tamper Resistant L-key, short.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For popular TORX® Tamper Resistant screws (with security pin).
 Extra: Borehole in every blade tip.

Order-No.	⊗	↔	└┘	●	⊖
24105	T7H	44	18	2.5	10
24107	T8H	47	18	2.5	10
24109	T9H	51	19	3.0	10
24111	T10H	54	20	3.0	10
24113	T15H	57	22	3.5	10
24115	T20H	62	23	4.0	10
24117	T25H	67	25	4.5	10
24119	T27H	72	27	5.5	10
24121	T30H	79	30	6.0	10
24123	T40H	86	33	7.0	10

For TORX PLUS® screws.



361IP TORX PLUS® L-key, short.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For popular TORX PLUS® screws.
 Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.

Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	⊗	↔	└┘	●	⊖
24513	6IP	41	18	2.5	10
24515	7IP	44	18	2.5	10
24517	8IP	47	18	2.5	10
24519	9IP	51	19	3.0	10
24521	10IP	54	20	3.0	10
24523	15IP	58	22	3.5	10
24525	20IP	62	23	4.0	10
24527	25IP	67	25	4.5	10
24529	27IP	73	27	5.5	10
24531	30IP	79	30	6.0	10
24533	40IP	88	33	7.0	10



NEW

363TR H8 TORX® Tamper Resistant L-key set in Classic holder. Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For popular TORX® Tamper Resistant screws (with security pin).
 Extra: Common key sizes are clearly stored in the Classic holder. Borehole in every blade tip.

Order-No.	⊗	↔	└┘	●	⊖
36462	363TR H8				5
		T9H	T10H	T15H	T20H
		T25H	T27H	T30H	T40H

NEW

SB 363TR H8 TORX® Tamper Resistant L-key set in Classic holder. Manganese-phosphated, 8 pcs. In blister pack.

Order-No.	⊗	↔	└┘	●	⊖
36458	SB 363TR H8				5



NEW

361IP H8 TORX PLUS® L-key set in Classic holder. Manganese-phosphated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, manganese-phosphated.
 Application: For popular TORX PLUS® screws.
 Extra: Common key sizes are clearly stored in the Classic holder.

Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	⊗	↔	└┘	●	⊖
36459	361IP H8				5
		9IP	10IP	15IP	20IP
		25IP	27IP	30IP	40IP


NEW

SB 361IP H8 TORX PLUS® L-key set in Classic holder. Manganese-phosphated, 8 pcs. In blister pack.

Order-No.	⊗	↔	└┘	●	⊖
36456	SB 361IP H8				5

Wiha PocketStar.

Press one button for the correct key.



The unique opening mechanism facilitates an easy selection of the desired key size.

The Wiha PocketStar fold out offers optimum handling and a wide variety of uses, which are expressed in the form of many practical details.

The ingenious opening mechanism facilitates the simple selection of the required key size from the glass-fibre-reinforced holder.

Wiha solved an important demand of fold-out users: When turning a key into working position only this one moves. The remaining keys stay where they are.

The various working positions offer universal use:

- In the 180° position, the PocketStar is used as a screwdriver.
- 270° stop limit for using the tool as practical lever for high torques.
- Any position can be set between 90° and 270° for a variety of different work applications.



The 270° stop limit when working on applications with higher safety requirements puts an end to trapped fingers.



Three flicks of the wrist and you have an effective screwdriver: take it out of the pocket, press the button and adjust the desired key to 180° or 270°.

Wiha PocketStar.

- Innovative opening mechanism for simple selection of the desired key size
- Particularly suitable for use as screwdriver when the blade axis is set at 180° or as practical lever with blade in 270° position
- Ergonomic, glass-fibre-reinforced holder guarantees the easy transfer of even the highest torques
- Can be rotated by any angle between 270° and 90° to save time when working on applications where space is tight
- 270° stop limit for higher safety puts an end to trapped fingers
- Colour-coding system for different drives and dimensional systems delivers great clarity when using several PocketStars
- Covered hex key axes prevents catching on clothes

For Allen screws (metric).



369R P7 Ball end hex fold out holder PocketStar.
 With MagicRing®, in large PocketStar, 7 pcs.
 Blade: Chrome-vanadium steel, through hardened, electro-plated.
 Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
 Application: Practical fold out holder for hex screws in the workplace or on the job. Insert screws into or remove from boreholes, especially in difficult to access areas.
 Extra: Robust casing with eject button for simple and easy key selection. MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position. The ball end enables the user to work at angles up to 25°.

Order-No.						
23031	369R P7	5				
●		2	2.5	3	4	5
		6	8			

SB 369R P7 Ball end hex fold out holder PocketStar.
 With MagicRing®, in large PocketStar, 7 pcs.
 Blister packed with hanging hole.

Order-No.						
23033	SB 369R P7	5				

For Allen screws (metric).



351 PG7 Hex fold out holder PocketStar.
 In large PocketStar, 7 pcs.
 Blade: Chrome-vanadium steel, through hardened, electro-plated.
 Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
 Application: Practical fold out holder for hex screws in the workplace or on the job.
 Extra: Robust casing with eject button for simple and easy key selection.

Order-No.						
23040	351 PG7	5				
●		2	2.5	3	4	5
		6	8			

SB 351 PG7 Hex fold out holder PocketStar.
 In large PocketStar, 7 pcs.
 Blister packed with hanging hole.

Order-No.						
23041	SB 351 PG7	5				



351 PK7 Hex fold out holder PocketStar.
 In small PocketStar, 7 pcs.
 Blade: Chrome-vanadium steel, through hardened, electro-plated.
 Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
 Application: Practical fold out holder for hex screws in the workplace or on the job.
 Extra: Robust casing with eject button for simple and easy key selection.

Order-No.						
23035	351 PK7	5				
●		1.5	2	2.5	3	4
		5	6			

SB 351 PK7 Hex fold out holder PocketStar.
 In small PocketStar, 7 pcs.
 Blister packed with hanging hole.

Order-No.						
23037	SB 351 PK7	5				

Wiha Info

Colour-coding system:

- red: metric hex blades
- yellow: inch hex blades
- green: TORX® blades
- light green: TORX PLUS® blades



Wiha PocketStar.

Press one button for the correct key.

Mixed sets.



351 PG9X Fold out holder PocketStar containing assorted keys.
In large PocketStar, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for hex, slotted, Phillips and TORX® screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.					
25293	351 PG9X				5
⓪	4.5				
⊕	PH2				
⊛	T10	T15	T20		
●	3	4	5	6	

SB 351 PG9X Fold out holder PocketStar containing assorted keys.
In large PocketStar, 9 pcs.
Blister packed with hanging hole.

Order-No.			
25295	SB 351 PG9X		5



351 PK6X Fold out holder PocketStar containing assorted keys.
In small PocketStar, 6 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
Application: Practical fold out holder for hex, slotted and Phillips screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.					
24859	351 PK6X				5
⓪	5.5				
⊕	PH2				
●	3	4	5	6	

SB 351 PK6X Fold out holder PocketStar containing assorted keys.
In small PocketStar, 6 pcs.
Blister packed with hanging hole.

Order-No.			
24861	SB 351 PK6X		5

For TORX® screws.



363 P8 TORX® fold out holder PocketStar.
In large PocketStar, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
Application: Practical fold out holder for TORX® screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.							
23047	363 P8						5
⊛	T9	T10	T15	T20	T25	T27	
	T30	T40					

SB 363 P8 TORX® fold out holder PocketStar.
In large PocketStar, 8 pcs.
Blister packed with hanging hole.

Order-No.			
23049	SB 363 P8		5



363 P7 TORX® fold out holder PocketStar.
In small PocketStar, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
Application: Practical fold out holder for TORX® screws in the workplace or on the job.
Extra: Robust casing with eject button for simple and easy key selection.

Order-No.							
23051	363 P7						5
⊛	T7	T8	T9	T10	T15	T20	
	T25						

SB 363 P7 TORX® fold out holder PocketStar.
In small PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.			
23053	SB 363 P7		5



For TORX® Tamper Resistant screws.



363TR P8 TORX® Tamper Resistant fold out holder PocketStar.
 In large PocketStar, 8 pcs.
 Blade: Chrome-vanadium steel, through hardened, electro-plated.
 Handle: Ergonomic, reinforced fibreglass housing, 120 mm long.
 Application: Practical fold out holder for TORX® Tamper Resistant (with security pin) screws in the workplace or on the job.
 Extra: Robust casing with eject button for simple and easy key selection.
 Borehole in every blade tip.

Order-No.							
25130	363TR P8						5
	T9H	T10H	rT15H	T20H	T25H	T27H	
	T30H	T40H					

SB 363TR P8 TORX® Tamper Resistant fold out holder PocketStar.
 In large PocketStar, 8 pcs.
 Blister packed with hanging hole.

Order-No.							
25166	SB 363TR P8						5



363TR P7 TORX® Tamper Resistant fold out holder PocketStar.
 In small PocketStar, 7 pcs.
 Blade: Chrome-vanadium steel, through hardened, electro-plated.
 Handle: Ergonomic, reinforced fibreglass housing, 95 mm long.
 Application: Practical fold out holder for TORX® Tamper Resistant (with security pin) screws in the workplace or on the job.
 Extra: Robust casing with eject button for simple and easy key selection.
 Borehole in every blade tip.

Order-No.							
25128	363TR P7						5
	T7H	T8H	T9H	T10H	T15H	T20H	
	T25H						

SB 363TR P7 TORX® Tamper Resistant fold out holder PocketStar.
 In small PocketStar, 7 pcs.
 Blister packed with hanging hole.

Order-No.							
25164	SB 363TR P7						5

Displays.



351 PG7 VH1 Display hex fold out holder PocketStar.
 In large PocketStar, 7 pcs.
 Carton display with 10 pieces.

Order-No.	Content		
23502	10 x 351 PG7	2 - 8	1



351 PG9X VH1 Display fold out holder PocketStar containing assorted keys.
 In large PocketStar, 9 pcs.
 Carton display with 10 pieces.

Order-No.	Content		
25297	10 x 351 PG9X		1




363 P8 VH1 Display TORX® fold out holder PocketStar.
 In large PocketStar, 8 pcs.
 Carton display with 10 pieces.

Order-No.	Content		
23503	10 x 363 P8	T9 - T40	1



Wiha Mini PocketStar.

The smallest blade at the push of a button.




The unique opening mechanism facilitates an easy selection of the desired key size.


Who hasn't spent ages looking for the small SW 0.9 hex key or for other small keys?

Wiha has developed an extremely smart solution to solve exactly this problem: the Mini PocketStar, a small practical helper that is an absolute must in the toolbox of every service and customer-service engineer.

Regardless of whether replacing a proximity switch or pneumatic control unit, or whether adjusting the sensitivity of a light barrier. With the Mini PocketStar, all keys are within reach.

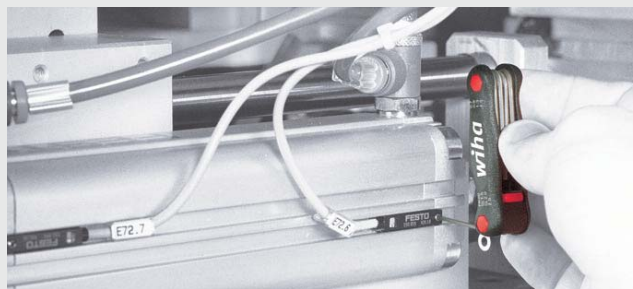

Small but effective. The Mini PocketStar from Wiha is the smart helper for service engineers and for DIY use.



The 180° stop limit when working on applications with higher safety requirements puts an end to trapped fingers.



Wiha Mini PocketStar.

- All small keys are held together in the Mini PocketStar. Not a single blade is lost
- Each of the 8 blades can be used as screwdriver when set at 180° and as tool with lever arm when set at 90°
- The glass-fibre-reinforced polyamide holder ensures that the Mini PocketStar withstands every stress unscathed
- Of course, the smallest PocketStar also has the same special functions as the "big" PocketStars

Mixed sets.



SB 351 PM8X Hex fold out holder Mini PocketStar.
With additional blades, 8 pcs.
Blister packed.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 55 mm long.
Application: Practical fold out holder for mini keys so they no longer get lost. Particularly suitable for use with the smallest screws, e.g. when tightening screws or for the accurate setting of sensors.
Extra: Robust casing with eject button for simple and easy key selection. Hanging loop with matching snap-hook.

Order-No.						
27936	SB 351 PM8X					5
⊙	0.7	0.9	1.3	1.5	2.0	
⊕	1.5	2.0				
⊕	PH00					

Mixed sets.



SB 363 PM8X TORX® fold out holder Mini PocketStar.
With additional blades, 8 pcs.
Blister packed.

Blade: Chrome-vanadium steel, through hardened, electro-plated.
Handle: Ergonomic, reinforced fibreglass housing, 55 mm long.
Application: Practical fold out holder for mini keys so they no longer get lost. Particularly suitable for use with the smallest screws, e.g. when tightening screws or for the accurate setting of sensors.
Extra: Robust casing with eject button for simple and easy key selection. Hanging loop with matching snap-hook.

Order-No.					
27939	SB 363 PM8X				5
⊕	T4	T5	T6	T7	
⊕	1.5	2.0			
⊕	PH00				
⊙	2.0				





Wiha ComfortGrip T-handle.

Soft zones for maximum working comfort.



Side blade
with through blade.

The new Wiha T-handle with through blade for additional side blade features soft zones for the comfortable transmission of high torques.

Due to their ergonomic design, these handles are comfortable to hold. Fewer pressure points and less strain on the user mean that these tools are a pleasure to use.

When using the side blade, a supporting hand on the handle produces additional stability, which prevents the blade from suddenly slipping out of the screw head. This is better for both blade and screw.

The hole in the handle can be used for shop storage.




No screw can resist. The powerful Wiha ComfortGrip is quick and comfortable to use and even loosens screws that have been glued into position.



A tool that is a pleasure to use. Using the side blade for even greater torque, a supporting hand stabilises the handle and prevents the blade from slipping.



Black soft zones in the handle for comfortable working.



Chrome-plated blade for optimum corrosion protection.



Wiha ComfortGrip T-handle.


- The integrated side blade is particularly useful when loosening or tightening screws that are rusted-in, glued into position or particularly hard to move
- The through blade withstands even the highest stresses
- Distinctive soft zones on the ergonomic handle for the comfortable transmission of even high torques
- Handle-size concept with three handle shapes designed for maximum ease of use and for applying just the right amount of torque
- The new colour-coding system for the handles couldn't be clearer:
Red: metric hex blades
Green: TORX® profiles
- Matt chrome-plated blades guarantee optimum corrosion protection and a long service life for the whole blade



Wiha ComfortGrip T-handle.

Soft zones for maximum working comfort.

For Allen screws (metric).

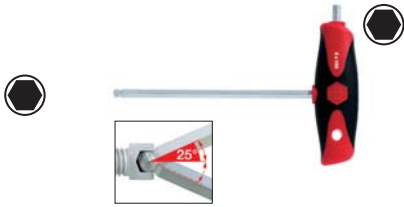

540DS Hexagon ball end screwdriver with ComfortGrip. With side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For comfortable high torque transfer. Especially useful for loosening or tightening screws that are hard to move. Specially for hard-to-reach screws.
 Extra: One piece blade, through the handle withstands even the highest stresses. The ball end enables the user to work at angles up to 25°.

Order-No.	●	≡	≡	≡	≡	≡
28372	3	150	13	80	26	10
28373	4	150	13	80	26	10
28374	5	150	17	100	32	10
28375	6	150	17	100	32	10
28376	8	200	17	100	32	10
28377	10	200	22	120	38	10


For Allen screws (metric).



334DS Hex driver with ComfortGrip. With side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For comfortable high torque transfer. Especially useful for loosening or tightening screws that are hard to move.
 Extra: One piece blade, through the handle withstands even the highest stresses.

Order-No.	●	≡	≡	≡	≡	≡
26164	2	100	13	80	26	10
26165	2.5	100	13	80	26	10
26166	3	100	13	80	26	10
26167	4	150	13	80	26	10
26168	5	150	17	100	32	10
26169	6	150	17	100	32	10
26170	8	200	17	100	32	10
26171	10	200	22	120	38	10

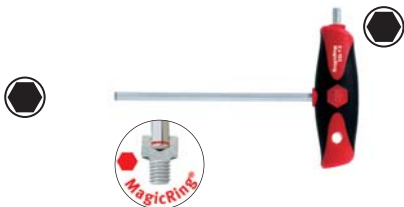

334DSR Hex driver with ComfortGrip. With MagicRing® and side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For comfortable high torque transfer and to insert and remove screws from holes. Especially useful for loosening or tightening screws that are hard to move.
 Extra: MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position. One piece blade, through the handle withstands even the highest stresses.

Order-No.	●	≡	≡	≡	≡	≡
26135	3	100	13	80	26	10
26136	4	150	13	80	26	10
26137	5	150	17	100	32	10
26138	6	150	17	100	32	10
26139	8	200	17	100	32	10
26140	10	200	22	120	38	10



334D Hex driver with ComfortGrip.

Blade: Chrome vanadium steel, through-hardened, nickel-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For high torque transfer with minimal effort.

Order-No.	●	≡	≡	≡	≡	≡
34664	2	100	126	80	26	10
34665	2.5	100	126	80	26	10
34666	3	100	126	80	26	10
34667	3	150	176	80	26	10
34668	4	100	126	80	26	10
34669	4	150	176	80	26	10
34670	5	100	132	100	32	10
34671	5	150	182	100	32	10
34672	5	200	232	100	32	10
34673	6	100	132	100	32	10
34674	6	150	182	100	32	10
34675	6	200	232	100	32	10
34676	8	150	182	100	32	10
34677	8	200	232	100	32	10
34678	10	200	238	120	38	10

For TORX® screws.



364DS TORX® driver with ComfortGrip. With side blade.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For comfortable high torque transfer. Especially useful for loosening or tightening screws that are hard to move.
 Extra: One piece blade, through the handle withstands even the highest stresses. ChromTop® blade tip for the highest accuracy at both ends.

Order-No.	⊕	↔	↔	↔	↔	↔
26172	T10	100	13	80	26	10
26173	T15	100	13	80	26	10
26174	T20	100	17	100	32	10
26175	T25	150	17	100	32	10
26176	T27	150	17	100	32	10
26177	T30	150	17	100	32	10
26178	T40	150	17	100	32	10



364D TORX® driver with ComfortGrip.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For high torque transfer with minimal effort.
 Extra: ChromTop® blade tip for the highest accuracy.

Order-No.	⊕	↔	↔	↔	↔	↔
34679	T10	100	126	80	26	10
34680	T15	100	126	80	26	10
34681	T20	100	132	100	32	10
34682	T25	100	132	100	32	10
34683	T27	100	132	100	32	10
34684	T30	100	132	100	32	10
34685	T40	100	132	100	32	10

Sets.



334DS K6 Hex driver set with ComfortGrip, 6 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For comfortable high torque transfer and to insert and remove screws from holes. Especially useful for loosening or tightening screws that are hard to move.
 Extra: One piece blade, through the handle withstands even the highest stresses. ChromTop® blade tip for the highest accuracy at both ends. 6 common sizes in set packaging.

Order-No.	↔	↔	↔	↔	↔
26247	334DS K6				1
⊕	334DS	2.5	3	4	5
		6	8		



364DS K6 TORX® driver set with ComfortGrip.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha ComfortGrip, the comfortable multi-component T-handle with soft zones for maximum working comfort.
 Application: For comfortable high torque transfer. Especially useful for loosening or tightening screws that are hard to move.
 Extra: One piece blade, through the handle withstands even the highest stresses. ChromTop® blade tip for the highest accuracy at both ends. 6 common sizes in set packaging.

Order-No.	↔	↔	↔	↔	↔
26248	364DS K6				1
⊕	364DS	T10	T15	T20	T25
		T30	T40		



Wiha Classic T-handle.

The classic for high torques.




The handle design is such that the complete handle surface can be used, thus enabling optimum power transmission.

The ergonomic design of the Wiha T-handle that fits comfortably into the hand ensures optimum, symmetrical torque transmission from the hand through the blade to the screw. The extruded, angled end of the blade ensures that, even at the highest torques, the blade does not slip but gains a secure hold when either tightening or loosening the screw. As the blades are subjected to high stresses, Wiha uses exclusively high-quality chrome-vanadium steels that are first subjected to a complex hardening procedure before being used in the wear-resistant blades.



A wide range of hex (metric and inch sizes), TORX® and TORX PLUS® blades, as well as hex drivers (metric and inch), ensures that the perfect tool is at hand for all conceivable applications. A colour-coding system for the handles facilitates the selection of the right blade.

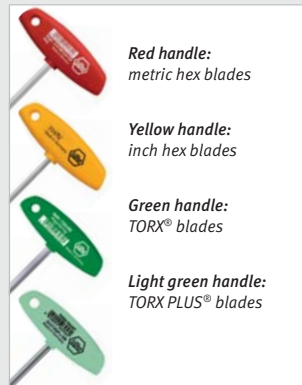

Red handle:
metric hex blades

Yellow handle:
inch hex blades

Green handle:
TORX® blades

Light green handle:
TORX PLUS® blades

Thanks to the clear colour-coding system, you're sure to select the appropriate blade.



Wiha Classic T-handle.

- High torque transmission thanks to ergonomic handle
- Through hardened blades made of chrome-vanadium steel withstand every stress
- The angled blade end is injection-moulded into the T-handle and non detachable
- Hanging hole for workshop storage
- Made of high-quality plastic



For Allen screws (metric).



334R Hex driver with T-handle.
With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position.

Order-No.	●	↔	↔	↔	↔	↔
22168	3	100	126	80	26	10
22170	4	150	176	80	26	10
22172	5	150	182	100	32	10
22174	6	150	182	100	32	10
21960	8	200	232	100	32	10
21962	10	200	238	120	38	10

For Allen screws (metric).



540 Ball end hex driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort, especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	●	↔	↔	↔	↔	↔
04111	4	150	176	80	26	10
04108	5	150	182	100	32	10
04105	6	150	182	100	32	10
04099	8	200	238	100	32	10
04096	10	200	238	120	38	10



334R VB Hex driver set with T-handle.
With MagicRing®, in bench stand, 6 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: MagicRing® made from spring steel holds all standard screws in every position.
Robust metal workbench holder to place on workbench or wall-mount.
Tip diagrams printed to scale.

Order-No.	Series	↔
22096	334R VB	1
●	334R	3x100 4x150 5x150 6x150 8x200 10x200

Wiha Info



Wiha MagicRing:
spring steel ring
reliably holds hex screws
in place.

Wiha Classic T-handle.

The classic for high torques.

For Allen screws (metric).



334 Hex driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.

Order-No.	Hex	Blade Length	Blade Dia	Blade Thick	Blade Thick	Blade Thick	Blade Thick
00904	2	100	-	126	80	26	10
00905	2	200	-	226	80	26	10
00906	2.5	100	-	126	80	26	10
00907	2.5	200	-	226	80	26	10
00908	3	100	-	126	80	26	10
00909	3	150	-	176	80	26	10
00910	3	200	-	226	80	26	10
00911	3	350	5+	382	100	32	10
00912	4	100	-	126	80	26	10
00913	4	150	-	176	80	26	10
00914	4	200	-	226	80	26	10
00915	4	350	5+	382	100	32	10
00916	5	100	-	132	100	32	10
00917	5	150	-	182	100	32	10
00918	5	200	-	232	100	32	10
00919	5	350	-	382	100	32	10
00921	6	100	-	132	100	32	10
00922	6	150	-	182	100	32	10
00923	6	200	-	232	100	32	10
00924	6	350	-	382	100	32	10
00926	7	200	-	232	100	32	10
00928	8	100	-	132	100	32	10
00929	8	150	-	182	100	32	10
00930	8	200	-	232	100	32	10
00931	8	350	-	372	100	32	10
00933	10	100	-	138	120	38	10
00934	10	200	-	238	120	38	10
00937	12	200	-	238	120	38	5

+ Overlength with reinforced blade.

For hex nuts.



336 Hex nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: Recess in shank to accommodate for long screws.

Order-No.	Hex	Blade Length	Blade Dia	Blade Thick	Blade Thick	Blade Thick	Blade Thick
00965	5.5	125	157	100	32		10
00966	6	125	157	100	32		10
00967	6	200	232	100	32		10
00968	7	125	157	100	32		10
00969	7	200	232	100	32		10
00970	7	350	382	100	32		10
00971	8	125	157	100	32		10
00972	8	200	232	100	32		10
00973	8	350	382	100	32		10
00974	9	125	157	100	32		10
00975	9	200	232	100	32		10
00977	10	125	157	100	32		10
00978	10	200	232	100	32		10
00979	10	230	262	100	32		10
00980	10	350	382	100	32		10
00982	11	125	157	100	32		10
00983	11	230	262	100	32		5
00985	12	125	157	100	32		10
00986	12	230	262	100	32		5
00988	13	125	157	100	32		10
00989	13	230	262	100	32		10
00990	13	350	382	100	32		10
00991	14	125	157	100	32		5
00993	15	125	157	100	32		5
00994	16	125	157	100	32		5
00995	17	125	157	100	32		5



334 VB Hex driver set with T-handle. In bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: Robust metal workbench holder to place on workbench or wall-mount.
 Tip diagrams printed to scale.

Order-No.	Series	Blade Length	Blade Dia	Blade Thick	Blade Thick	Blade Thick	Blade Thick
00953	334 VB						1
●	334	2x100	2.5x100	3x100	4x150		
●		5x150	6x200	8x200			



338 Square nut driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: Recess in shank to accommodate for long screws.

Order-No.	Hex	Blade Length	Blade Dia	Blade Thick	Blade Thick	Blade Thick	Blade Thick
01005	6	125	157	100	32		10
01006	8	125	157	100	32		10
01007	10	125	157	100	32		10
01008	12	125	157	100	32		10

For hexagon bolts and Allen screws (metric).



334 Zoll Hex driver with T-handle.
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.

Order-No.	●	↔	↔	↔	↔	mm	▬
02802	3/32	150	182	80	26	2.38	10
02803	7/64	150	182	80	26	2.78	10
02804	1/8	150	182	80	26	3.18	10
02805	9/64	150	182	80	26	3.57	10
02806	5/32	150	182	80	26	3.97	10
02807	3/16	150	182	100	32	4.76	10
02808	7/32	150	182	100	32	5.56	10
02809	1/4	150	182	100	32	6.35	10
02810	5/16	150	182	100	32	7.94	10
02811	3/8	150	188	120	38	9.53	10



336 Zoll Hex nut driver with T-handle.
Inch sizes.

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
Handle: Wiha Classic T-handle.
Application: For high torque transfer with minimal effort.
Extra: Recess in shank to accommodate for long screws.

Order-No.	○	↔	↔	↔	↔	mm	▬
02819	3/16	150	182	100	32	4.76	10
02820	1/4	150	182	100	32	6.35	10
02821	5/16	150	182	100	32	7.94	10
02822	3/8	150	182	100	32	9.53	10
02823	7/16	150	182	100	32	11.11	10
02824	1/2	150	182	100	32	12.70	10

For hex nuts and hex socket screws.



1000 V
IEC 60900:2004

334N VDE T-handle hex screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.
Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: VDE-insulated T-handle.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For allen screws.

Order-No.	●	↔	↔	↔	↔	mm	▬
27928	4	150	176	80	26		5
27929	5	150	182	100	32		5
27930	6	150	182	100	32		5
27931	8	150	182	100	32		5



1000 V
IEC 60900:2004

336N VDE T-handle hex nut driver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.
Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Deep drawn socket.
Handle: VDE-insulated T-handle.
Standards: Manufactured acc. to IEC 60900:2004.
Application: For external hex screws and hex nuts.

Order-No.	○	↔	↔	↔	↔	mm	▬
27932	8	200	232	100	32		5
27933	10	230	262	100	32		5
27934	13	230	262	100	32		5
27935	17	230	268	120	38		5

Wiha Info

Colour-coding system:

- red:
metric hex blades
- yellow:
inch hex blades
- green:
TORX® blades
- light green:
TORX PLUS® blades

Wiha Classic T-handle.

The classic for high torques.

For TORX® screws.



364 TORX® driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: ChromTop® blade tip for the highest accuracy.

Order-No.	⊕	🔧	●	🔧	🔧	🔧	🔧
01328	T9	100	4.0	126	80	26	10
01329	T10	100	4.0	126	80	26	10
01330	T15	100	4.0	126	80	26	10
01331	T15	200	5.5	226	80	26	10
01332	T20	100	4.0	132	100	32	10
01333	T20	200	5.5	232	100	32	10
01334	T25	100	4.5	132	100	32	10
01335	T25	200	5.5	232	100	32	10
01336	T27	100	5.5	132	100	32	10
01337	T27	200	5.5	232	100	32	10
01338	T30	100	6.0	132	100	32	10
01339	T30	200	6.0	232	100	32	10
01340	T40	100	7.0	132	100	32	10
01341	T40	200	7.0	232	100	32	10
01343	T45	250	8.0	288	120	38	10
01345	T50	250	9.0	288	120	38	10

For TORX® and TORX PLUS® screws.



364R TORX® driver with T-handle. With MagicSpring®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: MagicSpring® made of stainless steel holds TORX® screws tight at various angles.
 ChromTop® blade tip for the highest accuracy
 Blade made of hexagonal material is particularly capable of withstanding stress.

Order-No.	⊕	🔧	●	🔧	🔧	🔧	🔧
27964	T9	100	4.0	126	80	26	10
27965	T10	100	4.0	126	80	26	10
27966	T15	100	4.0	126	80	26	10
27967	T20	100	4.0	132	100	32	10
27968	T25	100	5.0	132	100	32	10
27969	T27	100	6.0	132	100	32	10
27970	T30	100	6.0	132	100	32	10
27971	T40	100	8.0	132	100	32	10



364 VB TORX® driver set with T-handle. In bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: ChromTop® blade tip for the highest accuracy.
 Robust metal workbench holder to place on workbench or wall-mount.
 Tip diagrams printed to scale.

Order-No.	Series	🔧				
01348	364 VB	1				
⊕	364	T10x100	T15x100	T20x100	T25x100	
		T30x100	T40x200	T50x250		



364IP TORX PLUS® driver with T-handle.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Handle: Wiha Classic T-handle.
 Application: For high torque transfer with minimal effort.
 Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
 ChromTop® blade tip for the highest accuracy.
Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	⊕	🔧	●	🔧	🔧	🔧	🔧
26953	9IP	100	4.0	126	80	26	10
26954	10IP	100	4.0	126	80	26	10
26955	15IP	100	4.0	126	80	26	10
26956	20IP	100	4.0	132	100	32	10
26957	25IP	150	4.5	182	100	32	10
26958	27IP	150	5.5	182	100	32	10
26959	30IP	150	6.0	182	100	32	10
26960	40IP	150	7.0	182	100	32	10



Wiha flag and key handle.

The knack of applying just the right amount of pressure.



Innovative torsion blade in sizes T5 to T10 does not damage the expensive fastening screws or the tool profile.

Screwdrivers with flag or key handles are used whenever replacing indexable inserts on milling heads. Thanks to the large support area for thumb and index finger, it is possible to loosen or tighten any screw with comfort by applying just the right amount of pressure. These tools are also particularly suitable for high-torque adjustment work.



The small, 7-piece bench stand ensures a tidy working environment.



The flag and key handles have large support surfaces for thumb and index finger for ease of use and efficiency.



Wiha flag and key handle.

- Large support areas for thumb and index finger on the ergonomically shaped handles. The transmission of high torques is thus quite simple
- Cylindrical handle shaft for quick turning of screws
- Innovative torsion blade for T5 to T10 greatly reduces the risk of breakage. Thus, broken profiles in the screw head are largely avoided. If more torque than required is applied, the blade responds elastically (cf. picture)
- Thanks to thin blades, even covered screws in the screw axis can be turned



Wiha key handle.

For Allen screws and TORX® screws.



331 Hex driver with key handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha key handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.

Order-No.	●	←	→	←	→
00894	1.5	60	95	40	10
00895	2	60	95	40	10
00896	2.5	60	95	40	10
00897	3	60	95	40	10



365 TORX® driver with key handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha key handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.

Order-No.	●	←	●	→	←	→
04918	T5	35	2.0	70	40	10
01350	T6	35	2.0	70	40	10
01351	T7	35	2.5	70	40	10
01352	T8	40	2.5	75	40	10
01353	T9	40	3.0	75	40	10
01354	T10	40	3.0	75	40	10
01355	T15	45	3.5	80	40	10
01356	T20	45	4.0	80	40	10



365 VB TORX® screwdriver set with key handle. In small bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha key handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
 Extra: Small, robust metal workbench holder to stand on workbench. Tip diagrams printed to scale.

Order-No.	Series				
25624	365 VB	1			
●	365	T6x35	T7x35	T8x40	T9x40
		T10x40	T15x45	T20x45	

For TORX PLUS® screws.



365IP TORX PLUS® driver with key handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha key handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
 Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
 Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	●	←	●	→	←	→
26181	5IP	35	2.0	70	40	10
26182	6IP	35	2.0	70	40	10
26183	7IP	35	2.5	70	40	10
26184	8IP	40	2.5	75	40	10
26185	9IP	40	3.0	75	40	10
26186	10IP	40	3.0	75	40	10
26187	15IP	45	3.5	80	40	10
26188	20IP	45	4.0	80	40	10



365IP VB TORX PLUS® driver set with key handle. In small bench stand, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha key handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
 Extra: Small, robust metal workbench holder to stand on workbench. Tip diagrams printed to scale.

Order-No.	Series				
26261	365IP VB	1			
●	365IP	6IPx35	7IPx35	8IPx40	9IPx40
		10IPx40	15IPx45	20IPx45	

Wiha Info

Colour-coding system:

- **red:**
metric hex blades
- **yellow:**
inch hex blades
- **green:**
TORX® blades
- **light green:**
TORX PLUS® blades

Wiha flag handle and offset screwdriver.

For TORX® and TORX PLUS® screws.



370 TORX® driver with flag handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha flag handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.

Order-No.	⊕	↔	●	↔	↔	↔
03724	T5	35	2.0	62	15	10
03725	T6	35	2.0	62	15	10
03726	T7	35	2.5	67	19	10
03727	T8	40	2.5	72	19	10
03728	T9	40	3.0	74	24	10
03729	T10	40	3.0	74	24	10
03730	T15	45	3.5	80	28	10
03731	T20	45	4.0	80	28	10



370 VB TORX® driver set with flag handle. In small bench stand, 7 pcs.

Order-No.	Series	↔
25625	370 VB	1
⊕	370	T6x35 T7x35 T8x40 T9x40 T10x40 T15x45 T20x45



370IP TORX PLUS® driver with flag handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Handle: Wiha flag handle.
 Application: For high torque transfer with small screws, especially when replacing indexable inserts on milling heads.
 Extra: The stronger profile of the TORX PLUS® tip allows up to 25% extra torque than the TORX® profile.
 Attention: TORX PLUS® keys cannot be used with TORX® screws.

Order-No.	⊕	↔	●	↔	↔	↔
27614	5IP	35	2.0	67	15	10
27615	6IP	35	2.0	67	15	10
27616	7IP	35	2.5	67	19	10
27617	8IP	40	2.5	72	19	10
27618	9IP	40	3.0	74	24	10
27619	10IP	40	3.0	74	24	10
27620	15IP	45	3.5	80	28	10
27621	20IP	45	4.0	80	28	10

For slotted, Phillips and Pozidriv screws.



207 Slotted offset screwdriver with handle.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: DIN 5200.
 Application: For working in confined spaces.

Order-No.	⊕	⊖	↔	↔	●	↔
00373	3.5	0.6	90	8.5	3.5	10
00374	4.0	0.8	100	9.0	4.0	10
00375	5.5	1.0	125	10.5	5.5	10
00376	6.5*	1.2	125	13.5	6.5	10
00377	8.0	1.2	150	17.0	8.0	10
00378	10.0	1.6	175	24.0	9.0	10
00379	12.0	2.0	200	27.0	10.0	5

* Additional dimension. Non-DIN size.



161 Phillips offset screwdriver with handle.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
 Standards: DIN 5208.
 Application: For working in confined spaces.

Order-No.	⊕	⊖	↔	↔	●	↔
00144	PH1	PH2	125	14.5	5.5	10
00145	PH2	PH3	150	21.0	8.0	10
00146	PH3	PH4	200	25.0	10.0	10



224 Pozidriv offset screwdriver with handle.

Blade: Chrome-vanadium steel, through hardened, black-finish.
 Standards: DIN 5208.
 Application: For working in confined spaces.

Order-No.	⊕	⊖	↔	↔	●	↔
00432	PZ1	PZ2	125	14.5	5.5	10
00433	PZ2	PZ3	150	21.0	8.0	10
00434	PZ3	PZ4	200	25.0	10.0	10