

# 3M knows efficiency is key. For you, your team, and your bottom line.

From ultra-strong adhesives that hold parts together, to futuristic materials that reduce cost and save time. Our innovative solutions keep your business and your employees working smoothly.








Easy to identify. Easy to buy. Easy to use.

# Easy to grasp packaging:

Color coding to quickly identify products



Multilingual, individually labeled

Customer preferred content Easier for breaking cases Great for vending machines and counters sales

**UPC** codes

For better inventory tracking and vending machine sales



















Industrial solutions. MRO essentials.	
English Cuideo	Jump to page 2-11
Facility Guides	12-17
Facility Solutions Checklist	18
racility Solutions Greckist	10
Adhesives	
Aerosol Adhesives	19-21
Cleaners and Lubricants	22
Hot Melt Adhesives	23
Anaerobic Adhesives	24-25
Instant Adhesives	<u>25</u>
Solvent and Water Based Adhesives	26
Contact Adhesives	<u>26</u>
Concrete Repair	<u>26</u>
3M <sup>™</sup> Scotch-Weld <sup>™</sup> Structural Adhesives	27-29
Adhesive Sealants	30-31
Fire Protection Products	
Fire Barrier Sealants	32-33
Through-Penetration Products	33-37
Fire Barrier Tapes	37
Flexible Wraps	38-39
Construction Joint Spray	39
Packaging Solutions	
Box Sealing Tapes and Dispensers	40-46
High Strength Packaging Tapes	47-49
Light Duty Packaging Tapes	50-51
Packing List Envelopes	52-53
Tape Sheets	53
Scotch® Pouch Tapes	54
Label Protection Tapes	55
Carry Handles	56
Hang Tabs	56
Tape Solutions	57.60
Masking Tapes  Duct and Cloth Tape	<u>57-60</u> 61-63
Foil, HVAC, Venture Tape™ and Seaming Tapes	64-65
Marking and Safety Tapes	66-67
	68-69
Foam Tapes	70-71
Repositionable Tapes	71 71
Adhesive Transfer Tapes	71- 72-73
Scotch® ATG Tapes	72
Double Coated Tapes	74
20000 00000 10000	<u> </u>
Reclosable Fasteners	
3M <sup>™</sup> Dual Lock <sup>™</sup> Reclosable Fasteners	<u>75-76</u>
3M™ Hook and Loop	<u>77-78                                  </u>
Index	79-83



# Distribution Facility Guide – Index

Applications	Product	Page
Lobby and Common Areas		
Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Assemble and mount point of purchase and display cases	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Permanently mount plastic hooks and racks	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Install kick plates	3M™ Double Coated Urethane Foam Tape 4026W	68
Restrooms		
Permanently attach soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	<u>68</u>
Remove gunk and grime	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22
Cafeteria/Break Room		
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Attach soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68
Remove gunk and grime	3M™ Citrus Base Cleaner and 3M™ Adhesive Remover	22
Conveyors and Belts		
Duct tapes	3M <sup>™</sup> Performance Plus Duct Tape 8979	62
Cleaners and lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone 3M <sup>™</sup> Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	<u>22</u>
Specialty tapes	3M <sup>™</sup> PTFE Film Tape 5490 and 3M <sup>™</sup> UHMW Film Tape 5423	71
Safety Room		
Office and Meeting Rooms		
Label protection	Scotch® Label Protection Tape 821	55
Labeling	3M™ Masking Tape 201+	57
General repairs	3M™ Low VOC Aerosols	19-2
Cleaners for grime and glue	3M™ Citrus Base Cleaner	22
Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Box sealing tapes	Scotch® Box Sealing Tape 371 and Dispensers	41, 4
Security tapes	Scotch® Security Message Box Sealing Tapes	<u>45</u>
Packing list envelopes	3M <sup>™</sup> Packing List Envelopes	52-5
Filament tapes	3M™ Filament Tapes	4 <u>7-4</u>
Facility Grounds/Outdoor		
Concrete repair	3M™ Concrete Repair 600	<u>26</u>
Concrete sealing	3M™ Polyurethane Construction Sealant 525	30
Quick repairs	3M™ Performance Plus 8979	62
Permanently attach signs	3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tane 5952	69
•	WOULDING TABLE 2007	

Mounting Tape 5952

3M<sup>™</sup> Performance Plus 8979

3M<sup>™</sup> Adhesive Sealant 740 UV

3M<sup>™</sup> Dual Lock<sup>™</sup> Reclosable Fasteners

3M<sup>™</sup> Marking and Safety Tapes 471 &

5702, 3M™ Lane Marking Applicator M-1, 66-67 3M™ Ultra Durable Floor Marking Tape 971

Applications	Product	Page
Loading Dock/Shipping a	and Receiving	
Label protection	Scotch® Label Protection Tape 821	55
Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7
Concrete repair	3M™ Concrete Repair 600	26
Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	30
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B and 3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tapes 5952	6 <u>8-6</u> 9
Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	41, 46
Filament tapes and dispensers	3M <sup>™</sup> Filament/Strapping Tapes and Dispensers	4 <u>7-4</u> 9

9	Heating/Air and Power Go	eneration	
	Maintain electrical components	3M <sup>™</sup> Silicone Spray and 5-Way Penetrant	22
	Mark or label	3M <sup>™</sup> Masking Tapes 201+	<u>57</u>
	Attach signage	3M <sup>™</sup> Foam Tapes	6 <u>8-6</u> 9
	Duct tapes	3M™ Duct Tapes	6 <u>1-6</u> 3

10	Production Floor/ Tool Cri	b/ Warehouse	
	Mark or label	3M <sup>™</sup> Masking Tapes 201+	57
	Attach signage	3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	69
	Duct tapes	3M™ Duct Tapes	6 <u>1-6</u> 3
	Lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
	Cleaners	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22
	Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
	Concrete repair	3M™ Concrete Repair 600	26
	Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	30
	Anaerobic adhesives	3M™ Scotch-Weld Threadlockers	24-25

Maintenance Closet		
Aerosols adhesives	3M <sup>™</sup> Super 77 <sup>™</sup> Multipurpose Spray Adhesive	<u>19</u>
Cleaners and lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
Duct tapes	3M™ Duct Tapes	6 <u>1-6</u> 3
Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	5 <u>7-5</u> 8
Attach signage	3M <sup>™</sup> Double Coated Foam Tape 4496B	68

12	Maintenance Shop		
	Duct tapes	3M <sup>™</sup> Duct Tapes	6 <u>1-6</u> 3
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	5 <u>7-5</u> 8
	Aerosols adhesives	3M <sup>™</sup> Spray Adhesives	1 <u>9-2</u> 1
	Cleaners and lubricants	$3M^{^{\top}\!\!M}$ Silicone Lubricant, $3M^{^{\top}\!\!M}$ Silicone Spray - Low VOC 60% and $3M^{^{\top}\!\!M}$ 5-Way Penetrant	22
	Attach signage	3M <sup>™</sup> Foam Tapes	6 <u>8-6</u> 9
	Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7



62

7<u>5-7</u>6

30





Mark lanes, hazards and

Protect pipes

Access panels

Exterior sealing

safety areas

# **Distribution Facility Guide**

There are many places throughout your facility where 3M Maintenance and Repair Product solutions can help you run an efficient operation.









# Education Facility Guide – Index

Applications	Product	Page
Lockers and Common Area		
Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Assemble and mount point of purchase and display cases	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Permanently mount plastic hooks and racks	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Install kick plates	3M™ Double Coated Urethane Foam Tape 4026W	68
Restrooms and Wash Area		
Permanently attach soap	3M <sup>™</sup> Double Coated Urethane Foam	
and hand sanitizing dispensers	Tape 4026W	68
Remove gunk and grime	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22
Cafeteria/Break Room		
Permanently attach signs,	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Attach soap and hand	3M <sup>™</sup> Double Coated Urethane Foam	68
sanitizing dispensers	Tape 4026W	30
Remove gunk and grime	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22
Classrooms and Meeting Area		
-		
I ah ayatam.		
Laboratory		
Label beakers and equipment	3M <sup>™</sup> Masking Tapes 101+ and 201+	<u>57</u>
Safety Room		
Health Care Station		
Facility Grounds/Outdoor		
Concrete repair	3M <sup>™</sup> Concrete Repair 600	26
Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	30
Quick repairs	3M <sup>™</sup> Performance Plus 8979	62
Permanently attach signs	3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	69
Mark lanes, hazards and safety areas	3M™ Marking and Safety Tapes 471 & 5702, 3M™ Lane Marking Applicator M-1, 3M™ Ultra Durable Floor Marking Tape 971	66-6
Gymnasium and Field House		
Mark lanes, hazards and safety areas	3M™ Marking and Safety Tapes 471 & 5702, 3M™ Lane Marking Applicator M-1, 3M™ Ultra Durable Floor Marking Tape 971	66-6
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B and 3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	6 <u>8-6</u>

	Applications	Product	Page
10	Locker Rooms		
	Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
	Anaerobic adhesives	3M <sup>™</sup> Scotch-Weld <sup>™</sup> Threadlockers	24-25
	Sealants	3M <sup>™</sup> Adhesive Sealants	30-31

_			
11	Janitorial Closet		
	Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
	Aerosols adhesives	3M <sup>™</sup> Spray Adhesives	1 <u>9-2</u> 1
	Cleaners and Lubricants	3M <sup>™</sup> 5-Way Penetrant, 3M <sup>™</sup> Silicone Lubricant	22
	Duct tapes	3M <sup>™</sup> Duct Tape	<u>61-63</u>
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ – 401+	<u>57-5</u> 8
	Foam tapes	3M <sup>™</sup> Foam Tapes	68-69

_			
12	Heating/Air and Power Go	eneration	
	Maintain electrical components	3M <sup>™</sup> Silicone Spray and 5-Way Penetrant	22
	Mark or label	3M <sup>™</sup> Masking Tapes 201+	57
	Attach signage	3M <sup>™</sup> Foam Tapes	68-70
	Duct tapes	3M <sup>™</sup> Duct Tapes	61-63

13	Repair Shop		
	Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
	Duct Tapes	3M <sup>™</sup> Duct Tape	<u>61-63</u>
	Masking Tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	<u>57-5</u> 8
	Lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
	Aerosol Adhesives	3M <sup>™</sup> Spray Adhesives	19-21
	Cleaners	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22

Loading Dock/Shipping a	and Receiving	
Attach signage (indoor)	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B and 3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tapes 5952	6 <u>8-6</u> 9
Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	41, 46
Label protection	Scotch® Film Tape 821	55
Filament tapes and dispensers	3M <sup>™</sup> Filament/Strapping Tapes and Dispensers	<u>47-4</u> 9
Concrete repair	3M <sup>™</sup> Concrete Repair 600	26
Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	30
Duct tapes	3M <sup>™</sup> Duct Tapes	6 <u>1-6</u> 3
Masking tanes	3M <sup>™</sup> Masking Tapes 101+ - 401+	57-58



22

3M<sup>™</sup> Citrus Base Cleaner and

3M<sup>™</sup> Adhesive Remover





Remove gunk and grime

# **Education Facility Guide**

There are many places throughout your facility where 3M Maintenance and Repair Product solutions solve everyday challenges.









# Food Processing Facility Guide – Index

Applications	Product	Page
Lobby and Common Areas		
Permanently attach signs, plaques awards, nameplates	<sup>S</sup> ,3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Assemble and mount point of purchase and display cases	3M <sup>™</sup> Double Coated Foam Tape 4496B	68_
Permanently mount plastic hooks and racks	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
Install kick plates	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68
Restrooms		
Permanently attach soap and han sanitizing dispensers	d3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68
Remove gunk and grime	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22
Cafeteria/Break Room		
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B	<u>68</u>
Attach soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	<u>68</u>
Remove gunk and grime	3M™ Citrus Base Cleaner and 3M™Adhesive Remover	22
Food Processing Area		
Aerosols and low VOC aerosols	3M <sup>™</sup> Spray Adhesives	19-22
Cleaners and Lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
R&D/Quality Control		
Label beakers and equipment	3M <sup>™</sup> Masking Tapes 101+ and 201+	<u>57</u>
Safety Supplies Room		
Facility Grounds/Outdoor		
Concrete repair	3M <sup>™</sup> Concrete Repair 600	26
Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	30_
Quick repairs	3M <sup>™</sup> Performance Plus Duct Tape 8979	62
Permanently attach signs	3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	<u>69</u>

Q	Landina	Da ala	/Ch!!		Receiving
l O	Loading	Dock	/Shippina	and	Receiving

Protect pipes

Access panels

Exterior sealing

Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7
Concrete repair	3M™ Concrete Repair 600	<u>26</u>
Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	<u>30</u>
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B and 3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	68-69
Label protection	Scotch® Label Protection Tape 821	55
Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	41 <u>, 4</u> 6
Filament tapes and dispensers	3M™ Filament/Strapping Tapes and Dispensers	47-49
Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	57 <u>-58</u>
Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B and 3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tapes 5952	68-69

3M<sup>™</sup> Performance Plus Duct Tape 8979

 $3M^{{}^{\scriptscriptstyle\mathsf{TM}}} \, \mathsf{Dual} \, \, \mathsf{Lock}^{{}^{\scriptscriptstyle\mathsf{TM}}} \, \mathsf{Reclosable} \, \, \mathsf{Fasteners}$ 

3M<sup>™</sup> Adhesive Sealant 740 UV

Applications	Product	Page
Office and Meeting Rooms		
Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	4 <u>1, 4</u> 6
Security tapes	Scotch® Security Message Box Sealing Tapes	45
Packing list envelopes	3M <sup>™</sup> Packing List Envelopes	5 <u>2-5</u> 3
Filament tapes	3M™ Filament Tapes	4 <u>7-4</u> 9
Label protection	Scotch® Label Protection Tape 821	55
Labeling	3M™ Masking Tape 201+	57
Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	57-58
Cleaners for grime and adhesives	3M™ Citrus Base Adhesive Remover	22
General repairs	3M <sup>™</sup> Low VOC Aerosols	1 <u>9-2</u> 0
Permanently attach signs, plaques, awards, nameplates	3M™ Double Coated Foam Tape 4496B	68

0	Stockroom		
	Mark lanes, hazards and safety areas	3M™ Marking and Safety Tapes 471 & 5702, 3M™ Lane Marking Applicator M-1, 3M™ Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7
	Duct tapes	3M™ Duct Tapes	61-63
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	5 <u>7-5</u> 8
	Aerosol adhesives	3M <sup>™</sup> Spray Adhesives	19-21
	Lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray- Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
	Cleaners	3M™ Citrus Base Cleaner and	22

Heating/Air and Power General	tion	
Maintain electrical components	3M <sup>™</sup> Silicone Spray and 5-Way Penetrant	22
Mark or label	3M <sup>™</sup> Masking Tapes 201+	.57
Attach signage	3M <sup>™</sup> Mounting Tapes	68-69
Mark lanes, hazards and safety areas	3M™ Marking and Safety Tapes 471 & 5702, 3M™ Lane Marking Applicator M-1, 3M™ Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7
Cleaners	3M™ Citrus Base Cleaner and 3M™Adhesive Remover	22

	and Sivi Adhesive hemover	
Maintenance Shop		
Duct tapes	3M™ Duct Tapes	6 <u>1-6</u> 3
Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	5 <u>7-5</u> 8
Aerosol adhesives	3M <sup>™</sup> Spray Adhesives	19-21
Cleaners and lubricants	3M <sup>™</sup> 5-Way Penetrant, 3M <sup>™</sup> Silicone Lubricant	22
Attach signage	3M <sup>™</sup> Foam Tapes	6 <u>8-6</u> 9
Lane marking products	3M™ Marking and Safety Tapes 471 & 5702, 3M™ Lane Marking Applicator M-1, 3M™ Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7



62

7<u>5-7</u>6

30



# **Food Processing Facility Guide**

There are many places throughout your facility where 3M Maintenance and Repair Product solve everyday challenges.









# **Healthcare Facility Guide – Index**

	Applications	Product	Page	
1	Lobby and Common Areas			9
	Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68	
	Assemble and mount point of purchase and display cases	3M <sup>™</sup> Double Coated Foam Tape 4496B	68	
	Permanently mount plastic hooks and racks	3M <sup>™</sup> Double Coated Foam Tape 4496B	68	
_	Install kick plates	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68	
2	Restrooms			
	Permanently attach soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68	
	Remove gunk and grime	3M <sup>™</sup> Citrus Base Cleaner and 3M <sup>™</sup> Adhesive Remover	22	
3	Cafeteria/Break Room			
	Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B	68	
	Attach soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68	<b>1</b>
	Remove gunk and grime	3M™ Citrus Base Cleaner and 3M™Adhesive Remover	22	W
4	Conference Room			
	Aerosol adhesives and cleaner	3M <sup>™</sup> Aerosols and Low VOC Aerosols	1 <u>9-2</u> 2	
5	Laboratory			
	Label beakers and equipment	3M <sup>™</sup> Masking Tape 101+ - 201+	57	
6	Safety Supplies Room			
7	Nurse's Station			

Facility Grounds/Outdoor		
Concrete repair	3M <sup>™</sup> Concrete Repair 600	26
Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	30
Quick repairs	3M <sup>™</sup> Performance Plus Duct Tape 8979	62
Permanently attach signs	3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	69
Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67

	Applications	Product	Page
9	Loading Dock/Shipping a	nd Receiving	
	Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	4 <u>1, 4</u> 6
	Label protection	Scotch® Label Protection Tape 821	55
	Filament tapes and dispensers	3M™ Filament/Strapping Tapes and Dispensers	4 <u>7-4</u> 9
	Mark lanes, hazards and safety areas	3M™ Marking and Safety Tapes 471 & 5702, 3M™ Lane Marking Applicator M-1, 3M™ Ultra Durable Floor Marking Tape 971	
	Concrete repair	3M™ Concrete Repair 600	26
	Concrete sealing	3M™ Polyurethane Construction Sealant 525	30
	Permanently attach signs	3M <sup>™</sup> Double Coated Foam Tape 4496B and 3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tapes 5952	68-69
	Duct tapes	3M™ Duct Tapes	61-63
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	57-58
	Attach signage	3M <sup>™</sup> Double Coated Foam Tape 4496B	68

_			
0	Office and Patient Rooms		
	Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	4 <u>1, 4</u> 6
	Security tapes	Scotch® Security Message Box Sealing Tapes	<u>45</u>
	Packing list envelopes	3M <sup>™</sup> Packing List Envelopes	5 <u>2-5</u> 3
	Label protection	Scotch® Label Protection Tape 821	<u>55</u>
	Labeling	3M <sup>™</sup> Masking Tapes 201+	57
	General repairs	3M <sup>™</sup> Low VOC Aerosols Family	1 <u>9-2</u> 0
	Cleaners for grime and glue	3M™ Citrus Base Adhesive Remover	22
	Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
	Masking tapes	3M <sup>™</sup> Masking Tape 101+ - 401+	5 <u>7-5</u> 8
	Filament tapes	3M™ Filament Tapes	47-49

_			
D	Maintenance Closet		
	Aerosol adhesives	3M <sup>™</sup> Super 77 <sup>™</sup> Multipurpose Spray Adhesive	19
	Cleaners and lubricants	$3M^{™}$ Silicone Lubricant, $3M^{™}$ Silicone Spray - Low VOC 60% and $3M^{™}$ 5-Way Penetrant	22
	Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
	Duct tapes	3M™ Duct Tapes	6 <u>1-6</u> 3
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	5 <u>7-5</u> 8
	Attach signage	3M <sup>™</sup> Double Coated Foam Tape 4496B	68

12			
	Heating/Air and Power Generation		
	Maintain electrical components	3M <sup>™</sup> Silicone Spray and 5-Way Penetrant	22
	Mark or label	3M <sup>™</sup> Masking Tape 201+	57
	Attach signage	3M™ Foam Tapes	68-69

_			
3	Maintenance Shop		
	Duct tapes	3M <sup>™</sup> Duct Tapes	6 <u>1-6</u> 3
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	<u>57-5</u> 8
	Aerosol adhesives	3M <sup>™</sup> Spray Adhesives	1 <u>9-2</u> 1
	Cleaners and lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
	Attach signage	3M <sup>™</sup> Foam Tapes	6 <u>8-6</u> 9
	Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7







# **Healthcare Facility Guide**

There are many places throughout your facility where 3M Maintenance and Repair Product solutions can help you run an efficient operation.









# **Manufacturing Facility Guide – Index**

	Applications	Product	Page
0	Lobby and Common Are	eas	
	Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
	Assemble and mount point of purchase and display cases	3M <sup>™</sup> Double Coated Foam Tape 4496B	<u>68</u>
	Permanently mount plastic hooks and racks	3M <sup>™</sup> Double Coated Foam Tape 4496B	68
	Install kick plates	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68
2	Restrooms		
	Permanently attach soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	68
	Remove gunk and grime	3M™ Citrus Base Cleaner and 3M™ Adhesive Remover	22
3	Cafeteria/Break Room		
	Hang signs	3M <sup>™</sup> Double Coated Foam Tape 4496B	<u>68</u>
	Attach/mount soap and hand sanitizing dispensers	3M <sup>™</sup> Double Coated Urethane Foam Tape 4026W	<u>68</u>
	Remove gunk and grime	3M™ Citrus Base Adhesive Remover	22
4	Laboratory		
	Label beakers and equipment	3M <sup>™</sup> Masking Tapes 101+ and 201+	57

5	Cold Storage Products		
	Cold temperature box sealing	Scotch® High Tack Box Sealing Tape 311+	44

6	Conveyors and Belts		
	Cleaners and lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
	Specialty tapes	3M <sup>™</sup> PTFE Film Tape 5490 and 3M <sup>™</sup> UHMW Film Tape 5423	71

<b>7</b>	Safety Room
	· · · · · · · · · · · · · · · · · · ·

_			
8	Office and Meeting Roo	ms	
	Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	4 <u>1, 4</u> 6
	Security tapes	Scotch® Security Message Box Sealing Tapes	45
	Packing list envelopes	3M <sup>™</sup> Packing List Envelopes	5 <u>2-5</u> 3
	Filament tapes	3M™ Filament Tapes	4 <u>7-4</u> 9
	Label protection	Scotch® Label Protection Tape 821	55
	Labeling	3M <sup>™</sup> Masking Tape 201+	<u>57</u>
	General repairs	3M <sup>™</sup> Low VOC Aerosols Family	1 <u>9-2</u> 0
	Cleaners for grime and glue	3M™ Citrus Base Adhesive Remover	22
	Permanently attach signs, plaques, awards, nameplates	3M <sup>™</sup> Double Coated Foam Tape 4496B	68

Facility Grounds/Outdoor		
Concrete repair	3M <sup>™</sup> Concrete Repair 600	26
Concrete sealing	3M™ Polyurethane Construction Sealant 525	30
Quick repairs	3M <sup>™</sup> Performance Plus Duct Tape 8979	62
Permanently attach signs	3M <sup>™</sup> VHB <sup>™</sup> Heavy Duty Mounting Tape 5952	69
Protect pipes	3M <sup>™</sup> Performance Plus Duct Tape 8979	62
Access panels	3M <sup>™</sup> Dual Lock <sup>™</sup> Reclosable Fasteners	7 <u>5-7</u> 6
Exterior sealing	3M™ Adhesive Sealant 740 UV	30
Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7

	Applications	Product	Page
1	Loading Dock/Shipping a	nd Receiving	
	Box sealing tapes and dispensers	Scotch® Box Sealing Tape 371 and Dispensers	41, 46
	Label protection tapes	Scotch® Label Protection Tape 821	<u>55</u>
	Filament tapes and dispensers	3M <sup>™</sup> Filament/Strapping Tapes and Dispensers	4 <u>7-4</u> 9
	Mark lanes, hazards and safety areas	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7
	Concrete repair	3M™ Concrete Repair 600	<u>26</u>
	Concrete sealing	3M <sup>™</sup> Polyurethane Construction Sealant 525	<u>30</u>
	Permanently attach signs	$3M^{^{\!\top\!\!}}$ Double Coated Foam Tape 4496B and $3M^{^{\!\top\!\!}}$ VHB $^{\!\top\!\!}$ Heavy Duty Mounting Tape 5952	6 <u>8-6</u> 9

1	Heating/Air and Power Generation		
	Maintain electrical components	3M <sup>™</sup> Silicone Spray and 3M <sup>™</sup> 5-Way Penetrant	22
	Mark or label	3M <sup>™</sup> Masking Tape 201+	_57
	Attach signage	3M <sup>™</sup> Foam Tapes	6 <u>8-6</u> 9
	Duct tapes	3M™ Duct Tapes	61-63

# 12 Stainless Steel Equipment

_			
3	Production Floor/Tool Cril	b/Warehouse	
	Aerosol adhesives	3M <sup>™</sup> Super 77 <sup>™</sup> Multipurpose Spray Adhesive	<u>19</u>
	Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7
	Concrete repair	3M™ Concrete Repair 600	26
	Anaerobic adhesives	3M <sup>™</sup> Scotch-Weld <sup>™</sup> Threadlockers	2 <u>4-2</u> 5
	Sealants	3M <sup>™</sup> Polyurethane Construction Sealant 525	30
	Duct tapes	3M™ Duct Tapes	<u>61-6</u> 3
	Masking tapes	3M <sup>™</sup> Masking Tapes 101+ - 401+	57-58

Maintenance Closet		
Aerosols adhesives	3M™ Super 77™ Multipurpose Spray Adhesive	19
Cleaners and lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	66-67
Duct tapes	3M <sup>™</sup> Duct Tapes	6 <u>1-6</u> 3
Masking tapes	3M™ Masking Tapes 101+ - 401+	<u>57-5</u> 8
Foam tapes	3M <sup>™</sup> Foam Tapes	68-69
Floor marking	3M <sup>™</sup> Safety Stripe Tape 5700 & 5702	67
Concrete repair	3M <sup>™</sup> Concrete Repair 600	26
Reclosable fasteners	3M <sup>™</sup> Dual Lock <sup>™</sup> Reclosable Fasteners	7 <u>5-7</u> 6

_			
15	Maintenance Shop		
	Duct tapes	3M <sup>™</sup> Duct Tapes	<u>61-6</u> 3
	Masking tapes	3M™ Masking Tapes 101+ - 401+	57-58
	Aerosol adhesives	3M <sup>™</sup> Spray Adhesives	1 <u>9-2</u> 1
	Cleaners and lubricants	3M <sup>™</sup> Silicone Lubricant, 3M <sup>™</sup> Silicone Spray - Low VOC 60% and 3M <sup>™</sup> 5-Way Penetrant	22
	Attach signage	3M <sup>™</sup> Foam Tapes	68-69
	Lane marking products	3M <sup>™</sup> Marking and Safety Tapes 471 & 5702, 3M <sup>™</sup> Lane Marking Applicator M-1, 3M <sup>™</sup> Ultra Durable Floor Marking Tape 971	6 <u>6-6</u> 7





# **Manufacturing Facility Guide**

There are many places throughout your facility where 3M Maintenance and Repair Product solutions can help you run an efficient operation.







### Floor and Wall Maintenance Solutions

There's a 3M solution that will help you mark, protect, seal, repair, attach and so much more.

It's the brand you can count on to complete everyday jobs quickly and reliably.



Mark safety lanes: 3M<sup>™</sup> Marking and Safety Tape and the 3M<sup>™</sup> Lane Marking Applicator M-1 (pg 66-67)



Marking for visibility and safety: 3M™ Marking and Safety Tape 471 (pg 66)



Temporary masking for wall protection: 3M™ Masking Tapes (pgs 57-60)



Sealing cracks and crevices: 3M™ Polyurethane Construction Sealant 525 (pg 30)



Permanent attachments: 3M<sup>™</sup> Double Coated Foam Tape 4496B or 3M<sup>™</sup> VHB<sup>™</sup> Heavy Duty Mounting Tape 5952 (pgs 68-69)



Attaching, holding and repeated opening and closing:
3M™ Reclosable Fasteners
(pgs 75-78)



Self-leveling concrete repair: 3M<sup>™</sup> Concrete Repair 600 (pg 26)







# **Equipment Maintenance Solutions**

Clean, lubricate, re-assemble, repair. There's a 3M solution that's close at hand.

For all those everyday jobs that need to be completed, quickly and reliably.



Lubricate and clean moving parts: 3M<sup>™</sup> 5-Way Penetrant (pg 22)



**Quick repairs:** 3M<sup>™</sup> Duct Tapes (pgs 61-63)



Reassemble parts: 3M™ Anaerobic Adhesives (pgs 24-25)



Clean up grease and oil: 3M™ Adhesive Remover (pg 22)



**Strong, flexible bonds:** 3M<sup>™</sup> Rubber and Gasket Adhesives (pg 26)



Simple versatility: 3M™ Masking Tapes (pgs 57-60)



Heads up—Marking for safety: 3M™ Vinyl Tapes (pgs 66-67)







### **Electrical Maintenance Solutions**

3M<sup>™</sup> Fire Protection Products are an integral part of a well-designed fire protection system.

Wrap, fill or mark. There's a 3M solution that can help you make buildings safer.




Fill pipe and cable spaces 5x faster: 3M™ Fire Barrier Rated Foam FIP 1-Step (pg 33)



Firestop multiple penetrations: 3M™ FCS-195+ Composite Sheet with 3M™ Fire Barrier Moldable Putty Stix MP+ (pgs 36-37)



Easy through-penetration firestop: 3M™ Fire Barrier Self-Locking Pillows (pg 36)



A wrap of protection: 3M™ Interam™ Endothermic Mat E-5A-4 (pg 39)



Maintain electrical components: 3M™ Duct Tapes (pgs 61-63)



**Label electrical components:** 3M<sup>™</sup> Masking Tapes (pgs 57-60)



Superior, low VOC firestop sealing: 3M™ Fire Barrier Sealant CP 25WB+ (pg 32)







### **HVAC Maintenance Solutions**

Easy-to-install fire barrier products designed to take the guess work out of firestopping.

Wrap, fill or mark. There's a 3M solution that can help you make buildings safer.



Flexible protection for grease and air ducts: 3M<sup>™</sup> Fire Barrier Duct Wrap 615+ (pg 38)



Firestop HVAC line sets: 3M™ Fire Barrier Rated Foam FIP 1-Step (pg 33)



For permanent fastening: 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL77 (pg 25)




For rigid and flexible ductwork: 3M™ Venture Tape™ 1581A (pg 65)



Sealing metal duct lines: 3M<sup>™</sup> Fire Barrier Sealant CP 25WB+ (pg 32)



Bond polystyrene with no surface degradation: 3M™ Polystyrene Insulation 78 Spray Adhesive (pg 20)



Protection for return air plenums: 3M™ Fire Barrier Plenum Wrap 5A+ (pg 38)







# **Metal Repair and Maintenance Solutions**

Bond, seal, attach, clean, repair. There's a variety of 3M solutions designed for metal components.

Keep these popular products on hand for everyday jobs and quick repairs.



Dependability and versatility on a roll: 3M<sup>™</sup> Venture Tapes<sup>™</sup> (pgs 64-65)



Immediately bond and seal: 3M™ Neoprene High Performance Rubber and Gasket Adhesive 1300 (pg 26)



Replace rivets, bolts, screws and welds: 3M™ VHB™ Tapes (pg 68-69)




Quickly attach signage: 3M™ Mounting Tapes (pg 68-69)



Interior sealing: 3M™ Polyurethane Sealant 540 (pg 30)



Free frozen threaded parts: 3M™ 5-Way Penetrant (pg 22)



Adhere and seal threaded assemblies: 3M™ Scotch-Weld™ Threadlockers (pg 24-25)







# **General Facility Maintenance Solutions**

Repairs go faster when you've got the right products for the job. Whether for short-term use or long-term performance, 3M has a solution.

Keep these popular products on hand for everyday jobs from clean-ups to emergency fixes.



Clean up gunk and grime: 3M™ Adhesive Remover (pg 22)



Reliable bonding of dissimilar substrates: 3M™ Scotch-Weld™ Structural Adhesive DP8010 (pg 28-29)



Industrial paint masking and more: 3M™ Masking Tape 301+ (pg 58)




Pallet unitizing keeps boxes together: 3M™ High Strength Tapes (pgs 47-49)



**Quick, reliable box sealing:** 3M<sup>™</sup> Box Sealing Tapes and Dispensers (pgs 40-46)



Firestop metal or CPVC fire sprinkler lines: 3M™ Fire Barrier Sealant IC 15WB+ (pg 32)



Waterproof backing resists moisture: 3M™ Performance Plus Duct Tape 8979 (pg 62)









# **Facility Solutions Checklist**

Your everyday challenges solved. Every day.

	Product	Product
Maintenance,	Adhesives	Hot Melt Adhesives
Production Floor,	Adhesive Transfer Tapes	Instant Adhesives
Paint Booth,	Aerosols	Masking Tapes
Tool Crib	Anaerobic/Threadlockers	Reclosable Fasteners
	Cleaners/Lubricants	Sealants
	Concrete Repair	Structural Adhesives
	Duct Tapes	Floor & Safety Tapes
	Foam/3M™ VHB™ Tapes	
	Foil/HVAC Tapes	
	Product	Product
Loading Dock,	Box Sealing Dispensers	Light Duty Packaging Tapes
Offices, Shipping	Box Sealing Tapes	Masking Tapes
and Receiving	Filament & Strapping Tapes	Packaging Aerosols
	Filament Tape Dispensers	Packing List Envelopes
	Hot Melt Adhesives	Pouch Tapes
	Filament Tape Dispensers	Security Use Tapes
	Label Protection Tapes	Tape Pads and Sheets
	Product	Product
Breakroom,	Aerosols	Mounting Tapes
Restroom, Outdoor,	Cleaners/Lubricants	Reclosable Fasteners
General Facility	Concrete Repair	Sealants
	Duct Tapes	
	Fire Barrier Solutions	Floor & Safety Tapes
	Masking Tapes	
		L
Othor		
Other		
Customer/Location	Key Contact	 Date



# **Aerosol Adhesives**

Performance. Productivity. Portability.

#### 3M<sup>™</sup> Super 77<sup>™</sup> Multipurpose **Spray Adhesive**

An extremely versatile, fast-drying spray adhesive that bonds a wide range of lightweight materials. Our permanent bond provides fast results to keep projects moving ahead.

- Fast, aggressive tack for a guick bond that reduces set time
- Extended bond time allows 15 seconds. to 30 minutes after application before attaching surfaces
- Bonds paper, cardboard, fabric, insulation, plastic, metal, wood and more



Lea	uct UPC	Size	Net Wt.	Color	Case Qty	Units
	0-00-21200- <b>21210</b> -9	24 fl oz	16.75 oz	Clear	12	CN
	0-00-76308- <b>86234</b> -3	20 fl oz	13.44 oz	Clear	12	CN
	0-00-21200- <b>96474</b> -9	6 fl oz	4.4 oz	Clear	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use

#### 3M<sup>™</sup> Super 77<sup>™</sup> CA Multipurpose Spray Adhesive - Low VOC <25%

This fast-drying adhesive bonds a wide range of lightweight materials quickly. A low-VOC version of 3M<sup>™</sup> Super 77.

- Low soak-in and long open time
- Bonds paper, cardboard, fabric, cushion foam, plastic, metal, wood and more
- Low VOC. <25%, aerosol is GREENGUARD Children and Schools Certified<sup>SM</sup>, meets CARB, OTC and LADCO requirements, and helps contribute to LEED® credits



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-51111- <b>97956</b> -3	24 fl oz	18 oz	Clear	12	CN



#### 3M™ Hi-Strength 90 Spray Adhesive

A versatile, fast-drying adhesive that forms extremely strong bonds on a wide array of materials and works well with plastic, metal, wood and much more.

- A very aggressive tack for high initial grab plus sufficient open time to position materials properly
- Variable-width spray pattern for more control, minimum waste
- Provides higher coverage than competing spray adhesives
- Creates soft, non-dimpling glue lines for clean appearance





Pro	ead duct UPC	Size	Net Wt.	Color	Case Qty	Units
	0-00-21200- <b>30023</b> -3	24 fl oz	17.6 oz	Clear	12	CN
	0-00-76308- <b>86235</b> -0	20 fl oz	12.23 oz	Clear	12	CN
	0-00-51111- <b>07278</b> -3	24 fl oz	17.6 oz (Inverted)	Clear	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M™ Hi-Strength 90 CA Spray Adhesive – Low VOC <25%

An all-around adhesive capable of forming extremely strong bonds on a wide array of materials. A low VOC version of 3M<sup>™</sup> High Strength 90.

- Bonds woods, laminates, polyethylene, polypropylene, metals and more
- High coverage, variable-width lace spray pattern
- Low VOC, <25%, aerosol is GREENGUARD Children and Schools Certified<sup>SM</sup>, meets CARB, OTC and LADCO requirements, and helps contribute to LEED® credits



UPC	Size	MEL WI.	COIOI	Case Qty	UIIILS
0-00-51111- <b>97957</b> -0 2	4 fl oz	19 oz	Clear	12	CN


# 3M Low-VOC Line

Meets California Air Resources Board (CARB), Ozone Transport Commission (OTC) and Lake Michigan Air District Consortium (LADCO) VOC requirements, is GREENGUARD Children & Schools Certified<sup>SM</sup>, and helps contribute to Leed® credits.









#### 3M<sup>™</sup> Pressure Sensitive Spray Adhesive 72

A permanently tacky, industrial grade spray adhesive ideal for many one-surface bond applications. A touch of blue color helps with precise application.

- Adhesive remains permanently tacky for easy repositioning
- Very long open time allows bonds to be made hours or days after application
- Variable spray pattern minimizes waste and overspray



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>30025</b> -7	24 fl oz	17.3 oz	Blue	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M™ Foam Fast 74 Spray Adhesive

A fast-drying spray adhesive that bonds foam and fabric to a wide range of substrates. Its permanent bond provides fast results to keep projects moving ahead.

- Non-yellowing formula dispenses easily in a lace-spray pattern optimized for foam bonding
- Provides professional, industrial strength for demanding applications
- Offers a fast, aggressive tack for a quick assembly of high-stress bonds
- Allows for a bond time of 15 seconds to 30 minutes



ro	duct	Size	Net Wt.	Color	Case Qty	Units
	0-00-21200- <b>50045</b> -9	24 fl oz	16.9 oz	Clear	12	CN
	0-00-21200- <b>82242</b> -1	24 fl oz	16.9 oz	Orange	12	CN
	0-00-51111- <b>07277</b> -6	24 fl oz	16.9 oz (Inverted)	Orange	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M<sup>™</sup> Foam Fast 74 Spray Adhesive - Low VOC <25%

A low-VOC version of 3M<sup>™</sup> Foam & Fabric 74 used for bonding flexible urethane or latex foam together and to bond other materials such as wood, metal and plastics.

- Non-yellowing formula dispenses easily in a lace-spray pattern optimized for foam bonding
- Low VOC, <25%, aerosol is GREENGUARD Children and Schools Certified<sup>SM</sup>, meets CARB, OTC and LADCO requirements, and helps contribute to LEED® credits



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-51111- <b>97967</b> -9	24 fl oz	19 oz	Clear	12	CN
0-00-51111- <b>97958</b> -7	24 fl oz	19 oz	Orange	12	CN

#### 3M<sup>™</sup> Repositionable 75 CA Spray Adhesive - Low VOC <30%

This versatile, pressure sensitive adhesive spray provides a "tape-like" bond on many lightweight materials and is suitable for temporary holding or positioning. It adheres in seconds, yet has an extra-long tack range that allows repeated lifting and repositioning of materials.

- · Adhesive holds strong yet removes easily for repeated use
- Low soak-in formula allows the bonding of lightweight substrates without damage
- Formula resists bleeding and staining
- Dries clear, producing a smooth glue line and resists wrinkling on most materials



#### 3M<sup>™</sup> Polystyrene Insulation 78 Spray Adhesive

A high strength, high temperature resistant, industrial grade spray adhesive effective for bonding most insulation: fiberglass, expanded polystyrene foam, and extruded polystyrene foam.

- Inverted spray technology for less waste, better coverage
- Bonds polystyrene foam without dissolving or degrading
- Fast-drying formula helps speed assembly

UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>41593</b> -7	24 fl oz	17.9 oz	Clear	12	CN
0-00-51111- <b>07279</b> -0	24 fl oz	17.9 oz (Inverted)	Clear	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M™ Rubber and Vinyl 80 Spray Adhesive

A high performance, neoprene-based contact aerosol spray adhesive ideal for bonding rubber and vinyl sheets, including weather stripping.



- Fast-setting contact adhesive produces rapid results
- Resistance to plasticizing oils allows for bond resilience

UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>82618</b> -4	24 fl oz	19 oz	Yellow	6	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

### $3M^{\text{\tiny TM}}$ Hi-Strength 94 ET Spray Adhesive - Low VOC < 20%

Creates an aggressive, postformable bond for attaching decorative laminate. metal and some rubber substrates.

- Features longer open time and more aggressive tack than comparable adhesives
- Effectively bond metals, wood, rubber, carpet and flooring
- Low VOC, <20%, aerosol is GREENGUARD Children and Schools Certified<sup>SM</sup>, meets CARB, OTC and LADCO requirements, and helps contribute to LEED<sup>®</sup> credits



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-51111- <b>97977</b> -8	24 fl oz	19.8 oz	Clear	12	CN









### Aerosols for Packaging

#### 3M<sup>™</sup> Shipping-Mate<sup>™</sup> Case Sealing Adhesive

Features a clear, fast tack adhesive that permanently seals closure flaps on many corrugated shipping containers.

- Holds securely
- Quick drying
- Long lasting




Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

# 3M<sup>™</sup> Shipping-Mate<sup>™</sup> Palletizing Adhesive

This clear, fast tacking adhesive holds plastic bags or coated cartons onto pallets.

- · Low mist formula
- Easy separation after shipment



Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

# Designed for Cost Sensitive Applications

20, 24, 27

#### 3M<sup>™</sup> Heavy Duty 20 Spray Adhesive

Forms a powerful, permanent bond to wood, laminate, metal, plastic and more. Simply spray the adhesive on one or both surfaces, wait 15 seconds to 30 minutes, and press surfaces together to form a tight bond.

- Fast, aggressive tack and low soak-in eliminates clamping and dry time
- Variable lace spray pattern allows precision placement
- Extended bond time allows 60 seconds to 30 minutes before attaching surfaces

soloro attaorning car	14000					
UPC	Size	Net Wt.	Color	Case Qty	Units	
0-00-51111- <b>07861</b> -7	20 fl oz	13.8 oz	Clear	12	CN	

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M™ Foam & Fabric 24 Spray Adhesive

An economical, fast-drying spray adhesive that bonds foam and fabric to a wide range of substrates. Permanent bond provides fast results to keep projects moving ahead. Non-yellowing formula.

- Dispenses with a lace-spray pattern optimized for foam bonding
- Provides industrial strength for demanding applications at an economical price
- Offers a fast, aggressive tack for a quick assembly of high-stress bonds
- Allows for a bond time of 15 seconds to 30 minutes

UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-51111- <b>07862</b> -4	20 fl oz	13.8 oz	Orange	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M<sup>™</sup> Multi-Purpose 27 Spray Adhesive

Quickly bonds paper, cardboard, fabrics, soft foams, plastic films, fiberglass insulation and other lightweight materials. Simply spray the adhesive on one or both surfaces, wait 15 seconds to 10 minutes, and press surfaces together to form a tight bond.

- Fast tack helps eliminate dry time
- Mist spray pattern helps ensure better coverage
- Extended bond time helps reduce waste and keep assembly lines moving
- Portable, easy to use and requires no additional equpment



Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.







# Cleaners and Lubricants

#### 3M™ Adhesive Remover

Ideal for removing adhesive residue or for surface preparation prior to use of adhesive and can be used for cleaning heavy oils, greases, silicone, tar and paraffinic materials such as Cosmoline<sup>™</sup> and wax.

- Removes a variety of adhesives and other substances
- Non-corrosive formula is safe for most equipment
- · Cleans oil, grease, tar, and grime quickly and easily to keep processes moving forward



6041 6040

UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>49142</b> -9	1 gal	1 gal	Pale Yellow	4	CN
0-00-21200- <b>49048</b> -4	24 fl oz	18.5 oz	Pale Yellow	6	CN
0-00-21200- <b>39296</b> -2	6.25 fl oz	5 oz	Pale Yellow	6	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M<sup>™</sup> Adhesive Remover – Low VOC <20%

A low-VOC version of 3M<sup>™</sup> Adhesive Remover. Removes a variety of adhesives and other substances.

- Non-corrosive formula is safe for most equipment
- Cleans oil, grease, tar, and grime quickly and easily to keep processes moving forward
- Low VOC, <20%, aerosol is GREENGUARD Children and Schools Certified<sup>SM</sup>, meets CARB, OTC and LADCO requirements, and helps contribute to LEED® credits



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-51111- <b>97974</b> -7	24 fl oz	18.7 oz	Clear	12	CN

#### Scotch® Sticker & Marker Remover 6042

A citrus base adhesive remover in the form of a pH neutral, easy-to-control pen. Used for removing adhesives, marker and crayon from walls, lockers, desks, glass, folders and more. Lifts grime and grease from garage areas or work sites.



UPC	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>50021</b> -3	0.29 oz	Yellow	12	CS

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M™ Citrus Base Cleaner

This liquid cleaner/degreaser cleans without streaking and has a fresh citrus scent.

- Contains no chlorinated or petroleum based solvents
- · Removes grease, oil, ink and most adhesives without harsh chemicals or hours of soaking

Can help prepare surfaces for adhesive bonding						
UPC	Size	Net Wt.	Color	Case Qty	Units	
0-00-21200- <b>76394</b> -6	24 fl oz	18.5 oz	Transparent	12	CN	

0 00 21200 1000.0	0_		···aiiopaioiit		0
Not for Retail/Consumer sale o	or use in CA	& other state	es. Consult local	air quality rule	es before use.







#### 3M<sup>™</sup> 5-Way Penetrant

A versatile, silicone-free product that lubricates, cleans, inhibits rust and corrosion, and demoisturizes.

- Helps free rusted and frozen nuts and bolts
- Excellent light duty lubricant for many delicate or precision instruments
- Ideal tapping lubricant for stainless steel and aluminum
- Displaces moisture and "dries out" electrical apparatus, generators and motors



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>21305</b> -2	24 fl oz	16.8 oz	Light Amber	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M<sup>™</sup> Silicone Lubricant

This high quality silicone lubricant works for many applications. Formulated for extreme conditions, it will not freeze at -28°F nor degrade at 350°F. Contains no petroleum oils to stain fabrics.

- Lubricates moving parts and seals out moisture
- Eliminates squeaks caused by friction
- Protects against rust and corrosion
- Prevents buildup of glues, waxes, inks and paints



UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-21200- <b>85822</b> -2	24 fl oz	13.25 oz	Clear	12	CN

Not for Retail/Consumer sale or use in CA & other states. Consult local air quality rules before use.

#### 3M<sup>™</sup> Silicone Spray – Low VOC 60%

The same great features as 3M<sup>™</sup> Silicone Lubricant with a low VOC formulation that is GREENGUARD Children and Schools Certified<sup>SM</sup>, meets CARB, OTC and LADCO requirements, and helps contribute to LEED® credits

- Fast drying, non-staining
- FDA listed ingredients

UPC	Size	Net Wt.	Color	Case Qty	Units
0-00-51111- <b>07732</b> -0	24 fl oz	13.4 oz	Clear	12	CN





# **Hot Melt Adhesives**

#### 3M<sup>™</sup>Hot Melt Adhesive 3762



An economical, fast-setting resin solid hot melt adhesive designed for general purpose applications.

- Aggressive hot tack rapidly achieves handling strength for packaging and other applications
- Medium open time allows for positioning and fit adjustment
- Securely bonds difficult to seal substrates such as lightly waxed surfaces
- Use on corrugate, paperboard cartons and POP displays

3762Q\*

3762AE

UPC	Stick ID	Size	Color	Case Qty	Units
0-00-21200- <b>82596</b> -5	3762AE	1/2" x 12"	Tan	11	LB
0-00-21200- <b>65261</b> -5	3762Q*	5/8" x 8"	Tan	11	LB

<sup>\*</sup> Special size designed for use with the Quadrack converter.

#### 3M<sup>™</sup> Hot Melt Adhesive 3792



A low-volatile-organic compound (VOC) hot melt adhesive that produces minimal odor when heated, helping to support a comfortable work environment.

- Dries clear for clean appearance
- 40-50 second open bond time allows for fit adjustment and positioning
- Excellent "Go-to" adhesive for woodworking, particle board, chipboard and cushioning foams

3792AE

UPC	Stick ID	Size	Color	Case Qty	Units
0-00-21200- <b>82583</b> -5	3792AE	1/2" x 12"	Clear	11	LB
0-00-21200- <b>65263</b> -9	3792Q*	5/8" x 8"	Clear	11	LB

<sup>\*</sup> Special size designed for use with the Quadrack converter.

#### 3M<sup>™</sup> Hot Melt Applicator AE II

It is a high volume, self-contained applicator featuring an industrial grade 250-watt PTC (positive temperature coefficient) system for a consistent 400°F (204°C) for application.

- Delivers up to 4 lbs. of adhesive per hour
- Contoured grip and wide trigger provide operator comfort and precise control
- Positive check valve nozzle helps minimize dripping
- Built-in stand helps keep applicator upright, stable and ready for use
- Designed for use with 1/2" x 12" sticks

UPC	Use with these sticks	Case Qty	Units
0-00-21200- <b>96594</b> -4	3762AE & 3792AE	5	EA*

<sup>\*</sup> A general purpose tip (.090) is supplied with each applicator.

# 3M<sup>™</sup> Hot Melt Applicator TC with Quadrack Converter and Palm Trigger

Unique design quickly grips the adhesive stick and smooths the melt flow.

- Delivers up to 3.5 lbs. of adhesive per hour
- Palm trigger improves operator comfort
- Quadrack converter provides positive feed-through
- Maintains a steady 385°F (196°C)
- Designed for use with 5/8" x 8" Quadrack (Q) sticks

UPC	Product #	Use with these sticks	Case Qty	Units
0-00-21200- <b>89445</b> -9	9990	3762Q & 3792Q	1	EA*

<sup>\*</sup> A general purpose tip (0.093") is supplied with each applicator.



For use with AE sticks only.



For use with Quadrack "Q" sticks only.








# **Anaerobic Adhesives**

One-component anaerobic adhesives that cure and seal threaded assemblies that meet a wide range of applications to prevent vibration loosening and/or leakage. All products provide excellent vibration, corrosion, and shock resistance.

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL22

Purple - Screwlock. For low removal torque fasteners less than a 1/4" (6 mm).

- · Prevents nuts and bolts from loosening with vibration
- Fills and seals threads completely to help stop corrosion, rust and leaks
- · Eliminates the need for lock washers and other locking components
- Long open time that cures quickly



#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL42

Blue - Nutlock. Provides vibration, corrosion, and shock resistance for fasteners in assembled form.

- Fills and seals threads completely to help stop corrosion, rust and leaks
- Helps maintain torque
- Removable with hand tools
- · Securely holds dissimilar metals




#### 3M™ Scotch-Weld™ Threadlocker TL43


Blue - Provides vibration, corrosion, and shock resistance for 1/4"-3/4" (6.4-19 mm) fasteners in assembled form

- Oil tolerant formula prevents vibration and provides shock resistance
- Fills and seals threads completely to help stop corrosion, rust and leaks
- Helps maintain torque
- Removable with hand tools





#### **Threadlockers Selection Guide**

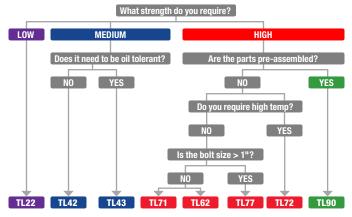

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL62

Red – Studlock. High strength with controlled torque tension.

- · Long open time anaerobic adhesive that cures quickly
- · Prevents nuts and bolts from loosening with vibration
- Fills and seals threads completely to help stop corrosion, rust and leaks
- Eliminates the need for lock washers and locking components


d oth	ner	Statement of the statem
or	Case Qty	Units
<u> </u>	10	BO

UPC	Size	Color	Case Qty	Units
0-00-48011 <b>-62609</b> -3	0.33 fl oz/10 mL	Red	10	В0
0-00-48011- <b>62610</b> -9	1.69 fl oz/50 mL	Red	10	В0

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL71

Red – Permanent studlock for bolts and studs up to 1" (25 mm).

- Prevents nuts and bolts from loosening with vibration
- Fills and seals threads completely to help stop corrosion, rust and leaks
- · Eliminates the need for lock washers and other locking components
- Long open time anaerobic adhesive that cures quickly









#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL72

Red – High temperature studlock with gap filling for larger diameter coarse threaded parts.

- Locks and seals bolts and studs up to 1" and under high-temperature conditions (up to 450°F)
- Fills and seals threads completely to help stop corrosion, rust and leaks
- Helps maintain torque
- High viscosity prevents dripping and migrating after assembly
- Tested Military Specification: MIL-S-46163A

UPC	Size	Color	Case Qty	Units
0-00-51115- <b>25133-</b> 7	0.33 fl oz/10 mL	Red	10	В0
0-00-51115- <b>25137-</b> 5	1.69 fl oz/50 mL	Red	10	В0

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL77

Red – Heavy duty, permanent for fasteners up to 1.5" (38mm) with coarse threads.

- Securely holds dissimilar and coarse metals, including up to 1-1/2 inch diameter bolts
- Permanently fills and seals threads completely to help stop corrosion, rust and leaks
- Fixture time as little as 20 minutes; fully cures in 24 hours to help reduce lengthy downtime
- Can be disassembled with localized heat

UPC	Size	Color	Case Qty	Units
0-00-51115- <b>25142</b> -9	0.33 fl oz/10 mL	Red	10	ВО
0-00-51115- <b>25143</b> -6	1.69 fl.oz/50 ml	Red	10	BO

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Threadlocker TL90

Green – Penetrating adhesive for pre-assembled fasteners and porosity sealing of welds.

- Low viscosity provides wicking action that helps lock and seal small compression and ferrule fittings
- Fills and seals threads completely to help stop corrosion, rust and leaks
- · Vibration and shock resistant
- Works on parts that reach a service temperature up to 400°F/204°C

UPC	Size	Color	Case Qty	Units
0-00-48011- <b>62615</b> -4	0.33 fl oz/10 mL	Green	10	ВО
0-00-48011- <b>62616</b> -1	1 69 fl oz/50 ml	Green	10	BΩ

# **Instant Adhesives**

# 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Plastic & Rubber Instant Adhesive PR100

This low viscosity instant adhesive is formulated to give exceptional performance on difficult-to-bond substrates such as EPDM, nylon, polypropylene and polyethylene, with use of an appropriate primer.



- Typically reaches handling strength in under 20 seconds; full cure in 24 hours
- Achieves a strong, durable and lasting bond, with overlap shear strength over 2 000 psi

Lead	ai suengui ove	i 2,000 psi				
Product	UPC	Size	Color	Case Qty	Units	
0-00-	51115- <b>25214</b> -3	20 gram bottle	Clear	10	В0	
0-00-	51115- <b>25213</b> -6	500 gram bottle	Clear	1	В0	

#### 3M™ Scotch-Weld™ Instant Adhesive CA40H

A clear, medium viscosity instant adhesive formulated for better void filling capabilities than lower viscosity instant adhesives.

- Enables more controlled and precise application with less mess and run off
- · High strength and impact resistance
- Reaches handling strength in under 40 seconds
- Achieves a strong, durable and lasting bond, with overlap shear strength over 2,000 psi

UPC	Size	Color	Case Qty	Units
0-00-21200- <b>21073</b> -0	1 fl oz bottle	Clear	12	ВО

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Super Fast Instant Adhesive SF100

A low viscosity instant adhesive with exceptional performance on difficult-to-bond plastics and rubbers, acidic and/or contaminated surfaces such as: woods, leathers, cardboard and oil surfaces.


- · Super fast cure for high speed production
- Typically reaches handling strength in under 5 seconds; full cure in 24 hours
- Pinch a precise drop or squeeze for a steady bead
- Achieves a strong, durable and lasting bond, with overlap shear strength over 2,000 psi

UPC	Size	Color	Case Qty	Units
0-00-48011- <b>62631</b> -4	20 gram bottle	Clear	10	ВО









# **Solvent Based Adhesives**

#### 3M™ Nitrile High Performance Plastic Adhesive 1099

This fast drying adhesive forms a durable bond at room temperature, but also has optional heat-initiated chemical reaction to achieve even higher bond properties.

- · Forms strong bonds on most vinyls and plastics
- · Resists weathering, water, oil, plasticizer migration and fuels
- · Provides strong, quick drying flexible bonds



Size	Color	Case Qty	Units	
5 oz	Tan	36	TB	

#### 3M<sup>™</sup> Neoprene High Performance Rubber and Gasket Adhesive 1300

A versatile, solvent based adhesive offering high immediate strength and good heat resistance.

- Adheres neoprene, SBR, butyl, and other types of rubbers to other various substrates
- Excellent moisture and heat resistance performing up to 300°F/148°C
- Can be used as a contact or wet-bond adhesive



Lead Product UPC	Size	Color	Case Qty	Units
0-00-21200- <b>19868</b> -7	5 oz	Yellow	36	TB

#### 3M<sup>™</sup> Nitrile High Performance Rubber and Gasket Adhesive 847

A versatile, solvent based adhesive with comparatively low viscosity for easy application.

- High performance adhesive intended to bond gaskets
- Adheres to nitrile rubber (BUNA), neoprene, SBR, butyl, leather, vinyl and various rubbers
- · Excellent fuel, oil and water resistance
- Offers resistance to heat and moisture, performing in temperatures up to 300°F/148°C



#### 3M™ Industrial Adhesive 4799

A brushable, heat resistant adhesive that develops strength rapidly providing good creep resistance.

- Bonds to rubber (including EPDM) and many materials such as canvas and linoleum to metal, wood and concrete
- Dries rapidly to a water and heat resistant bond
- Low soak-in on porous surfaces





#### 3M<sup>™</sup> Neoprene High Performance Contact Adhesive 1357

A versatile, solvent based adhesive offering high immediate handling strength and good heat resistance.

Adheres, sheet metals, such as stainless steel, aluminum, cold rolled steel and many plastics to numerous other substrates

 Excellent moisture and heat resistance up to 300°F (148°C)

0-00-21200-19892-2

resistance up to 500 F (140 V)							
UPC	Size	Color	Case Qty	Units			
0-00-21200- <b>19887</b> -8	5 oz.	Gray-Green	36	TB			
0-00-21200- <b>19890</b> -8	Pint	Gray-Green	12	PT			

Gray-Green

12

#### 3M™ Fastbond™ Contact Adhesive 30NF

ΩT



QT

A water-dispersed adhesive with high coverage, immediate bond strength, a long bonding range and good heat resistance.

- Bonds most foamed plastics, plastic laminate, wood, plywood, and canvas to themselves and to each other
- Creates a very high strength, high temperature resistant bond with up to a 4 hour bonding range
- Non-flammable in the wet state

Lead				-	
Produ		Size	Color	Case Qty	Units
0	-00-21200- <b>21185</b> -0	QT	Green	12	QT
0	-00-21200- <b>21186</b> -7	Gal	Green	4	GA
_0	-00-21200- <b>21187</b> -4	5 gal	Green	5	GA
0	-00-21200- <b>21180</b> -5	QT	Neutral	12	QT
0	-00-21200- <b>21181</b> -2	Gal	Neutral	4	GA
0	-00-21200- <b>21182</b> -9	5 gal	Neutral	5	GA

# **Concrete Repair**

#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Concrete Repair Self-Leveling 600

- Quick set formula and bubble-free liquid is low in viscosity and self-levels for ease of installation
- Dispenses with a regular caulk gun
- Ideal for minor repairs on walkways, stairways, pools, decks, patios, and general maintenance and repair

UPC	Description	Size	Color	Case Qty	Units
0-00-21200- <b>96596</b> -8	Cartridge/ 2 Mix Tips	8.4 fl oz	Gray	6	CQ
0-00-48011- <b>53382</b> -7	Cartridge Mix Tip	8.4 oz	-	3 nozzles per bag 12 bags	CS

For smaller jobs, see Duo-Pak cartridge DP600 and DP600NS in 48.5mL size, page 29.







# 3M™Scotch-Weld™Structural Adhesive Duo-Paks

#### Updates to the delivery systems

- Cartridge volume changes
- Manual plunger and nozzle changes
- New seal to eliminate cartridge leaks

- New isolated outlet to prevent cross-contamination
- Updated cap to prevent accidental bonding of cap to cartridge

#### **Cartridge Volume Updates**





CURRENT Delivery System (47.0 or 50.0 mL)

**NEW** Delivery System (48.5 mL)





**CURRENT** Delivery System (37 mL)

NEW Delivery System (50 mL)

# 3M™ Scotch-Weld™ EPX™ Plunger Update

#### **CURRENT Plunger Set**



#### 3M<sup>™</sup> Scotch-Weld<sup>™</sup> EPX<sup>™</sup> Plungers (for use with EPX Plus II)

1:1 plunger 0-00-76308-**86389**-0 (10/CS) 2:1 plunger 0-00-76308-86390-6 (10/CS) (1:1 and 2:1 plungers changed)

10:1 plunger 0-00-76308-86391-3 (10/CS)

#### **NEW Plunger Set**



1:1 / 2:1 Plunger (shared) Shared plunger replaces 1:1 and 2:1.

3M<sup>™</sup> Scotch-Weld<sup>™</sup> EPX<sup>™</sup> Plungers (for use with EPX Plus II) 1:1 / 2:1 plunger (shared)

0-00-63803-**01000**-0 (10/CS)



10:1 Plunger (Same as current)

10:1 plunger 0-00-76308-86391-3 (10/CS)

# NO CHANGE

#### 3M™ Scotch-Weld™ EPX™ Mixing Nozzles NEW NEW 48.5/50 mL 48.5/50 mL

Size	UPC	Case Qty
48.5/50mL	0-00-76308- <b>86434</b> -7	36
	0-00-63806- <b>01003</b> -1	1200/case
48.5/50mL	0-00-63806- <b>01004</b> -8	72
	0-00-63806- <b>01005</b> -5	2000/case
	<b>Size</b> 48.5/50mL	48.5/50mL 0-00-76308- <b>86434</b> -7 0-00-63806- <b>01003</b> -1 48.5/50mL 0-00-63806- <b>01004</b> -8



Product	Size	UPC	Case Qty
Square Orange	45mL	0-00-51115- <b>69043</b> -3	36
Square Gold	200mL & 400mL	0-00-21200- <b>97331</b> -4	36
Helical White	200mL & 400mL	0-00-21200- <b>87982</b> -1	36
Helical Orange High Throughput	490mL	0-00-51115- <b>69042</b> -6	36
Square Green Low Waste	490mL	0-00-51115- <b>81619</b> -2	36

## 3M™ EPX™ Applicators



3M™ EPX™ Plus II Applicator

For use with 3M™ Scotch-Weld™ Structural Adhesives in 37mL, 45mL. 48.5mL, and 50mL sizes. 0-00-76308-86383-8 (10/CS)



3M™ EPX™ Pneumatic Applicator For use with 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Structural Adhesives in 48.5mL and 50mL sizes.

0-00-21200-83528-5 (1/CS)









3M™ EPX™490mL Manual Applicator For use with 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Structural Adhesives 490mL size. 0-00-51115-**71115**-2 (1/CS)







# 3M<sup>™</sup> Scotch-Weld<sup>™</sup> Structural Adhesives

Two-part adhesives, in Duo-Pak cartridges, are precisely proportioned and cure when the two components mix.




	Adhesive	Product (Color)	Key Features	Mix Ratio	Approximate Mixed Work Life at 75°F	Size	Case qty	UPC	Use with these dispensers	Mixing Nozzles
		DP100 Plus (Clear)	Very flexible, colorless. Low viscosity. Bonds	1:1	4 min.	48.5mL	12/cs	0-06-38060- <b>08976</b> -7	EPX Plus II, 1:1 plunger or NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
	oxies	Lead	metals, ceramics and glass, wood, and many plastics.			200mL	12/cs	0-00-21200- <b>87266</b> -2	EPX 200/400mL Manual	200mL Square Gold or Helical White
	Flexible Epoxies	DP125 (Gray)	High performance, very flexible. Ideal for	1:1	25 min.	48.5mL	12/cs	0-06-38060- <b>08985</b> -9	EPX Plus II, 1:1 plunger or NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
	Fle	Lead Product	applications involving dissimilar surfaces.			200mL	12/cs	0-00-21200- <b>87844</b> -2	EPX 200/400mL Manual	200mL Square Gold or Helical White
						400mL	6/cs	0-00-21200- <b>87845</b> -9	EPX 200/400mL Manual	400mL Square Gold or Helical White
		DP420NS (Black)	Tough durable bonds. Non-sag. Bonds	2:1	20 min.	50mL	12/cs	0-06-38060- <b>08987</b> -3	EPX Plus II, NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
		Lead	extremely well to metals, ceramics, wood and some plastics.			200mL	12/cs	0-00-21200- <b>39286-</b> 3	EPX 200/400mL Manual	200mL Square Gold or Helical White
e			·			400mL	6/cs	0-00-21200- <b>39287</b> -0	EPX	400mL Square Gold or Helical White
High strength. Excellent environmental resistance	Epoxies	DP460 (Off-White)	Toughened for impact resistance. Bonds	2:1	60 min.	50mL	12/cs	0-06-38060- <b>08998</b> -9	EPX Plus II, NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
ental re	ened E		extremely well to metals, ceramics, wood and some plastics.			200mL	12/cs	0-00-21200- <b>87830</b> -5	EPX 200/400mL Manual	200mL Square Gold or Helical White
ironm	Toughened	Tough	· 			400mL	6/cs	0-00-21200- <b>87831</b> -2	EPX 200/400mL Manual	400mL Square Gold or Helical White
ent env		DP460NS (Off-White)	Tough durable bonds. Non-sag.	2:1	60 min.	50mL	12/cs	0-06-38060- <b>08968</b> -2	EPX Plus II, NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
Excell			Ideal for vertical applications.			200mL	12/cs	0-00-21200- <b>43671</b> -0	EPX 200/400mL Manual	200mL Square Gold or Helical White
rength.						400mL	6/cs	0-00-21200- <b>43672</b> -7	EPX 200/400mL Manual	400mL Square Gold or Helical White
ligh stı		DP100 (Clear)	<b>General purpose</b> . Rigid bonds. Low viscosity.	1:1	5 min.	48.5mL	12/cs	0-06-38060- <b>08994</b> -1	EPX Plus II, 1:1 plunger or NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
			Bonds metals, ceramics, and wood.			200mL	12/cs	0-00-21200- <b>87260</b> -0	EPX 200/400mL Manual	200mL Square Gold or Helical White
						400mL	6/cs	0-00-21200- <b>87261</b> -7	EPX 200/400mL Manual	400mL Square Gold or Helical White
	xies	DP100FR (Cream)	Flame retardant. Low viscosity and fast setting.	1:1	6 min.	48.5mL	12/cs	0-06-38060- <b>08989</b> -7	EPX Plus II, 1:1 plunger or NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
	Rigid Epoxies		UL94 V-0 rating. Bonds metals, ceramics, and wood.			200mL	12/cs	0-00-48011- <b>56744</b> -0	EPX 200/400mL Manual	200mL Square Gold or Helical White
	Rig					400mL		0-00-48011- <b>56743</b> -3	EPX 200/400mL Manual	400mL Square Gold or Helical White
		DP100NS (Translu-	General purpose. <b>Non-sag</b> . Bonds metals,	1:1	5 min.	48.5mL	12/cs	0-06-38060- <b>08974</b> -3	EPX Plus II, 1:1 plunger or NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
		cent)	ceramics, and wood.			200mL	12/cs	0-00-21200- <b>87264</b> -8	EPX 200/400mL Manual	200mL Square Gold or Helical White
				_		400mL	6/cs	0-00-21200- <b>87265</b> -5	EPX 200/400mL Manual	400mL Square Gold or Helical White





	Adhesive	Product (Color)	Key Features	Mix Ratio	Approximate Mixed Work Life at 75°F	Size	Case qty	UPC	Use with these dispensers	Mixing Nozzles
		DP8805NS (Green)	Non-sag, toughened adhesive. Low odor.	10:1	5 min.	45mL	12/cs	0-00-76308- <b>98433</b> -5	EPX Plus II, 10:1 plunger	45mL Square Orange
	Acrylic	<b>Lead Product</b>	Bonds difficult surfaces such as powder coats and oily surfaces.			490mL	6/cs	0-00-76308- <b>98439</b> -7	EPX 490mL Manual	490mL Square Green or Helical Orange
SS.	Low Odor Acrylic	DP8810NS (Green)	Non-sag, toughened adhesive. Low odor.	10:1	10 min.	45mL	12/cs	0-00-51128- <b>99432</b> -0	EPX Plus II, 10:1 plunger	45mL Square Orange
Bonds most plastics.	9		Bonds difficult surfaces such as powder coats and oily surfaces. Longer worklife.			490mL	6/cs	0-00-51128- <b>99431</b> -3	EPX 490mL Manual	490mL Square Green or Helical Orange
		<b>DP8010</b> (Blue)	Tough bonds, high impact resistance.	10:1	10 min.	45mL	12/cs	0-00-51115- <b>71600</b> -3	EPX Plus II, 10:1 plunger	45mL Square Orange
Fast cure speed. Versatile.	LSE Plastic Acrylic	<b>Lead</b> <b>Product</b>	Bonds many LSE plastics including polyolefins. Self leveling version.			490mL	6/cs	0-00-51115- <b>71601</b> -0	EPX 490mL Manual	490mL Square Green or Helical Orange
speed. V	LSE Plast	DP8010NS (Blue)	Bonds polyolefins and low surface energy materials. Non-sag. Tough bond.	10:1	10 min.	45mL	12/cs	0-00-51115- <b>81451</b> -8	EPX Plus II, 10:1 plunger	45mL Square Orange
st cure :			High impact resistance.			490mL	6/cs	0-00-51115- <b>81453-</b> 2	EPX 490mL Manual	490mL Square Green or Helical Orange
	MMA Acrylic	DP8410NS (Green)	High impact resistance. Non-sag. Adhesion to most	10:1	10 min.	45mL	12/cs	0-00-51115- <b>70994</b> -4	EXP Plus II, 10:1 plunger	45mL Square Orange
Easy use.	Acr M	Lead Product	plastics.			490mL	6/cs	0-00-51115- <b>70995</b> -1	EPX 490mL Manual	490mL Square Green or Helical Orange
	onder ic	DP8407NS (Gray)	Bonds permanently to bare metals with minimal surface prep. Non-sag.	10:1	7 min.	45mL	12/cs	0-00-76308- <b>86273</b> -2	EPX Plus II, 10:1 plunger	45mL Square Orange
	Metal Bonder Acrylic		Metal bonder			490mL	6/cs	0-00-76308- <b>86285</b> -5	EPX 490mL Manual	490mL Square Green or Helical Orange
	Urethane	DP604NS (Black)	Low temperature flexibility. Non-sag. Bonds dissimilar	1:1	4 min.	48.5mL	12/cs	0-06-38060- <b>08961</b> -3	EPX Plus II, 1:1 plunger or NEW 1:1/2:1 plunger	NEW 48.5/50mL Square Green or Helical White
	Ure	Product	substrates.			400mL	6/cs	0-00-51111- <b>98301</b> -0	EPX 200/400mL Manual	400mL Square Gold or Helical White
Flexible		DP600 (Gray)	Self-leveling concrete repair.	1:1	1 min.	48.5mL	12/cs	0-06-38060 <b>-08962</b> -0	EPX Plus II	NEW 48.5/50mL Square Green or Helical White
Fle	Semi-rigid Urethane					400mL	6/cs	0-00-51111- <b>98303</b> -4	EPX 200/400mL Manual	400mL Square Gold or Helical White
	Semi	DP600NS (Gray)	Non-sag concrete repair.	1:1	1 min.	48.5mL	12/cs	0-06-38060- <b>08964</b> -4	EPX Plus II	NEW 48.5/50mL Square Green or Helical White
						400mL	6/cs	0-00-51111- <b>98312</b> -6	EPX 200/400mL Manual	400mL Square Gold or Helical White













# **Adhesive Sealants**

Protect from the elements with these flexible bonding and sealing solutions.

#### 3M™ Polyurethane Construction Sealant 525

A single component sealant that forms the most flexible and resilient joint with excellent adhesion on most materials.

- Creates flexible seals on heavy and light precast panel expansion joints, wood, aluminum and PVC
- Cures within 24 hours under normal outside humidity;
   90-minute plus skin time
- Use for heavy and light precast panel expansion joints, joinery seams and concrete roof tiles



UPC	Size	Color	Case Qty	Units
0-00-48011- <b>62823</b> -3	300mL/10.1 fl oz	Gray	12	EA



#### 3M<sup>™</sup> Polyurethane Sealant 540



A high performance, single-component, moisture-curing sealant that forms permanently elastic bonds.

- Fast-curing adhesive offers rapid results
- High tensile strength produces high-strength bonds
- Excellent weather resistance for long-term performance



UPC	Size	Color	Case Qty	Units
0-00-21200- <b>49054</b> -5	300mL/10.1 fl oz cartridge	White	12	EA
0-00-21200- <b>41594</b> -4	300mL/10.1 fl oz cartridge	Gray	12	EA
0-00-21200- <b>41595</b> -1	300mL/10.1 fl oz cartridge	Black	12	EA



#### 3M<sup>™</sup> Adhesive Sealant 740 UV



- A single-component, elastomeric sealant that cures without isocyanates
- Seals concrete, wood, aluminum, most lacquered metals, polyester, glass, stone and ceramic
- This hybrid technology is paintable when wet and will not degrade when exposed to UV
- Low VOC, 50 minute skin time



UPC	Size	Color	Case Qty	Units
0-00-48011 <b>-62812</b> -7	290 mL cartridge	White	12	EA
0-00-48011 <b>-62813</b> -4	290 mL cartridge	Gray	12	EA
0-00-51111- <b>08024</b> -5	290 mL cartridge	Black	12	EA

# **Marine Sealants**

#### 3M<sup>™</sup> Marine Adhesive Sealant 5200

A one-part polyurethane sealant formulated to chemically react with moisture in order to provide strong, flexible bonds in a marine environment.

- Provides excellent resistance to saltwater and weathering
- Tough and flexible polyurethane polymer forms strong bonds
- Bonds dissimilar materials without shrinking
- Retains strong bond during vibration, swelling, shrinking or shock
- Offers extended working time through longer cure



UPC	Size	Color	Case Qty	Units
0-00-51135- <b>05203</b> -7	3 oz tube	White	6	TB
0-00-51135- <b>05205-</b> 1	3 oz tube	Black	6	TB
0-00-51135- <b>06500</b> -6	295mL/10 fl oz cartridge	White	12	EA
0-00-51135- <b>06501</b> -3	295mL/10 fl oz cartridge	Tan	12	EA
0-00-51135- <b>06504</b> -4	295mL/10 fl oz cartridge	Black	12	EA










#### 3M™ Marine Adhesive Sealant 5200 Fast Cure\*

A one-part polyurethane formulated for applications Permanent Bonding 24 hour Cur where a fast, long-term seal is required for above or below the waterline.

- Fast-curing adhesive sealant that is tack-free in 1 hour; cures within 24 hours
- · Provides excellent resistance to saltwater and weathering
- Tough and flexible polyurethane polymer forms strong bonds
- Retains strong bonds during vibration, swelling, shrinking or shock
- Designed to bond dissimilar materials without shrinking

		3M
	3M	Name of
	MALANT.	
September 1	BROOK CUMB	The same
MI ELM	-	100
	THE REAL PROPERTY.	
	man.	
	1000	Parishin.
-		
	MIS Helle	4

UPC	Size	Color	Case Qty	Units
0-00-51135- <b>05220</b> -4	3 oz. Tube	White	12	TB
0-00-51135- <b>06520</b> -4	295mL/10 fl oz cartridge	White	12	EA



#### 3M™ Marine Adhesive Sealant 4000 UV\*



A one-part adhesive sealant that cures to form a firm, rubbery and waterproof seal, making it well-suited for marine applications above or below the waterline.

- Forms very high strength seal for durability
- Excellent UV resistance for glazing applications
- Low VOC for more environmentally sustainable product
- 20 minute skin time helps keep jobs moving quickly

UPC	Size	Color	Case Qty	Units
0-00-51135- <b>05280</b> -8	3 oz tube	White	6	EA
0-00-51135- <b>06580</b> -8	295mL/10 fl oz cartridge	White	12	EA

\*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.










A single component, silane terminated polymer (STP) sealant that works on concrete, wood, aluminum, most lacquered metals, polyester, glass, stone, ceramic and more.

- · Paintable when wet
- Will not degrade when exposed to UV
- Isocyanate free



#### 3M™ Marine Grade Silicone Sealant\*

A high-quality, one-component cure, silicone sealant designed for the harsh marine environment.

- Mildew and high-temperature resistant to provide a durable and long-lasting seal
- Non-shrinking and non-sagging properties provide simple and efficient application
- · Permanently elastic design features long-lasting flexibility



UPC	Size	Color	Case Qty	Units
0-00-51135- <b>08027</b> -6	295mL/10 fl oz cartridge	White	12	EA
0-00-51135- <b>08029</b> -0	295mL/10 fl oz cartridge	Clear	12	EA

#### 3M<sup>™</sup> Manual Applicator 310M

A high-quality, manual-driven applicator designed to dispense adhesive sealants in cartridges.

- Features a 18:1 mechanical advantage
- All-metal construction for durability
- · Offers fast metering, mixing and application of adhesives
- Mobile design provides convenient and portable adhesive application

UPC	Case Qty
0-00-48011- <b>62830</b> -1	1 per Case

### 3M<sup>™</sup> Pneumatic Applicator 34A

A high quality pneumatic applicator designed for dispensing cartridges for 290, 295, 300, 310mL and 400mL sausage packs. 120 PSI rated.

- Variable flow control
- 3 piece telescoping piston

UPC	Case Qty
0-00-48011- <b>62834</b> -9	1 per Case






# **Fire Barrier Solutions**

3M is proud to be the industry leader in firestopping materials. Our dedication to stringent testing and code developments help make buildings safer today than they were even 10 years ago. You can trust the 3M brand for proven reliability and outstanding service.

# **Fire Barrier Sealants**

#### 3M<sup>™</sup> Fire Barrier\* Sealant IC 15WB+

A one-part, gun-grade, intumescent firestop sealant that forms a monolithic seal after drying, CPVC compatible and bonds to concrete, metals, wood, plastic and cable jacketing.



- Designed to help minimize sound transfer
- Water-based and paintable sealant provides easy application and clean-up
- Sag-resistant properties offer clean application as well as strong adhesion



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>16557</b> -3	Cartridge 10.1 fl oz	Yellow	12	CQ
0-00-51115- <b>16560</b> -3	Sausage Pack 20 fl oz	Yellow	10	EA
0-00-51115- <b>16558</b> -0	Pail 4.5 gallon	Yellow	1	PA





#### 3M<sup>™</sup> Fire Barrier Sealant CP 25WB+\*



Our most popular latex-based intumescent firestop sealant with more than 600 tested and listed systems. Dries to a red color, no mixing required.

- Superior adhesion bonds to concrete, metals, wood, plastic and cable jacketing
- Extensive library of UL Classified fire protection systems
- Intumescent expands when heated to seal around items exposed to fire
- Low VOC meets the intent of LEED NC-EQ Credit 4.1 for Low-Emitting Materials – contains <250 g/L VOC content (less H20 and exempt solvents)</li>



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>11638</b> -4	Cartridge 10.1 fl oz	Red	12	CQ
0-00-51115- <b>11641</b> -4	Cartridge 27 fl oz	Red	6	CQ
0-00-51115- <b>11642</b> -1	Sausage Pack 20 fl oz	Red	10	EA
0-00-51115- <b>11639</b> -1	Pail 2 gallon	Red	1	PA
0-00-51115- <b>11640</b> -7	Pail 5 gallon	Red	1	PA









#### 3M<sup>™</sup> Fire Barrier Rated Foam FIP 1-Step\*

New technology enables this firestop foam to expand up to 5 times in volume after dispensing, This intumescent foam is used to fill the annular space created by pipes and cables penetrating through fire-rated construction.

- Firestop tested up to 2 hours in accordance with ASTM E 814 (UL 1479) and CAN/ULC S115
- Expands up to 5X when dispensed. One cartridge FIP 1-Step equals up to 6 tubes of 10.1 oz. caulk cartridges
- Expansive UL systems for blank openings, metal pipe, cables, cable trays, combos, insulated pipe
- Excellent adhesion. Can be installed in wall or floor applications with no backing material
- Meets the intent of LEED VOC regulations, <250 g/L VOC contents (less H20 and exempt solvents)


UPC	Size	Color	Case Qty	Units
0-00-51115- <b>54925</b> -0	Cartridge 12.85 fl oz	Red	6	CQ


Dispensing	UPC	Packaging	Case Qty	Units
HandyMax® HMS-G4C2 Manually-operated Dispenser	0-00-51115- <b>54927</b> -4	1	1	EA
PowerMax® HPS-4C2 Battery-operated Dispenser	0-00-51115- <b>54928</b> -1	1	1	EA
Replacement Nozzles	0-00-51115- <b>54933</b> -0	12/bag; 5 bags/case	60	BG

# **Through-Penetration Sealants**

#### 3M<sup>™</sup> Fire Barrier Sealant FD 150+\*

This halogen-free sealant is sag-resistant and has an excellent caulk rate. It dries to the touch in 30–60 minutes and can be painted.





- Continuous seal remains pliable and allows for typical pipe movement
- Water-based for easy installation, cleanup and disposal
- High-solids formula means limited shrinkage












F56 In STC 56-Rated Wall Assembly







UPC	Size	Color	Case Qty	Units
0-00-51115- <b>18812</b> -1	Cartridge 10.1 fl oz	Red	12	CQ
0-00-51115- <b>18810</b> -7	Sausage Pack 20 fl oz	Red	12	EA
0-00-51115- <b>18811</b> -4	Cartridge 28 fl oz	Red	6	CQ
0-00-51115- <b>18813</b> -8	Pail 4.5 gallon	Red	1	PA
0-00-51115- <b>16564</b> -1	Cartridge 10.1 fl oz	Limestone	12	TB
0-00-51115- <b>16567</b> -2	Sausage Pack 20 fl oz	Limestone	12	EA
0-00-51115- <b>16565</b> -8	Pail 4.5 gallon	Limestone	1	PA
0-00-51115- <b>11574</b> -5	Cartridge 10.1 fl oz	Blue	12	TB
0-00-51115- <b>11634</b> -6	Sausage Pack 20 fl oz	Blue	12	EA
0-00-51115- <b>11602</b> -5	Cartridge 28 fl oz	Blue	6	CQ
5-00-51115- <b>11575</b> -7	Pail 4.5 gallon	Blue	1	PA

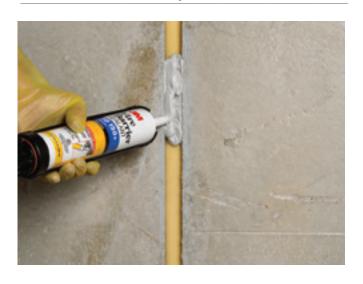







# Through-Penetration Sealants (cont.)

#### 3M<sup>™</sup>Fire Barrier Silicone\* Sealant 2000+

An elastomeric, ready-to-use, single-component, neutral-cure silicone sealant that cures upon exposure to atmospheric humidity. Forms a flexible firestop seal that also acts as a barrier to airborne sound transmission.





- Provides optimum adhesion to a wide variety of construction materials
- Excellent weatherability during construction













UPC	Size	Color	Case Qty	Units
0-00-51115- <b>11558</b> -5	Cartridge 10.3 fl oz	Lt Gray	12	CQ
5-00-51115- <b>11559</b> -7	Pail 4.5 gallon	Lt Gray	1	PA

# **Through-Penetration Water Tight Sealants**

#### 3M™Fire Barrier Water Tight\* Sealant 3000 WT

A high-performance, intumescent silicone firestop that also acts as a barrier to water leakage and airborne sound transmission.

- Up to 4-hour fire ratings per ASTM E 814 (UL 1479)
- Excellent weatherability ideal for fast track construction
- Cures upon exposure to atmospheric humidity
- Fungal growth inhibited in the product per ASTM G 21

















UPC	Size	Color	Case Qty	Units
0-00-51115- <b>16593</b> -1	Cartridge 10.1 fl oz	Gray	12	CQ
0-00-51115- <b>18788</b> -9	Sausage Pack 20 fl oz	Gray	12	EA
5-00-51115- <b>16594</b> -3	Pail 4.5 gallon	Gray	1	PA

#### 3M™ Fire Barrier Water Tight Sealant 1003 SL\*

A self-leveling silicone sealant firestop that creates a flexible seal and resists moisture across floors and other horizontal surfaces.

- Up to 3-hour fire ratings for ioint systems per ASTM E 1966 (UL 2079)
- Up to 3-hour fire ratings for through penetrations per ASTM E 814 (UL 1479)
- of +31% of original joint width



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>11538</b> -7	Cartridge 10.1 fl oz	Lt Gray	12	CQ
0-00-51115- <b>18789</b> -6	Sausage Pack 20 fl oz	Lt Gray	12	EA
0-00-51115- <b>11540</b> -5	Pail 4.5 gallon	Lt Gray	1	PA

#### 3M™ Fire Barrier Water Tight Sealant 1000 NS\*

This non-slump firestop sealant was designed as a re-enterable and repairable solution primarily used on vertical surfaces.

- Up to 3-hour fire ratings for joint systems per ASTM E 1966 (UL 2079)
- Up to 3-hour fire ratings for through penetrations per ASTM E 814 (UL 1479)
- Compression/extension recovery of + 31% of original joint width



UPC	Size	Color	Case Qty	Units
0-00-51115- <b>11535</b> -6	Cartridge 10.1 fl oz	Lt Gray	12	CQ
0-00-51115- <b>18790-</b> 2	Sausage Pack 20 fl oz	Lt Gray	12	EA
0-00-51115- <b>11537</b> -5	Pail 4.5 gallon	Lt Grav	1	PA

### 3M<sup>™</sup> Firestop Identification Label

Adhesive-backed, bright red label for easy identification of through penetration or joint firestop systems in fire-rated construction.



UPC	Size	Case Qty	Units	Labels per roll
0-00-51115- <b>54917</b> -5	3 in x 5 in	4	RL	250







## **Through-Penetration Devices and Kits**

### 3M<sup>™</sup> Fire Barrier Ultra Plastic Pipe Device

A one-piece, metal collar assembly that makes installation fast and easy.

- Firestop up to 6" non-metallic pipe in new and retrofit installations
- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Proven technology Intumescent action quickly seals around the penetrating item in a fire









UPC	Prod ID	Size	Case Qty	Units
0-00-51115- <b>08378</b> -5	PPD1.5	1.5 in	10	EA
0-00-51115- <b>08379</b> -2	PPD2	2 in	10	EA
0-00-51115- <b>08380</b> -8	PPD3	3 in	10	EA
0-00-51115- <b>08381</b> -5	PPD4	4 in	10	EA

### 3M<sup>™</sup> Fire Barrier Putty Sleeve Kits\*

Kit allows for both new and retrofit data and telecom cable firestop installations. Ideal for high traffic cable penetrations.











UPC	Product ID	Size	Case Qty	Units
0-00-51115- <b>18809</b> -1	DT100	1 in	1	KT
0-00-51115- <b>18808</b> -4	DT200	2 in	1	KT
0-00-51115- <b>18806</b> -0	DT400	4 in	4	KT

### 3M™ Ultra Fast Anchors UFA-16

These unique anchor straps replace the need for power tools, mounting screws, washers and other fasteners—all you need are pliers.

- Used in up to 12" concrete or 12" gypsum floor or wall assemblies
- Takes about one minute to install

UPC	Size	Case Qty	Units
0-00-51115- <b>11530</b> -1	16 in	400	EA









These pre-formed foam blocks are used in conjunction with 3M™ Fire Barrier





4 in. Round

- Effectively seal larger openings against smoke, toxic gas and flame
- Help reduce sound transmission
- Easy to install

Pass-Through Devices.

UPC	Size	Case Qty	Units
0-00-51115- <b>18791</b> -9	4 in round	24	EA
0-00-51115 <b>-18793</b> -3	2 in round	24	EA
0-00-51115- <b>18794</b> -0	4 in square	24	EA

## 3M™ Fire Barrier Pass-Through Devices Use with Mounting Brackets

One-piece hinged metal enclosures designed to prevent the passage of fire, smoke and toxic gas.

- Cable management solution for electrical, data and communication applications
- Fast and easy installation
- Up to 4-hour fire rating per ASTM E 814 (UL 1479)

Use with Mounting Brackets shown below.



Size	Case Qty	Units
SEE OF DIRECT LOSS	THE RESIDENCE DIRECTOR THE RESIDENCE DIRECTOR THE	W CANADA.

UPC	Size	Case Qty	Units
0-00-51115- <b>18773</b> -5	2 in Round	6	EA
0-00-51115- <b>16598</b> -6	4 in Round	6	EA
0-00-51115- <b>16597</b> -9	4 in Square	6	EA

### 3M™ Fire Barrier Pass-Through Mounting Brackets

Used in conjunction with 3M™ Fire Barrier

Pass-Through

Devices, these metal brackets support and strengthen firestop through penetration installations. Brackets come in pairs for securing the device on each side of the floor or wall assembly.

UPC	Size	Case Qty	Units
0-00-51115- <b>18774</b> -2	2 in Round Single Mount (Pair)	24	PR
0-00-51115- <b>18754</b> -4	4 in Round Single Mount (Pair)	24	PR
0-00-51115- <b>18752</b> -0	4 in Square Single Mount (Pair)	24	PR
0-00-51115- <b>18753</b> -7	4 in Square Triple Mount (Pair)	24	PR
0-00-51115- <b>18777</b> -3	4 in Square Sixplex Mount (Pair)	6	PR



## **Through-Penetration Specialty Products**

### 3M™ Fire Barrier Packing Material PM4\*

An easy-to-dispense, non-asbestos, inorganic material designed to be used as an alternative packing material to mineral wool, fiberglass and backer rod.

- · Convenient, hand-tear dispensing
- · Excellent strength and flexibility characteristics
- Meets ASTM C 1338 Standard Test Method for determining fungi resistance of insulation materials and facings



UPC	Size	Case Qty	Units
0-00-51115- <b>18764</b> -3	1/2 in thick x 4 in wide x 20.5 ft long	5	RL

### 3M<sup>™</sup> Fire Barrier **Self-Locking Pillows**

Self-contained firestops ideal for medium to large through penetrations. Intumescent fire-rated pillows are designed to expand during a fire, locking themselves around vital components.



- Easy to install, remove and reconfigure to help save time and labor
- No wire mesh or additional support required
- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Available in multiple sizes and can be cut for precise fill and compression

UPC	Prod ID	Size	Case Qty	Units
5-00-51115- <b>16578</b> -3	FB249SL	2 in x 4 in x 9 in	24	EA
5-00-51115- <b>16579</b> -0	FB269SL	2 in x 6 in x 9 in	16	EA
5-00-51115- <b>16580</b> -6	FB369SL	3 in x 6 in x 9 in	20	EA

#### 3M<sup>™</sup> Fire Barrier Pillows

Self-contained, intumescent products designed for use in through-penetration firestops



- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Re-enterable and re-useable for new or retrofit installations
- Graphite-free composition does not conduct electricity
- No wire mesh required and easy to install, inspect, remove and reuse as needed
- · Excellent aging properties for long-lasting durability and performance





UPC	Prod ID	Size	Case Qty	Units
0-00-51115- <b>16530</b> -6	FB249	2 in x 4 in x 9 in	24	EA
0-00-51115- <b>16531</b> -3	FB269	2 in x 6 in x 9 in	16	EA
0-00-51115- <b>16532</b> -0	FB369	3 in x 6 in x 9 in	20	FA

### 3M<sup>™</sup> Fire Barrier Blocks, Plugs and Planks

Stack, seal, done fire barrier products-no special tools needed. They're designed for easy installation, effectively sealing larger openings against smoke, toxic gas and flame.




- Fits medium to large openings in wall and floor through-penetrations
- · Easy trim material achieves a tight fit
- No cure time for faster completion
- Paintable with primer



UPC	Size	Case Qty	Units
	3M™ Fire Barrier Block B258		
0-00-76308- <b>97939</b> -3	2.36 in x 5.12 in x 8 in	12	Block
	3M™ Fire Barrier Plank PK39		
0-00-76308- <b>98231</b> -7	39.37 in x 5.12 in x 2.36 in	3	Plank
	3M™ Fire Barrier Plug PLG2		
0-00-76308- <b>98126</b> -6	2" diameter	4	Plug
	3M <sup>™</sup> Fire Barrier Plug PLG4		
0-00-76308- <b>98203</b> -4	4" diameter	4	Plug

### 3M<sup>™</sup> Fire Barrier Composite Sheet CS-195+



A thin, one-part composite system designed to firestop blank openings and larger penetrations such as cable trays and conduit and HVAC ductwork through rated construction.

- Up to 4-hour fire ratings per ASTM E 814
- Thermally conductive, allowing unwanted heat build-up to escape
- Re-enterable for new or retrofit installations
- Easy to install using common trade tools, cut and form to desired shape



UPC	Size	Case Qty	Units
0-00-51115- <b>07437</b> -0	16 in x 28 in, Boxed	1	EA
0-00-51115- <b>08260-</b> 3	28 in x 52 in, Boxed	1	EA
0-00-51115- <b>07220</b> -8	36 in x 24 in, Boxed	1	EA
0-00-51115- <b>07222</b> -2	36 in x 36 in, Boxed	1	EA
0-00-51115- <b>07224</b> -6	36 in x 41 in, Boxed	1	EA







### 3M<sup>™</sup> Fire Barrier Moldable Putty Stix MP+\*

A one-part, ready-to-use, re-enterable, intumescent putty that can be easily formed to firestop through penetrations and blank openings in fire-rated assemblies. Often used to fill voids in large openings and/or complex firestop systems.

- Up to 4-hours fire ratings per ASTM E 814 (UL 1479)
- Provides draft and cold smoke seal
- Helps reduce noise transfer (STC-Rating of 56 when tested in STC 56-rated wall assembly)
- Noncorrosive to metal and compatible with synthetic cable jackets
- Will not dry out or crumble, re-enterable











UPC	Size	Case Qty	Units
0-00-51115- <b>16526</b> -9	1.4 in x 11 in, Sticks	10	EA
0-00-51115- <b>16561</b> -0	1.45 in x 6 in, Sticks	12	EA

### 3M<sup>™</sup> Fire Barrier Moldable Putty Pads MPP+\*

A one-part firestop material used in various fire-rated assemblies, such as electrical box protection and wall openings.

Ready to use in convenient, thick pads.





Excellent adhesion to a wide range of construction materials











UPC	Size		Units
0-00-51115- <b>16508</b> -5	4 in x 8 in, Pads	10	PD
0-00-51115- <b>16510</b> -8	9.5 in x 9.5 in, Pads	20	PD

#### 3M<sup>™</sup> Fire Barrier Mortar\*

A cost-effective, lightweight, cementitious firestop with variable mix ratios for use in through penetration applications. Excellent adhesion—bonds to concrete, metals, wood, plastic and cable jacketing.

- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- · Halogen-free formula
- · Water clean up



	UPC		Case Qty	Units	
0-00-51	115- <b>54901</b> -4	5 gallon	1	PA	
0-00-51	115- <b>54900</b> -7	44 lb. Bag	1	BG	

#### \*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.





## **Fire Barrier Tapes**

Fire, Water, Smoke & Sound

Another market first. This barrier tape technology offers convenience and fast installation. No tools needed, no sprayers to clean or repair, no mess, less hassle. They're tested and listed with both UL and Intertek to ASTM E2307, E1966 and E814, and they meet the International Building Code.

### 3M™ Fire and Water Barrier Tape\*

For sealing perimeter joints (curtain wall joints) and other construction joints as well as some through-penetration applications.

- Great for water protection: meets UL Water Leakage Test. W Rating—Class requirement; passed ASTM D 6904 Rain Resistance Test.
- Up to 4-hour fire protection in construction joints; ASTM E1966/UL 2079
- Up to 3-hour fire protection in perimeter joints; ASTM E2307
- Up to 2-hour fire protection in throughpenetration applications; ASTM E814/UL 1479



UPC	Size	Case Qty	Units
0-00-76308- <b>86899</b> -4	2 in x 75 ft (51 mm x 22.8m)	24	RL
0-00-76308- <b>86900</b> -7	4 in x 75 ft (101 mm x 22.8m)	12	RL
0-00-76308- <b>86901</b> -4	8 in x 75 ft (202 mm x 22.8m)	4	RL
0-00-76308- <b>86902</b> -1	12 in x 75 ft (303 mm x 22.8m)	4	RL



### 3M™ Smoke and Sound Tape\*

Provides a smoke and sound seal for construction joints and throughpenetration in non-fire rated wall and floor assemblies, including smoke partitions and acoustic assemblies. When installed

properly, this material provides a smoke seal to mitigate the spread of smoke and toxic gas as well as help reduce the transmission of sound.

UPC	Size	Case Qty	Units
0-00-76308- <b>86903</b> -8	2 in x 75 ft (51 mm x 22.8m)	24	RL
0-00-76308- <b>86936</b> -6	4 in x 75 ft (101 mm x 22.8m)	12	RL
0-00-76308- <b>86937</b> -3	8 in x 75 ft (202 mm x 22.8m)	4	RL

12 in x 75 ft (303 mm x 22.8m)





0-00-76308-86938-0

RI

## Flexible Wraps

Flexible solutions for the protection of grease ducts, ventilation air ducts, return air plenums, emergency circuits, structural steel and more. These flexible wrap products make installation easy, even around corners. Ideal for use in a wide variety of commercial and industrial applications.

### 3M<sup>™</sup> Fire Barrier Duct Wrap 615+

The only fire-rated duct wrap product you'll need to help protect both grease ducts and air ducts, in an easy to install format.

- Lightweight (6 lbs per cu ft) and thin (1.5" in accordance with the tolerances in ASTM C 892) for easier application
- 2-hour fire protection
- Third-party certified to ASTM E 2336 (grease duct test standard) and ISO 6944 (air duct test standard)
- Tested and listed with UL and Intertek, meets IBC, IMC, UMC, NFPA and other key life safety codes
- Listed by California State Fire Marshal (Listing No. 2440-0941:5555)
- Supports maximum temperatures of up to 2192°F (1200°C)
- Apply in 2 layers for grease ducts, 1 layer for air ducts



UPC	Size	Case Qty	Units
0-00-51115- <b>54906</b> -9	48 in x 25 ft	1	RL
0-00-51115- <b>54905</b> -2	24 in x 25 ft	1	RL
0-00-51115- <b>18804</b> -6	1.5 in x 6 in x 25 ft	4	Collar





### 3M<sup>™</sup> Fire Barrier Plenum Wrap 5A+

Applied 1-layer thick, this wrap creates a fire-resistant enclosure that can reduce the flame spread and smoke spread ratings to acceptable levels for return air plenums. It is tested to UL 910 (NFPA 262), UL 1887, and ASTM E 84.



UPC	Size	Case Qty	Units
0-00-51115- <b>18802</b> -2	24 in x 50 ft (0.5 in thick)	1	RL
0-00-51115- <b>18805</b> -3	48 in x 25 ft (0.5 in thick)	2	RL



### 3M<sup>™</sup> Venture Tape<sup>™</sup> FSK\* Facing Tape 1525CW

For use with Duct Wrap 615+ and Plenum Wrap 5A+

Foil/kraft lamination coated with a cold weather acrylic pressure sensitive adhesive.

- UL723 Classified (5/10 Flame/Smoke Rating)
- ASTM C1136, Type II and IV
- Tri-directional reinforcement



UPC	Packaging	Size	Color	Case Qty	Units
0-07-50351- <b>50014</b> -7	Ind. Labeled	48 mm x 45.7 m	Natural Aluminum	24	RL
0-07-50351- <b>15253</b> -7	Ind. Labeled	72 mm x 45.7 m	Natural Aluminum	16	RL
0-07-50351- <b>50015</b> -4	Ind. Labeled	99 mm x 45.7 m	Natural Aluminum	12	RL







### 3M<sup>™</sup> Interam<sup>™</sup> Endothermic Mat E-5A-4

Flexible mat with endothermic technology that, when exposed to high temperatures or flame, releases chemically bound water to slow heat transfer and help protect critical electrical and structural components from fire. Non-flame supporting, low-smoke evolution and fast installation make this an excellent fire barrier for structural steel and electrical circuitry.

- ASTM E 84 (UL 723) Surface Burning Characteristics of Building Materials
- ASTM E 119 (UL 263) Fire Tests of Buildin Construction and Materials
- ASTM E 1529 (UL 1709) Determining Effects of Large Hydrocarbon Pool Fires or Structural Members and Assemblies
- ASTM E 1725 Fire Tests of Fire-Resistive Barrier Systems for Electrical System Components
- NBN 713-20/ISO TC 92 Simulated Jet-Fire Test

er	21 31 41
ng	AND THE PROPERTY OF THE PROPER
on ;	100 100 100 100 100 100 100 100 100 100
	SEE VALUES THE CORRESPONDE TO SEE SEE SEE SEE SEE SEE SEE SEE SEE SE

UPC	Size	Case Qty	Units
0-00-51115- <b>54913</b> -7	2/5 in. thick x 24.5 in wide x 20 ft long	1	RL




Wraps easily around existing structures. Multiple layers can be applied, allowing you to tailor the amount of fire protection required.



### 3M<sup>™</sup> Aluminum Foil Tape 425 Most Versatile Aluminum Tape

Use this versatile tape to seal the cut edges on 3M<sup>™</sup> Interam<sup>™</sup> Endothermic Mat E-5A-4.

- Thermally conductive tape helps dissipate heat and improves heating and cooling efficiency to protect temperature sensitive materials
- Resistant to chemicals to protect surfaces during de-paint process and other chemical masking operations
- Highly engineered acrylic adhesive provides long term durability
- Heat and light reflective tape protects surfaces and enhances lighting efficiency
- Withstands exposure to flame, weathering, moisture and UV
- Dead soft aluminum foil backing conforms to curved and uneven surfaces
- Recognized by UL to UL 746C and Classified by UL to UL 723, Class "L" for low flammability rating







4.6 m











UPC	Size	Color	Case Qty	Units
0-00-51115- <b>18797</b> -1	5 gallon pail	Dark Gray	1	PA
0-00-51115- <b>18798</b> -8	5 gallon pail	Red	1	PA

## **Construction Joint Spray**

### 3M™ FireDam™ Spray 200\*

Sprayable coating is a quick and easy method for firestopping fire rated construction joints, including head-of-wall, wall-to-wall, floor-to-floor and perimeter joints.

- Up to 4-hour fire ratings for joint systems per ASTM E 1966 (UL 2079)
- Up to 2-hour fire ratings for through penetrations per ASTM E 814 (UL 1479)
- Elastomeric forms a flexible seal with compression/extension of up to +50% of nominal joint width
- High coverage rate reduces installation time
- Fast-drying, low-sag formula
- Applied with conventional airless spray equipment
- Paintable when cured
- · Easy clean up with water







## Scotch® Box Sealing Tapes

### High tack. High performance.

Scotch® Box Sealing Tapes offer 3M's very best performance in packaging tapes. They are made with an abrasion-resistant, polyester backing that resists moisture and scuffing. These tapes also offer high edge-tear and split resistance.

### Choosing the Best Tape for your Application

### Step 1. Select Tape Backing

Scotch® and Tartan™ Box Sealing Tapes offer backing choices for specific performance properties:

#### Polyester

- Strongest backing
- · Excellent abrasion resistance
- Moisture and chemical resistance
- Highest temperature resistance
- Transparency

### Polypropylene

- Strong backing
- Good abrasion resistance
- Good conformability
- Most economical
- Transparency

### Step 2. Select Tape Adhesive

With the Scotch® and Tartan™ Box Sealing Tapes you have two choices of pressure sensitive adhesive, each with a different combination of properties. Both seal cartons reliably without the mess, dwell time and equipment maintenance of hot melt adhesive.

### Synthetic Rubber (Hot Melt)

- Excellent holding power
- Good initial adhesion above 40°F

### Acrylic

- Excellent initial adhesion over a broad temperature range
- Extremely long performance life
- UV and chemical resistance


### **Problem Solving Solutions**



Easy unwind and high initial adhesion of Scotch® Box Sealing Tapes reduce tabbing downtime and rework.



Initial adhesion and subsequent holding power of Scotch® Box Sealing Tapes resist popping for secure sealing throughout a supply chain.



Scotch® Box Sealing Tapes close securely without the holes, waste, appearance, sharp points and disposal of staples.



Scotch® Box Sealing Tapes resist moisture encountered in storage and shipping through the supply chain.

### Performance levels to match your job

		TAPE BACKING TAPE ADHE		TAPE BACKING		HESIVE	
PRODUCT		Total mils	Backing mils	Polyester	Poly- propylene	Synthetic Rubber (Hot Melt)	Acrylic
Go To	371	1.8	1.2		•	•	
Tapes	311+	2.05	1.1		•		•
	375	3.1	2.0		•	•	
High	373	2.5	1.6		•	•	
Performance	355	3.43	2.0	•		•	
Tapes	353	1.9	1.0	•		•	
	351	3.43	2.0	•		•	
General Use Tape	369	1.6	1.0		•	•	
Pagyalad	3073	2.6	1.6		•	•	
Recycled Corrugate Tapes	3071	2.1	1.2		•	•	










Acrylic

## **GO-TO Packaging Tapes**

### Scotch® Box Sealing Tape 371


An economical and reliable, medium duty sealing tape popular with manufacturers of food and beverages, sporting goods, piping, metal fabrications, automotive parts and furniture. Securely closes regular slotted containers (RSC) and packages used for moving, shipping and distribution.



 Tape resists nicks, abrasions, moisture and scuffing for long lasting hold

- Backing conforms around edges and rough areas for a tight seal
- Resists edge tears and splits to help keep contents secure


UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>13679</b> -5	Bulk	48 mm x 50 m	Clear	36	RL
*0-00-51115- <b>68802</b> -7	6 Rolls per Labeled Pack	48 mm x 50 m	Clear	6	PH
0-00-21200- <b>15873</b> -5	Bulk	48 mm x 100 m	Clear	36	RL
0-00-21200- <b>19279</b> -1	Bulk	72 mm x 50 m	Clear	24	RL
0-00-21200- <b>19280</b> -7	Bulk	72 mm x 100 m	Clear	24	RL
*0-00-51115- <b>68803</b> -4	6 Rolls per Labeled Pack	72 mm x 50 m	Clear	4	PH
0-00-21200- <b>14105</b> -8	Bulk	48 mm x 50 m	Tan	36	RL
*0-00-51115- <b>68801</b> -0	6 Rolls per Labeled Pack	48 mm x 50 m	Tan	6	PH
0-00-21200- <b>15872</b> -8	Bulk	48 mm x 100 m	Tan	36	RL
*0-00-51115- <b>68798</b> -3	6 Rolls per Labeled Pack	48 mm x 100 m	Tan	6	PH
0-00-21200- <b>18197</b> -9	Bulk	72 mm x 50 m	Tan	24	RL
*0-00-51115- <b>68797</b> -6	6 Rolls per Labeled Pack	72 mm x 50 m	Tan	4	PH
0-00-21200- <b>61525-</b> 2	Bulk	72 mm x 100 m	Tan	24	RL



### Scotch® High Tack Box Sealing Tape 311+

Hot Melt

Offers excellent performance over broad temperature ranges, specifically in colder and damper applications. Use for box sealing, splicing, recouperage and other demanding packaging applications.



- Can be applied at freezer and refrigeration temperatures of 20°F to 50°F (-6.6°C to 10°C)
- Once applied, performs well on fiberboard boxes subjected to temperatures below 32°F (0°C)

UPC	Packaging	Size	Color	Case Qty	Units
0-00-76308- <b>86493</b> -4	Bulk	48 mm x 100 m	Clear	36	RL
0-00-76308- <b>86494</b> -1	Bulk	72 mm x 100 m	Clear	24	RL



\*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.





## **High Performance Tapes**

### Scotch® Box Sealing Tape 375

The very best performer in the Scotch brand packaging tape line. The tape's high strength, combined with its quick stick and resistance to splitting or tearing, makes it popular for overseas and export shipping.

- Ideal for tightly sealing over-packed and heavy-weight packages
- Adhesive sticks to a variety of surfaces on contact, including recycled content



MRO Best Seller

3.1 mil Hot Melt

- Backing resists nicks, abrasions, moisture and scuffing for lasting hold
- Easily conforms around edges and on rough surfaces for a tight seal

UPC	Packaging	Size Color		Case Qty	Units
0-00-21200- <b>72406</b> -0	Bulk	48 mm x 50 m	Clear	36	RL
0-00-21200- <b>72407</b> -7	Bulk	72 mm x 50 m	Clear	24	RL
*0-00-51115- <b>68764</b> -8	Ind. Labeled	48 mm x 50 m	Clear	36	RL
* 0-00-51115- <b>68765</b> -5	Ind. Labeled	72 mm x 50 m	Clear	24	RL
0-00-21200- <b>72401</b> -5	Bulk	48 mm x 50 m	Tan	36	RL
0-00-21200- <b>72402</b> -2	Bulk	72 mm x 50 m	Tan	24	RL
* 0-00-51115- <b>68762</b> -4	Ind. Labeled	48 mm x 50 m	Tan	36	RL
* 0-00-51115- <b>68763</b> -1	Ind. Labeled	72 mm x 50 m	Tan	24	RL



### Scotch® Box Sealing Tape 373

Securely closes double and triple walled corrugated cartons, including those with high recycled content, saving time and reducing closure failures. Suitable for use on large cartons, shipped individually.

- Adhesive sticks quickly to a variety of materials, including corrugated fiberboard
- Bonds instantly and resists tearing and splitting for added security
- High performance tape resists nicks, abrasions, moisture and scuffing
- Conformable backing ensures a tight seal around corners and rough areas



2.5 mil Hot Melt

	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>72366</b> -7	Bulk	36 mm x 50 m	Clear	48	RL
	0-00-21200- <b>72368</b> -1	Bulk	48 mm x 50 m		36	RL
	0-00-21200- <b>69605</b> -3	Bulk	72 mm x 50 m	Clear	24	RL
	0-00-21200- <b>73079</b> -5	Bulk	48 mm x 100 m	Clear	36	RL
	0-00-21200- <b>73080</b> -1	Bulk	72 mm x 100 m	Clear	24	RL
*	0-00-51115- <b>68786</b> -0	Ind. Labeled	48 mm x 50 m	Clear	36	RL
*	0-00-51115- <b>68783</b> -9	Ind. Labeled	48 mm x 100 m	Clear	36	RL
*	0-00-51115- <b>68781</b> -5	Ind. Labeled	72 mm x 50 m	Clear	24	RL
*	0-00-51115- <b>68785</b> -3	Ind. Labeled	72 mm x 100 m	Clear	24	RL
	0-00-21200- <b>72385</b> -8	Bulk	48 mm x 50 m	Blue	36	RL
*	0-00-51115- <b>68792</b> -1	Ind. Labeled	48 mm x 50 m	Blue	36	RL
	0-00-21200- <b>72397</b> -1	Bulk	48 mm x 50 m	Green	36	RL
	0-00-21200- <b>72359</b> -9	Bulk	48 mm x 50 m	Tan	36	RL
	0-00-21200- <b>72361</b> -2	Bulk	72 mm x 50 m	Tan	24	RL
	0-00-21200- <b>73081</b> -8	Bulk	48 mm x 100 m	Tan	36	RL
	0-00-21200- <b>73082</b> -5	Bulk	72 mm x 100 m	Tan	24	RL
*	0-00-51115- <b>68795</b> -2	Ind. Labeled	48 mm x 50 m	Tan	36	RL
*	0-00-51115- <b>68780</b> -8	Ind. Labeled	72 mm x 50 m	Tan	24	RL
	0-00-21200- <b>72381</b> -0	Bulk	48 mm x 50 m	Red	24	RL
	0-00-21200- <b>72389</b> -6	Bulk	48 mm x 50 m	White	36	RL
*	0-00-51115- <b>68791</b> -4	Ind. Labeled	48 mm x 50 m	White	36	RL
*	0-00-51115- <b>68789</b> -1	Ind. Labeled	48 mm x 50 m	Orange	36	RL
-			<del></del>			





### Scotch® Box Sealing Tape 355

This tape withstands score line breaking and center seam splitting, making it ideal for use in heavy duty box and carton sealing operations.

- Extra sturdy polyester backing resists abrasion, moisture and scuffing for lasting hold
- Adhesive sticks quickly to a variety of materials, including those with high recycled content
- Securely closes double and triple walled corrugated cartons and fiberboard
- Provides high quality, consistent performance with easy unwind

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>72330</b> -8	Bulk	48 mm x 50 m	Clear	36	RL
0-00-21200- <b>72331</b> -5	Bulk	72 mm x 50 m	Clear	24	RL
<b>*</b> 0-00-51115- <b>68752</b> -5	Ind. Labeled	36 mm x 50 m	Clear	48	RL
<b>*</b> 0-00-51115- <b>68756</b> -3	Ind. Labeled	48 mm x 50 m	Clear	36	RL
<b>*</b> 0-00-51115- <b>68751</b> -8	Ind. Labeled	72 mm x 50 m	Clear	24	RL
<b>*</b> 0-00-51115- <b>68755</b> -6	Ind. Labeled	48 mm x 50 m	Tan	36	RL

## Scotch® Box Sealing Tape 353

This tape is suitable for use on single and double walled corrugated boxes, including those with high recycled content. It complies with environmental considerations of ASTM D1974-92 and meets CID A-A-1684.

- Built tough to resist score line breaking and center seam splitting
- Resists abrasion, moisture, chemicals and scuffing for lasting hold
- High edge tear and split resistance keeps packages secure
- · Sticks instantly to corrugated boxes with high recycled content
- Easy unwind makes tape convenient to use

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>72324</b> -7	Bulk	48 mm x 50 m	Clear	36	RL

### Scotch® Box Sealing Tape 351

This tape is recommended for heavy box sealing and other demanding packaging applications. It features high edge tear and split resistance and complies with environmental considerations of ASTM D1974-92.


- Ideal strength for heavy-weight packages and overseas/export packing and shipping
- Built tough to resist score line breaking and center seam splitting
- High performance tape resists nicks, abrasions, moisture and scuffing
- Sticks instantly and resists tearing for added security
- Easy unwind makes tape convenient to use


	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>72318</b> -6	Bulk	48 mm x 50 m	Clear	36	RL
	0-00-21200- <b>72319</b> -3	Bulk	72 mm x 50 m	Clear	24	RL
*	0-00-51115- <b>68748</b> -8	Ind. Labeled	48 mm x 50 m	Clear	36	RL

## **General Use Packaging Tape**

### Tartan™ Box Sealing Tape 369

A general purpose tape used for non-critical box sealing applications.





• Meets FDA requirements for indirect food contact



1.6 mil Hot Melt

3.43 mil

Hot Melt

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>61551</b> -1	Bulk	48mm x 50 m	Clear	36	RL
0-00-21200- <b>61553</b> -5	Bulk	48mm x 100 m	Clear	36	RL
0-00-21200- <b>61554</b> -2	Bulk	72mm x 100 m	Clear	36	RL
*0-00-51115- <b>68807</b> -2	6 Rolls per Labeled Pack	48 mm x 50 m	Clear	6	PH
*0-00-51115- <b>68805</b> -8	6 Rolls per Labeled Pack	72 mm x 100 m	Clear	4	PH



1.9 mil

Hot Melt





## **Recycled Corrugate Tapes**

### Scotch® Recycled Corrugate Box Sealing Tape 3073

This tape quickly and securely sticks to a wide variety of substrates, including recycled corrugate and fiberboard.

Biaxially-orientated polypropylene backing resists abrasion, moisture, chemicals and scuffing.

 Softer adhesive penetrates shorter fibers of highly recycled content for a strong hold

- Consistent unwind with minimal waste
- Contains over 10% bio-based content

	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-51111- <b>92900</b> -1	Bulk	48 mm x 100 m	Clear	36	RL
	0-00-51111- <b>92901</b> -8	Bulk	72 mm x 100 m	Clear	24	RL
*	0-00-51115- <b>68767</b> -9	Ind. Labeled	48 mm x 100 m	Clear	36	RL
*	0-00-51115- <b>68766</b> -2	Ind. Labeled	72 mm x 100 m	Clear	24	RL

### Scotch® Recycled Corrugate Box Sealing Tape 3071

A carton sealing tape that bonds instantly with recycled corrugated cartons. The strong conformable backing combined with high performance adhesive holds the carton closed throughout the supply chain.

- · Aggressive adhesive bonds instantly
- Tackier than conventional box sealing tapes, will stick to almost any packaging material



2.1 mil Hot Melt

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51115- <b>64569</b> -3	Bulk	48 mm x 100 m	Clear	36	RL
0-00-51115- <b>64571</b> -6	Bulk	72 mm x 100 m	Clear	24	RL



## **Tape and Dispenser Combo Packs**

### Scotch® Box Sealing Tape with Dispenser

The **PSD1 Combo Pack** combines a hand-held Scotch® Box Sealing Tape Dispenser H122 with Scotch® Box Sealing Tape 375\*— the very best performer in the Scotch brand packaging tape line. The easy-handling dispenser has metal teeth to prevent the tape edge from sticking back on the roll, so you can keep on taping (48 mm x 50 m).

	UPC	Product ID	Packaging Sets	Case Qty	Units
	0-00-21200- <b>72308</b> -7	PSD1	1 dispenser, 2 tape rolls	18	PH
*	0-00-51115- <b>71050</b> -6	PSD2	4 pre-loaded dispensers	24	RL

<sup>\*</sup> See page 42 for description of Tape 375 attributes.



2.6 mil

Hot Melt





## **Security Use Tapes**

### Scotch® Security Tape 3199

Ideal for sealing packages and securing loads with high value contents. Printed with CHECK SEAL BEFORE ACCEPTING and diagonal lines.

- 2.05 mil Acrylic
- High adhesion and holding power to recycled paper liner and fiberboard
- Excellent cold temperature performance
- Tamper evident tape is designed to reduce product theft
- Provides easy handling and smooth dispensing in cold temperatures
- FDA approved for indirect food contact

UPC	Packaging	Color	Size	Case Qty	Units
0-00-48011- <b>58528</b> -4	Bulk	Clear*	48 mm x 100 m	36	RL
*0-00-51115- <b>68811</b> -9	6 Rolls per Labeled Pack	Clear*	48 mm x 100 m	36	RL


<sup>\*</sup>Red Lettering

### **Security Use Tapes Properties**

			TAPE BACKING	TAI ADHE	
PRODUCT	Total mils	Backing mils	Polypropylene	Synthetic Rubber (Hot Melt)	Acrylic
3199	2.05	1.1	•		•
3771	1.8	1.2	•	•	
3772	1.8	1.2	•	•	
3775	1.8	1.2	•	•	
3779	1.8	1.2	•	•	

### Scotch® Security Message Box Sealing Tapes

These tapes are nearly impossible to realign once the package has been opened, helping to reduce product pilfering and keeping contents secure through the shipping process. The moisture-resistant backing defies abrasion, chemicals, and scuffing to hold strongly through rough handling. Choice of preprinted messages and tape colors.



	UPC	Prod Number	Packaging	Color	Size	Extra Desc	Case Qty	Units	Message
	0-00-21200- <b>72301</b> -8	3771	Bulk	White	48 mm x 100 m	Red Lettering	36	RL	IF SEAL IS BROKEN, CHECK CONTENTS BEFORE ACCEPTING
*	0-00-51115- <b>68774</b> -7	3771 IW	Ind. Labeled	White	48 mm x 100 m	Red Lettering	36	RL	IF SEAL IS BROKEN, CHECK CONTENTS BEFORE ACCEPTING
*	0-00-51115- <b>68772</b> -3	3772 IW	Ind. Labeled	White	48 mm x 50 m	Red Lettering	36	RL	FRAGILE HANDLE WITH CARE
*	0-00-51115- <b>68773</b> -0	3775 IW	Ind. Labeled	White	48 mm x 100 m	Red Lettering	36	RL	Mixed Merchandise Enclosed
	0-00-21200- <b>72458</b> -9	3775	Bulk	White	48 mm x 100 m	Red Lettering	36	RL	Mixed Merchandise Enclosed
	0-00-21200- <b>46447</b> -8	3779	Bulk	Clear	48 mm x 100 m	Red Lettering	36	RL	CHECK SEAL BEFORE ACCEPTING
	0-00-21200- <b>46449</b> -2	3779	Bulk	Clear	72 mm x 100 m	Red Lettering	24	RL	CHECK SEAL BEFORE ACCEPTING
*	0-00-51115- <b>68775</b> -4	3779 IW	Ind. Labeled	Clear	48 mm x 100 m	Red Lettering	36	RL	CHECK SEAL BEFORE ACCEPTING
*	0-00-51115- <b>68777</b> -8	3779 IW	Ind. Labeled	Clear	72 mm x 100 m	Red Lettering	24	RL	CHECK SEAL BEFORE ACCEPTING







## Scotch® Box Sealing Tape Dispensers

### These durable dispensers can also be used with filament tapes.

### **HR80**



- easy application · Tack, roll, buff and tear in one fluid motion
- · Plastic and metal construction creates a rugged, durable tool
- · Retractable metal blade provides added safety when not in use

UPC	Max Tape Width	Case Qty	Units
0-00-51111- <b>91575</b> -2	2" (48 mm)	6	CS

### **HR83**



- Adjustable tape brake for controlled tape tension and delivery
- High-impact plastic construction provides durability
- Retractable blade prevents accidental nicks and cuts
- Dispenses tapes up to 3" wide

UPC	Max Tape Width	Case Qty	Units
0-00-51111- <b>91589</b> -9	3" (72 mm)	6	CS

### H122

- · Lightweight, compact design provides maneuverability and control
- High-impact, gray plastic for durability and long-life
- Built-in brake for tight, precise package sealing

UPC	Max Tape Width	Case Qty	Units
0-00-21200- <b>06925</b> -3	2" (48 mm)	6	CS

### H128

- Heavy-duty steel construction for tough work environments
- Compact, hand-held design is comfortable to use
- Provides tighter, more precise seals

UPC	Max Tape Width	Case Qty	Units
0-00-21200- <b>06909</b> -3	2" (48 mm)	6	CS

#### H150



- Operates smoothly and quietly for use in noise sensitive places
- Pistol-grip style allows easy one-hand operation
- High-impact plastic and metal is lightweight for easy handling and control

UPC	Max Tape Width	Case Qty	Units
0-00-21200- <b>39518</b> -5	2" (48 mm)	6	CS

### H180

- One-hand, pistol-grip design for easy application
- Plastic and metal construction creates a rugged and durable tool
- Adjustable, hub-mounted tape brake offers control of tension and delivery

UPC	Max Tape Width	Case Qty	Units
0-00-21200- <b>19008</b> -7	2" (48 mm)	6	CS
0-00-21200- <b>19008</b> -7	2" (48 mm)	6	C

### H183

- Pistol-grip style allows easy one-hand operation
- Dispenses tapes up to 3" wide
- · Adjustable tape brake allows tension control and delivery

UPC	Max Tape Width	Case Qty	Units
0-00-21200- <b>61850</b> -5	3" (72 mm)	5	CS

### Packaging Aerosols Shown on page 21







3М™ Shipping-Mate\* **Palletizing** Adhesive

It's not Sealed until it's Scotch® Sealed.







## High Strength Tapes - Filament and Strapping

## For Packaging and General Industrial Applications

When you need a tape as strong as your reputation, you can count on 3M's consistently reliable, market-leading high strength tapes that are engineered to meet virtually any strapping, bundling or reinforcing challenge.

## Streamlined Selection for Application Success

**STRONG** Up to 100 lbs./in.



### **Bundling for Shipping and Handling**

Product	Description	Tensile Strength*
8934	Glass yarn reinforced	100 lbs./in.

<sup>\*</sup> ASTM Test Method D-3759

### **STRONGER** Up to 175 lbs./in.



### **Bulk Bin or Skid Box Banding**

Product	Description	Tensile Strength*
8959	Fiberglass reinforced - both directions	150 lbs./in.
8898	Tensilized polypropylene, bonds firmly	160 lbs./in.
8899HP	High performance, tensilized polypropylene, clean removal	170 lbs./in.
8651	Reinforced strapping tape with ideal strength and clarity for L-clip closures	175 lbs./in.

### **STRONGEST** Up to 600 lbs./in.



### **Rebar Bundling**

Product	Description	Tensile Strength*
898	Glass yarn reinforced, first choice for L- or U-clip closure of non-RSC boxe	380 lbs./in.
8919 MSR	Glass yarn reinforced, clean removal, MSR for oily surfaces	380 lbs./in.
890 MSR	Glass yarn reinforced, modified synthetic rubber adhesive for oily surfaces	600 lbs./in.

### Tartan™ Filament Tape 8934

A general purpose, fiberglass-reinforced tape with a synthetic rubber resin adhesive. Ideal for light-duty strapping, bundling and reinforcing.

- Transparency provides clear visibility of box graphics, printing and illustrations
- Resists nicks, abrasions, moisture and scuffing



4.0 mil 100 lbs./in. Tensil strength

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>86519</b> -0	Bulk	18 mm x 55 m	Clear	48	RL
0-00-21200- <b>86520</b> -6	Bulk	24 mm x 55 m	Clear	36	RL
0-00-21200- <b>73999</b> -6	Bulk	36 mm x 55 m	Clear	24	RL
0-00-21200- <b>86521</b> -3	Bulk	48 mm x 55 m	Clear	24	RL
0-00-51115- <b>32143</b> -6	Bulk	48 mm x 100 m	Clear	24	RL
0-00-21200- <b>39476</b> -8	Bulk	72 mm x 55 m	Clear	12	RL
<b>*</b> 0-00-51125- <b>74892</b> -6	Ind. Labeled	48 mm x 55 m	Clear	24	RL

### Scotch® Bi-Directional Filament Tape 8959

A heavy-duty tape formulated to provide good adhesion to a wide variety of surfaces including metal, plastic and fiberboard. Ideal for light-duty strapping, bundling and reinforcing.

- Transparency provides clear visibility of box graphics, printing and illustrations
- Resists nicks, abrasions, moisture and scuffing



	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>88226</b> -5	Bulk	19 mm x 50 m	Clear	48	RL
	0-00-21200- <b>88227</b> -2	Bulk	25 mm x 50 m	Clear	36	RL
	0-00-21200- <b>88228</b> -9	Bulk	50 mm x 50 m	Clear	18	RL
*	0-00-51125- <b>74901</b> -5	Ind. Labeled	50 mm x 50 m	Clear	18	RL

<sup>\*</sup>Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.







## High Strength Tapes (cont.)

### Scotch® Film Tape 8898 Blue

A general-purpose tape with high initial adhesion and holding power on metal, plastic, fiberboard and glass surfaces.

- Bonds firmly
- Synthetic rubber adhesive won't stain substrate
- Higher adhesion



UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>42300</b> -0	Bulk	18 mm x 55 m	Blue	48	RL
0-00-21200- <b>42301</b> -7	Bulk	24 mm x 55 m	Blue	36	RL
0-00-21200- <b>42302</b> -4	Bulk	48 mm x 55 m	Blue	24	RL
0-00-21200- <b>42485</b> -4	Bulk	72 mm x 55 m	Blue	12	CS

Clean

### Scotch® Filament Tape 898

Provides 380 lbs./in. width tensile strength for strapping, bundling and reinforcing applications.

- Synthetic rubber adhesive has good shear strength to fiber board surfaces
- Ideal for L-clip box closures



	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-51131- <b>06897</b> -1	Bulk	18 mm x 55 m	Clear	48	RL
	0-00-51131- <b>06898</b> -8	Bulk	24 mm x 55 m	Clear	36	RL
	0-00-21200- <b>39868</b> -1	Bulk	36 mm x 55 m	Clear	24	RL
	0-00-51111- <b>91756</b> -5	Bulk	36 mm x 110 m	Clear	24	RL
	0-00-21200- <b>39869</b> -8	Bulk	48 mm x 55 m	Clear	24	RL
	0-00-21200- <b>39870</b> -4	Bulk	72 mm x 55 m	Clear	12	RL
,	<b>*</b> 0-00-51125- <b>74916</b> -9	Ind. Labeled	48 mm x 55 m	Clear	24	RL

### Scotch® Clean Removal Strapping Tape 8899HP Blue

A high-performance, clean removal tape for a wide variety of surfaces.

- Bonds firmly and removes cleanly
- Provides high tensile strength for long-lasting hold
- Resists breaking or tearing even if nicked or punctured during handling
- Superior dynamic shear strength

4.8 mil 160 lb/in Tensil strength

Packaging	Size	Color	Case Qty	Units
Bulk	18 mm x 55 m	Blue	48	CS
Bulk	24 mm x 55 m	Blue	36	CS
Bulk	48 mm x 55 m	Blue	24	CS
Bulk	72 mm x 55 m	Blue	12	CS
	Bulk Bulk	Bulk 18 mm x 55 m  Bulk 24 mm x 55 m  Bulk 48 mm x 55 m	Bulk         18 mm x 55 m         Blue           Bulk         24 mm x 55 m         Blue           Bulk         48 mm x 55 m         Blue	Packaging         Size         Color Qty           Bulk         18 mm x 55 m         Blue         48           Bulk         24 mm x 55 m         Blue         36           Bulk         48 mm x 55 m         Blue         24

### Scotch® Filament Tape 8919MSR

A high-performance tape reinforced with continuous fiberglass yarn filaments.

• 380 lbs./in. width of tensile strength for metalworking applications

 Modified synthetic rubber resin (MSR) adhesive sticks to oily metal surfaces

 Heavy backing provides excellent abrasion, moisture and scuff resistance





UPC	Packaging	Size	Color	Case Qty	Units
0-00-51125- <b>74051</b> -7	Bulk	18 mm x 55 m	Clear	48	RL
0-00-51125- <b>74052</b> -4	Bulk	24 mm x 55 m	Clear	36	RL
0-00-51125- <b>74054</b> -8	Bulk	48 mm x 55 m	Clear	24	RL
0-00-51125- <b>74055</b> -5	Bulk	72 mm x 55 m	Clear	12	RL

### Scotch® Reinforced Strapping Tape 8651

The clearest high-strength tape available—no filaments that reduce tape clarity and obstruct carton graphics or marketing content.

- Adhesive formulated to withstand cold temperature applications
- Polypropylene backing with monofilament "ribs" for tape strength



5.6 mil 175 lb/in Tensil strength

Ultra Clear

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>42352</b> -9	Bulk	18 mm x 55 m	Clear	48	RL

### Scotch® Filament Tape 890MSR

Features a modified synthetic rubber resin (MSR) specifically formulated for optimum oily metal bonding, high adhesion and stain resistance.

- 600 lbs./in. width of tensile strength for heavy-duty metal working applications
- For metal bundling, coil tabbing, high strength reinforcing, and heavy-duty strapping




8.0 mil 600 lb/in Tensil strength

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51125- <b>74063</b> -0	Bulk	18 mm x 55 m	Clear	48	RL
0-00-51125- <b>74059</b> -3	Bulk	24 mm x 55 m	Clear	36	RL
0-00-51125- <b>74061</b> -6	Bulk	48 mm x 55 m	Clear	24	RL









## **Filament Tape Dispensers**

### Scotch® Filament Tape Dispenser H10

- Constructed of high-impact, lightweight plastic
- Carbon steel blade is recessed for added safety
- For tapes width from ½ in. to 1 in. (12 mm to 24 mm)

UPC	Size	Case Qty	Units
0-00-21200- <b>06910</b> -9	1 in. (24 mm)	6	EA

### Scotch® Filament Tape Dispenser H12

- High-impact, durable plastic construction
- Thumb control provides easy operation of hand brake
- Recessed carbon steel blade
- For tapes width from ½ in. to 1 in. (12 mm to 24 mm)

UPC	Size	Case Qty	Units
0-00-21200- <b>06953</b> -6	1 in. (24 mm)	6	EA

### Scotch® Filament Tape Dispenser H121

- Metal construction withstands rugged environments
- Thumb control provides easy operation of hand brake
- Recessed carbon steel blade
- For tapes width from ½ in. to 1 in. (6 mm to 24 mm)

UPC	Size	Case Qty	Units
0-00-51111- <b>97744</b> -6	1 in. (24 mm)	6	EA

## Stretchable Tape

### Scotch® Stretchable Tape 8884

A specialty-performance, transparent stretchable tape designed to contain A- and B-type pallets for internal and external shipping.

- Unique tape construction stretches
   650% maximizing the number of applications when applied with automated equipment
- Provides extremely good pallet stability
- Elastic memory tightly bundles loads during shipment
- Rubber resin adhesive does not tear labels or graphics when removed after shipping

UPC	Extra Desc	Size	Color	Case Qty	Units
0-00-21200- <b>69313</b> -7	Bulk	36 mm x 55 m	Clear	24	RL

### Scotch® Stretchable Tape Dispenser H38

- Designed for applying Scotch® Stretchable Tapes
- Controls the tension with a squeeze
   of the hand brake to hold and stretch the tape
- Sharp, steel blade cuts tape cleanly and quickly


UPC	Size	Case Qty	Units	
0-00-21200- <b>73217</b> -1	1 1/2 in. (36 mm)	6	CS	




















## **Light Duty Packaging Tapes**

### At-a-glance Reference

Product	<b>Backing Material</b>	Typical Use	Comments	
600	UPVC	L-Clip closure, attaching, tabbing and holding	Excellent handling, high clarity and long aging	
605	Polypropylene	Cold temperature packaging	Cold temperature applications; Complies to FDA Regulations for indirect food contact	
610 Cellophane S		Splicing	High heat applications up to 300°F	

Product	Backing Material	Typical Use	Comments	
660	Cellophane	Splicing and easy detection	High heat applications up to 300°F; High adhesion	
690	UPVC	Color coding	Resists moisture and chemicals; Heat shrinkable	
5910	Utility grade for Polypropylene light duty packaging Conforms easily applications		Conforms easily	

## Scotch® Light Duty Packaging Tape 600 Clear High Clarity


A highly transparent tape with excellent visual properties.


- Acrylic adhesive offers moisture and chemical resistance
- Non-staining and sunlight resistant
- Good resistance to edge tear and breakage
- Removes cleanly from fabric without leaving residue 2.3 mil

UPC	Packaging	Color	Size	Case Qty	Units
0-00-51131- <b>06679</b> -3	Bulk	Clear	½" x 72 yd	72	RL
0-00-51131- <b>06680</b> -9	Bulk	Clear	34" x 72 yd	48	RL
0-00-51131- <b>06681</b> -6	Bulk	Clear	1" x 72 yd	36	RL
0-00-51131- <b>06683</b> -0	Bulk	Clear	2" x 72 yd	24	RL

## Scotch® Light Duty Packaging Tape 610 Clear Heat Resistant

This transparent cellophane tape holds strong in temperatures up to 300°F, making it ideal for use in temperature-resistant packaging and splicing applications.





• Backing resists moisture, abrasion and scuffing



2.5 mil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>85441</b> -5	Bulk	½" x 72 yd	Clear	72	RL
0-00-21200- <b>07017</b> -4	Bulk	34" x 72 yd	Clear	48	RL
0-00-21200- <b>07020</b> -4	Bulk	1" x 72 yd	Clear	36	RL

## Scotch® Light Duty Packaging Tape 605 Clear Cold Temperature

Acrylic adhesive adheres immediately on contact to a variety of substrates.


- · Good cold temperature stability
- Conformable backing adheres to curved and irregular surfaces
- · Good aging in sunlight and fluorescent lighting
- FDA approved for indirect food contact

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>71360</b> -6	Bulk	½" x 72 yd	Clear	72	RL
0-00-21200- <b>71361</b> -3	Bulk	34" x 72 yd	Clear	48	RL
0-00-21200- <b>71362</b> -0	Bulk	1" x 72 yd	Clear	36	RL

# Scotch® Light Duty Packaging Tape 660 Red Heat Resistance/Splicing

A high-performance, red film backing coated with a high tack rubber resin adhesive. For splicing, high-temperature applications, carton closure and decorative packaging.

- Bright red color for easy identification
- Rubber resin adheres immediately, provides good aging
- High-temperature resistance up to 300°F (149°C)





2.5 mil

For industrial/occupational use only. Not for consumer sale or use.







### Scotch® Color Coding Tape 690

A decorative tape that quickly and easily color codes your products while providing a secure and durable closure.

- Good "wet grab" adhesion bonds immediately to a variety of surfaces
- Resists turning brittle with age for an extended life
- Moisture- and chemical-resistant for improved durability















2.3 mil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>61633</b> -4	Bulk	12 mm x 66 m	Black	144	RL
0-00-21200- <b>61637</b> -2	Bulk	12 mm x 66 m	Blue	144	RL
0-00-21200- <b>61655</b> -6	Bulk	12 mm x 66 m	White	144	RL
0-00-21200- <b>61660</b> -0	Bulk	12 mm x 66 m	Yellow	144	RL
0-00-21200- <b>61648</b> -8	Bulk	12 mm x 66 m	Red	144	RL
*0-00-51125- <b>74885</b> -8	Ind. Labeled	48 mm x 66 m	Red	36	RL
0-00-21200- <b>61640</b> -2	Bulk	12 mm x 66 m	Green	144	RL

## 3M<sup>™</sup> Utility Grade Light Duty Packaging Tape 5910 High Conformability

A utility grade, transparent tape designed for light-duty packaging applications.

- Good stability in cold and damp conditions
- Conformable backing for curved and irregular surfaces
- Polypropylene backing is transparent for easy read through
- Good aging in sunlight and fluorescent lighting

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>16937</b> -3	Bulk	½" x 72 yd	Clear	72	RL
0-00-21200- <b>16938</b> -0	Bulk	¾" x 72 yd	Clear	48	RL

## **Tabletop Dispensers**

### Scotch® Mainline Dispenser P56W

Holds multiple rolls tape up to 6" in total width, eliminating multiple dispensers in one area.

- Saves time and increases efficiency in high-volume work areas
- Weighted, rubber base for scratch-free stability
- Dispenses film backed, filament enforced and general tapes

UPC	Case Qty	Units
0-00-51131- <b>06965</b> -7	1	EA

### Scotch® Definite Length Dispenser M96

Saves tape by dispensing only the length needed—ideal for high volume and rapid carton closure applications.

- Weighted base ensures dispenser remains in a fixed position, yet remains portable for easy relocation
- Durable high-impact construction will stand up to years of use
- Handles tape up to 1" (24 mm) wide on a 3" core


UPC	Case Qty	Units
0-00-21200- <b>13463</b> -0	6	EA

### Scotch® Definite Length Dispenser M920

Adjusts to dispense predetermined lengths of ½" to 4" tape with the push of a lever—just the right amount with no waste or worry.

- For applications where repeated and frequent taping is required
- Weighted base for easy one-hand dispensing
- Handles tape up to 1" (24 mm) wide on a 3" core

UPC	Case Qty	Units
0-00-21200- <b>11093</b> -1	6	EA









## **3M™ Packing List Envelopes**

### Wide Variety of Choices for **Document Control and Protection**

- Convenient peel-and-stick document protection
- Non-printed and printed with standard messages
- Custom sizes and/or custom printed messages
- Reclosable 3M<sup>™</sup> Zipper Closure Envelope is available in two sizes
- Polyethylene backing/synthetic rubber adhesive/paper liner
- Backing thickness: 2.0 mil: Total thickness: 5.0 mil



Easy Inspection — For cross border shipping and other inspection situations, zipper closure envelopes open easily and close securely. Tough construction resists moisture and abrasion.



Secure Adhesion — High tack pressure sensitive adhesive on the back of the envelope grabs on contact and holds securely even to curved and flexible surfaces

### T (Top Printed)

### PLE-T1 **PACKING LIST/** INVOICE ENCLOSED



4.5" x 5.5" 1,000/case



PLE-T1 INV INVOICE ENCLOSED

4.5" x 5.5" 1.000/case



PLE-T3 **PACKING LIST/** INVOICE ENCLOSED

7" x 5.5" 1.000/case



PLE-T1 PL **PACKING LIST ENCLOSED** 

4.5" x 5.5" 1,000/case



PLE-T2 **PACKING LIST/** INVOICE ENCLOSED

4.5" x 6"

side-loac



PLE-T4 **PACKING LIST/** INVOICE ENCLOSED

5.5" x 10" 1,000/case



### NP (Non-Printed)

### PLE-NP1 **NO PRINT (CLEAR)**

4.5" x 5.5" 1.000/case



4.5" x 6" 1.000/case





### PLE-NP6 **NO PRINT** (CLEAR)

9.5" x 12" 1.000/case



PLE-NP9 **NO PRINT (CLEAR)** 

7" x 6" 1,000/case





### PLE-FED1 **NO PRINT** (PERFED)

6.75" x 10.75" 500/case



### F (Full Face Printed)

PLE-F1 **PACKING LIST/** INVOICE **ENCLOSED** 



4.5" x 5.5" 1.000/case





### PLE-NP5 **NO PRINT** (CLEAR)

7" x 10" 1.000/case



## **Zipper Closure Envelope** PLE-NPZ XL **NO PRINT (CLEAR)** 10" x 12.5" 500/case Got the **zip!**







## **3M<sup>™</sup> Packing List Envelopes**

Product ID	UPC	Description	Packaging*	Size	Case Qty	Units
TOP PRINTED						
PLE-T1	0-00-48011- <b>53423</b> -7	Side-load, PACKING LIST/INVOICE ENCLOSED	Bulk	4.5" x 5.5"	1000	CS
PLE-T1 PL	0-00-21200- <b>37593</b> -4	Side-load, PACKING LIST ENCLOSED	Bulk	4.5" x 5.5"	1000	EA
PLE-T1 INV	0-00-21200- <b>37594</b> -1	Side-load, INVOICE ENCLOSED	Bulk	4.5" x 5.5"	1000	EA
PLE-T2	0-00-21200- <b>73784</b> -8	Side-load, PACKING LIST/INVOICE ENCLOSED	Bulk	4.5" x 6"	1000	EA
PLE-T3	0-00-21200- <b>73712</b> -1	Top-load, PACKING LIST/INVOICE ENCLOSED	Bulk	7" x 5.5"	1000	EA
PLE-T4	0-00-21200- <b>73785</b> -5	Side-load, PACKING LIST/INVOICE ENCLOSED	Bulk	5.5" x 10"	1000	EA
FULL FACE PRIN	TED					
PLE-F1	0-00-21200- <b>73711</b> -4	Side-load, PACKING LIST/INVOICE ENCLOSED	Bulk	4.5" x 5.5"	1000	EA
NON-PRINTED						
PLE-NP1	0-00-21200- <b>73709</b> -1	Side-load, No Print (clear)	Bulk	4.5" x 5.5"	1000	CS
PLE-NP2	0-00-21200- <b>73778</b> -7	Side-load, No Print (clear)	Bulk	4.5" x 6"	1000	EA
PLE-NP3	0-00-21200- <b>73708</b> -4	Top-load, No Print (clear)	Bulk	5.5" x 7"	1000	EA
PLE-NP4	0-00-21200- <b>73706</b> -0	Side-load, No Print (clear)	Bulk	5.5" x 10"	1000	EA
PLE-NP5	0-00-21200- <b>73779</b> -4	Side-load, No Print (clear)	Bulk	7" x 10"	1000	EA
PLE-NP6	0-00-21200- <b>73780</b> -0	Side-load, No Print (clear)	Bulk	9.5" x 12"	1000	EA
PLE-NP9	0-00-21200- <b>37589</b> -7	Top-load, No Print (clear)	Bulk	7" x 6"	1000	EA
PLE-FED1	0-00-21200- <b>73777</b> -0	Top-load, No Print, Perforated	Bulk	6.75" x 10.75"	500	CS
ZIPPER CLOSUR	E					
PLE-NPZXL	0-00-51115- <b>24817</b> -7	Side-load, No Print (clear)	Bulk	10" x 12.5"	500	EA

## **Tape Sheets**

### 3M<sup>™</sup> Tape Sheet 822 and 822P

Pre-cut, high-performance padded tape sheets small enough to place in pockets, drawers, tool boxes and on desktops.

- For label protection, patching and mending of packaging
- Removable liner tab allows for easy handling and application
- Abrasion- and weather-resistant with a strong and long aging adhesive



Hot Melt 3.1 mil

UPC	Prod ID	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>61618</b> -1	822	40 pads of 25 sheets per pack	4" x 6"	Clear	5 Packs	CS
0-00-51131- <b>06991</b> -6	822P	2 pads per pack	4" x 6"	Clear	60 Packs	PH

### 3M<sup>™</sup> Tape Sheets 3750P

Pre-cut for convenient carrying and dispenserless taping. Perfect for in-field repair of damaged packaged goods.

- Strong rubber adhesive sticks to bags, boxes, plastic film, powder coats, metals and glass
- Weather resistant and long aging for indoor/outdoor use



	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-51131- <b>06990</b> -9	2 pads of 25 sheets per pack	2" x 6"	Clear	20 Packs	CS
4	°0-00-51125- <b>74888</b> -9	40 pads of 25 sheets per labeled pack	2" x 6"	Clear	5 Packs	CS

<sup>\*</sup>Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.







## Scotch® Pouch Tapes

### Fast, Easy plus Reduces Waste

- "Trap it" with unique 3M tape construction strong adhesive tape area on the edges frame the large, clear non-tack center
- Attach documents, packing lists, invoices, literature, catalogs, brochures, or even product samples, small part packets or other merchandise
- Polypropylene backing/synthetic rubber adhesive sticks well to corrugate and many other substrates
- Low profile design reduces label sheer off in transit

## On a roll for the greatest time savings

Improve throughput by up to 40% by pairing Scotch® Pouch Tape with companion dispensers M797 or M727.





Product ID	UPC	Individual Pouch Size (h x w)	Printed Message	Message Color	Applications	Dispenser Options	Case Qty	Units
824	0-00-21200- <b>22913</b> -8	5" x 6"	"Documents Enclosed"	Orange	333 per roll	M727 or M797	12	RL
007	0-00-21200- <b>61840</b> -6	5" x 8"	"Documents Enclosed"	Orange	500 per roll	M727 or M797	8	RL
827	0-00-21200- <b>61844</b> -4	6" x 8"	"Documents Enclosed"	Orange	500 per roll	M797	8	RL
829	0-00-51131- <b>06961</b> -9	5" x 8"	"Packing List Enclosed"	Orange	333 per roll	M727 or M797	12	RL


## Scotch® RCT Pouch Tapes




### **NEW Adhesive Technology**

The proprietary adhesive on these tapes is 10x stickier than other solutions—designed specifically for hard-to-stick-to surfaces, keeping documents secure from starting point to the finish. And there are no tricky liners to remove—applies fast and reduces clutter in work areas.

- For great times savings, choose the tape on a roll Tape 824RCT
- For portability and pre-cut convenience, choose the padded format – Tape 830RCT



Product ID	UPC	Individual Pouch Size (h x w)	Printed Message	Message Color	Applications	Dispenser Options	Case Qty	Units
824RCT	0-00-76308- <b>86376</b> -0	5" x 6"	"Documents Enclosed"	Green	500 per roll	M727 or M797	12	RL
824RCT	0-00-76308- <b>86377</b> -7	5" x 8"	"Documents Enclosed"	Green	500 per roll	M727 or M797	8	RL
830RCT	0-00-76308- <b>86326</b> -5	5" x 6"	"Documents Enclosed"	Green	25 sheets	M727 or M797	200	Pads
830RCT	0-00-76308- <b>86370</b> -8	6" x 10"	"Documents Enclosed"	Green	25 sheets	M797	160	Pads



Scotch® Pouch Tape Dispenser M727

Metal Construction – Maximum width 5"
0-00-21200-**06944**-4 6 per case, EA



Scotch® Pouch Tape Dispenser M797

Metal Construction – Maximum width 6"
0-00-21200-61872-7 1 per case, EA









## **Label Protection Tapes**

## Protect Labeled Shippers, Mailers, Envelopes, Tubes, Drums, Tubs

- Multiple options for use on wide range of substrates, in many applications including outdoor use
- High clarity for sharp read-through accuracy
- Brightly colored tape draws attention to important label content

### Scotch® Label Protection Tape 821

Keeps address labels safe and secure.

- Protects labels from damage caused by abrasion and moisture
- Dispenses and hand tears easily for convenient use



2.5 mil Acrylic

1.9 mil Hot Melt

- Low-glare, matte surface enables easy scanning of barcodes
- Write-on surface accepts permanent markers, ballpoint pens, even pencil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>04563-</b> 9	Bulk	2" x 72 yd	Pink	24	RL
0-00-21200- <b>04133</b> -4	Bulk	4" x 72 yd	Pink	8	RL

### Scotch® Label Protection Tape 3565

Sticks instantly to fiberboard and many treated and finished surfaces, and offers real protection for shipping labels.

- High performance tape resists nicks, abrasions, moisture and scuffing
- Excellent transparency makes labels easy to read
- Bonds instantly and resists tearing and splitting for added security
- Holds strong through rough handling during shipping

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51131- <b>17855</b> -7	Bulk	96 mm x 100 m	Clear	18	RL
0-00-51131- <b>17856</b> -4	Bulk	120 mm x 100 m	Clear	12	RL

### Tartan<sup>™</sup> Label Protection Tape 3765

A utility grade tape featuring a transparent, strong polypropylene film backing paired with an acrylic adhesive.





1.5 mil Acrylic

- Adheres instantly and conforms well to a wide range of treated and finished surfaces
- A transparent tape that keeps labels easy to read and allows sharp bar code read-through

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>73160</b> -0	Bulk	96 mm x 132 m	Clear	12	RL
0-00-21200- <b>73161</b> -7	Bulk	120 mm x 132 m	Clear	8	RL

### Scotch® Label Protection Dispenser M707

Platform design allows label protection and easy pouch tape application

- Durable metal construction withstands rugged working conditions
- Pull-and-cut design dispenses and hand tears with ease
- 4" maximum tape width capacity










## **Carry Handles and Hang Tabs**

### 3M<sup>™</sup> Carry Handles (White)

Conveniently practical. These durable, pre-cut strips with adhesive at each end create a loop that transforms almost anything into a travel-friendly package.

- One-handed carrying for large, awkward or heavier items
- A cost-effective replacement for additional paper or plastic bags
- Strong synthetic rubber adhesive adheres to a wide variety of package surfaces
- Convenient pads are available in choice of strengths

UPC	Product ID	Extra Desc	Size	Case Qty	Units
0-00-51115- <b>71389</b> -7	8310	25 handles/pad, 110 pads/case	1" x 17" x 3" Holds up to 10 lbs.	1	CS
0-00-51115- <b>71383</b> -5	8315	25 handles/pad, 80 pads/case	1-3/8" x 23" x 3" Holds up to 15 lbs.	1	CS
0-00-51115- <b>71385</b> -9	8320	25 handles/pad, 110 pads/case	1" x 17" x 3" Holds up to 20 lbs.	1	CS
0-00-51115- <b>71386</b> -6	8330	25 handles/pad, 80 pads/case	1-3/8" x 23" x 6" Holds up to 30 lbs.	1	CS







### 3M™ Hang Tabs (Clear)

Sturdy, pressure sensitive adhesive tabs that stick to most surfaces and enable products and packages to hang on display pegs.



- Clear plastic allows graphics to show through retail packaging
- Use for in-store repair of damaged packaging such as torn punches in chipboard header cards

UPC	Product ID	Extra Desc	Size	Case Qty	Units
0-00-21200- <b>62225</b> -0	1074	100 pads of 10 hang tabs/ pad; (1000 hang tabs/carton)	1" x 2" (Round Hole)	1 carton	CS
*0-00-51125- <b>74950</b> -3	1075 PK50	50 pads of 10 hang tabs/ pack; 5 packs/ box (500 hang tabs)	2" x 2" (Delta Hole)	5	BX
*0-00-51125- <b>74951</b> -0	1076 PK50	50 pads of 10 hang tabs/ pack; 5 packs/ box (500 hang tabs)	2" x 2" (Round Hole)	5	ВХ

\*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.



Masking Made Simple

Now it's easy to choose the best tape to get industrial jobs done right. This simplified 5-tape system is built on increasing levels of performance and the common goal of helping you finish jobs worth finishing.











3M<sup>™</sup> Value **Masking Tape** 

The basic tape for basic jobs

Marking, temporary holding, wrapping and sealing.

3M™ General Use **Masking Tape** 

The tough tape for everyday jobs

Bundling, labeling and identifying.

3M<sup>™</sup> Performance Yellow Masking Tape

The dependable choice for industrial performance

Paint masking, marking, color coding and sealing. 3M<sup>™</sup> High Performance **Green Masking Tape** 

Industrial strength with clean removal

Ideal for two-tone paint applications on vehicles. 3M<sup>™</sup> Specialty **High Temperature Purple Masking Tape** 

The highest degree of industrial performance

Super-sharp paint lines for high temperature masking jobs.

4.4 mil

19 lb/in (N/100 mm)

Tensil strength

### 3M<sup>™</sup> Value Masking Tape 101+

A cost-effective crepe paper tape that holds, bundles, seals and performs other non-critical taping jobs where a pressure-sensitive tape is needed.

- Cost-effective solution for indoor light-duty applications
- Crepe paper backing provides easy tearing
- Provides conformability on irregular surfaces and around corners
- Hand tearable and sliver resistance with one-piece removal for easy use
- Ideal for marking, temporary holding, wrapping and sealing

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51115- <b>68706</b> -8	Bulk	12 mm x 55 m	Tan	72	RL
0-00-51115- <b>68707</b> -5	Bulk	18 mm x 55 m	Tan	48	RL
0-00-51115- <b>68708</b> -2	Bulk	24 mm x 55 m	Tan	36	RL
0-00-51115- <b>68709</b> -9	Bulk	36 mm x 55 m	Tan	24	RL
0-00-51115- <b>68710</b> -5	Bulk	48 mm x 55 m	Tan	24	RL
0-00-51115- <b>68711</b> -2	Bulk	72 mm x 55 m	Tan	12	RL
0-00-51115- <b>68712</b> -9	Bulk	96 mm x 55 m	Tan	8	RL

\*Except as otherwise indicated (\*). for industrial/occupational use only. Not for consumer sale or use.



5.1 mil

22 lb/in (N/100 mm)

Tensil strength






### 3M<sup>™</sup> General Use Masking Tape 201+

Sticks and holds to a variety of surfaces such as paper, fiberboard, glass, rubber, plastic and metal and removes cleanly with no residue.

- Crepe paper backing is hand tearable, medium conformability
- Unwinds smoothly for easy to control application and removal
- Tough masking tape seals, holds, bundles, labels, wraps, splices and protects
- Dependable for use in temperatures up to 200°F (93°C) for 30 minutes


UPC	Packaging	Size	Color	Case Qty	Units
0-00-51115- <b>64738</b> -3	Bulk	12 mm x 55 m	Tan	72	RL
0-00-51115- <b>64739</b> -0	Bulk	18 mm x 55 m	Tan	48	RL
0-00-51115- <b>64740</b> -6	Bulk	24 mm x 55 m	Tan	36	RL
0-00-51115- <b>64741</b> -3	Bulk	36 mm x 55 m	Tan	24	RL
0-00-51115- <b>64742</b> -0	Bulk	48 mm x 55 m	Tan	24	RL
0-00-51115- <b>64743</b> -7	Bulk	72 mm x 55 m	Tan	12	RL
0-00-51115- <b>64744</b> -4	Bulk	96 mm x 55 m	Tan	8	RL
*0-00-51115- <b>64746</b> -8	Ind. Wrapped	24 mm x 55 m	Tan	36	RL
*0-00-51115- <b>64747</b> -5	Ind. Wrapped	36 mm x 55 m	Tan	24	RL
<b>*</b> 0-00-51115- <b>64748</b> -2	Ind. Wrapped	48 mm x 55 m	Tan	24	RL



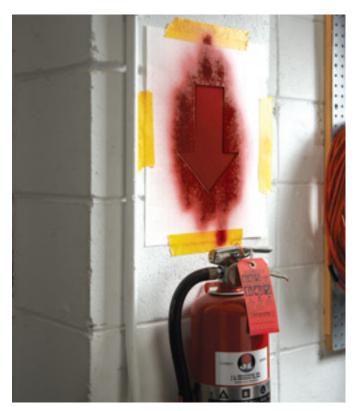

### 3M<sup>™</sup> Performance Yellow Masking Tape 301+

An industrial strength masking tape that sticks instantly to most surfaces including metal, rubber, glass, plastic and removes easily to create sharp paint lines.



- Proprietary, solvent-free adhesive sticks to most surfaces and removes cleanly in one piece
- Thick backing resists bleed through
- Yellow color improves visibility during masking process
- Crepe-paper backing conforms over irregular surfaces, contours and around corners
- Withstands surface temperatures up to 225°F (107°C) for 30 minutes in paint bake operations

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51115- <b>64749</b> -9	Bulk	12 mm x 55 m	Yellow	72	RL
0-00-51115- <b>64750</b> -5	Bulk	18 mm x 55 m	Yellow	48	RL
0-00-51115- <b>64751</b> -2	Bulk	24 mm x 55 m	Yellow	36	RL
0-00-51115- <b>64752-</b> 9	Bulk	36 mm x 55 m	Yellow	24	RL
0-00-51115- <b>64753</b> -6	Bulk	48 mm x 55 m	Yellow	24	RL
0-00-51115- <b>64754</b> -3	Bulk	72 mm x 55 m	Yellow	12	RL
0-00-51115- <b>64755</b> -0	Bulk	96 mm x 55 m	Yellow	8	RL
<b>*</b> 0-00-51115- <b>64756</b> -7	Ind. Wrapped	24 mm x 55 m	Yellow	36	RL
<b>*</b> 0-00-51115- <b>64757</b> -4	Ind. Wrapped	36 mm x 55 m	Yellow	24	RL
* 0-00-51115- <b>64758</b> -1	Ind. Wrapped	48 mm x 55 m	Yellow	24	RL

### 3M<sup>™</sup> High Performance Green Masking Tape 401+

Ideal for critical paint masking applications where strong holding and high temp performance is required.

- Adhesive formula removes cleanly in one piece with no adhesive residue
- Remains in place around corners, over contours and irregular surfaces
- Resists paint bleed-through to help create sharp paint lines
- Green backing improves visibility and accuracy during paint masking

6.7 mil

25 lb/in (N/100 mm)

Tensil strength

 Withstands surface temperatures up to 250°F (121°C) for 30 minutes in paint bake operations

	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-51115- <b>64759</b> -4	Bulk	12 mm x 55 m	Green	48	RL
	0-00-51115- <b>64760</b> -4	Bulk	18 mm x 55 m	Green	48	RL
	0-00-51115- <b>64761</b> -1	Bulk	24 mm x 55 m	Green	36	RL
	0-00-51115- <b>64762</b> -8	Bulk	36 mm x 55 m	Green	24	RL
	0-00-51115- <b>64763</b> -5	Bulk	48 mm x 55 m	Green	24	RL
	0-00-51115- <b>64764</b> -2	Bulk	72 mm x 55 m	Green	12	RL
	0-00-51115- <b>64765</b> -9	Bulk	96 mm x 55 m	Green	8	RL
*	0-00-51115- <b>64769</b> -7	Ind. Wrapped	48 mm x 55 m	Green	24	RL



\*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.



6.3 mil

22 lb/in (N/100 mm)

Tensil strength







## Scotch® Fine Line Masking Tapes

### Scotch® Ultimate Paint Edge Masking Tape 2460


Features a unique acrylic adhesive technology for good, instant adhesion that is temperature-resistant and capable of withstanding paint bake operations of up to 300°F (149°C) for up to 30 minutes.

- Peels off cleanly, without leaving adhesive residue
- Ultra-thin backing provides a low paint ridge for sharp, smooth paint lines
- Adhesive maintains good holding power that resists lifting and curling
- Acrylic adhesive provides UV resistance, which allows outdoor use for up to 21 days with clean removal from most surfaces
- Solvent and moisture resistance prevents paint bleed-through

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51111- <b>91928</b> -6	Bulk	1" x 60 yd	Yellow	36	RL

### 3M<sup>™</sup> Specialty High Temperature Purple Masking Tape 501+

A premium, high performance crepe paper masking tape designed to create super-sharp paint lines in most industrial painting situations.



- Conforms and maintains integrity when formed around a corner
- Backing is easy to tear, resists slivering and provides one piece removal
- Smooth, controlled unwind dispenses evenly and is less likely to tear off roll
- Tape is heat resistant for high-temperature paint bake cycles up to 300°F (149°C) for 30 minutes

UPC	Packaging	Size	Color	Case Qty	Units
3M <sup>™</sup> Specialt	y High Temp	erature Purple M	asking Ta	pe 501+	
0-40-54596- <b>11630</b> -6	Bulk	18 mm x 55 m	Purple	48	RL
0-40-54596- <b>11635</b> -1	Bulk	24 mm x 55 m	Purple	36	RL
0-40-54596- <b>11637</b> -5	Bulk	36 mm x 55 m	Purple	24	RL
0-40-54596- <b>11639</b> -9	Bulk	48 mm x 55 m	Purple	24	RL
0-40-54596- <b>11645</b> -0	Bulk	72 mm x 55 m	Purple	12	RL
0-40-54596- <b>11647</b> -4	Bulk	96 mm x 55 m	Purple	8	RL
3M <sup>™</sup> Specia	lty High Tem	perature Tan Ma	sking Tape	e 501+	
0-00-51115- <b>64773</b> -4	Bulk	18 mm x 55 m	Tan	48	RL
0-00-51115- <b>64774</b> -1	Bulk	24 mm x 55 m	Tan	36	RL
0-00-51115- <b>64775</b> -8	Bulk	36 mm x 55 m	Tan	24	RL
0-00-51115- <b>64776</b> -5	Bulk	48 mm x 55 m	Tan	24	RL

72 mm x 55 m



Scotch® Fine Line Masking Tape 218 Green

A low profile, high-performance polypropylene plastic film with natural rubber adhesive for quick adhesion.

5.0 mil 13 lb/in (N/100 mm) Tensil strength

3..3 mil

Tensil strength

17 lb/in (N/100 mm)

- Tape thinness provides excellent color line separation
- Performs well for long straight lines and smooth curves
- Offers excellent moisture and solvent resistance
- Backing allows taping over fresh paint sooner than paper tapes with less chance of damage

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>16028</b> -8	Bulk	1/4 in x 60 yd	Green	144	RL
0-00-21200- <b>04698</b> -8	Bulk	1/2 in x 60 yd	Green	72	RL
0-00-21200- <b>04699</b> -5	Bulk	3/4 in x 60 yd	Green	48	RL
0-00-21200- <b>04700</b> -8	Bulk	1 in x 60 yd	Green	36	RL
0-00-51138- <b>94710</b> -1	Bulk	2 in x 60 yd	Green	24	RL
0-00-21200- <b>05500</b> -3	Bulk	4 in x 60 yd	Green	8	RL



12

Tan





0-00-51115-**64777**-2

## **Masking Tapes**

### 3M<sup>™</sup> Performance Masking Tape 2380


Among our greatest crepe tapes. This highly versatile tape has all the features that are desirable for a high performance masking tape, such as strong adhesion, tough backing, excellent heat resistance and easy removal. It remains in place around corners, contours, and irregular surfaces to provide sharp paint lines in paint applications.



7.2 mil 28 lb/in (N/100 mm) Tensil strength

- Provides strong holding power and exceptional high-temperature resistance
- Resists slivering when exposed to high heat
- Removes cleanly after 30 minutes at bake temperatures up to 325°F (162°C)
- Heavy crepe paper backing resists bleed-through
- Adhesive bonds instantly to many surfaces, holding in place without lifting or curling Strong backing is easy to tear and provides one-piece removal

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>44584</b> -2	Bulk	18 mm x 55 m	Tan	48	RL
0-00-21200- <b>44583</b> -5	Bulk	24 mm x 55 m	Tan	36	RL
0-00-21200- <b>44582</b> -8	Bulk	36 mm x 55 m	Tan	24	RL
0-00-21200- <b>44581</b> -1	Bulk	48 mm x 55 m	Tan	24	RL
0-00-21200- <b>44580</b> -4	Bulk	72 mm x 55 m	Tan	12	RL

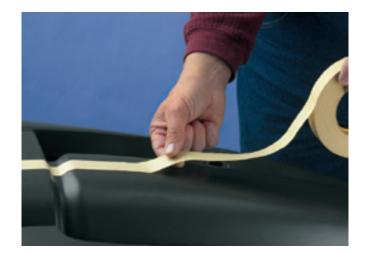

## Flatback Tape



### 3M<sup>™</sup> High Performance Flatback Tape 2519

A high-performance, general purpose tape ideal for splicing liner boards, as well as bundling and packaging applications where adhesion to paper products is necessary. This thick, 7.1 mil tape features a strong kraft paper backing capable of resisting moisture and high temperatures, and can be torn by hand for fast application.



7.1 mil 47 lb/in (N/100 mm) Tensil strength

- Proven excellent for general purpose splicing at temperatures as high as 200°F (93°C)
- Offers quick and efficient roll starting and roll closure
- Thick backing can be torn by hand, yet is suitable for machine dispensing
- Natural rubber adhesive offers excellent tack and holding power
- Provides good moisture resistance

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51128- <b>98282</b> -2	Bulk	18 mm x 55 m	Brown	48	RL
0-00-51128- <b>98283</b> -9	Bulk	24 mm x 55 m	Brown	36	RL
0-00-51128- <b>98284</b> -6	Bulk	36 mm x 55 m	Brown	24	RL
0-00-51128- <b>99446</b> -7	Bulk	48 mm x 55 m	Brown	24	RL
0-00-51128- <b>99447</b> -4	Bulk	72 mm x 55 m	Brown	12	RL
0-00-51128- <b>99448</b> -1	Bulk	96 mm x 55 m	Brown	8	RL





17 0 mil

Tensil strength:

41 lb/in (N/100 mm)

# **Duct Tapes. Simplified**

Three tapes that handle 90% of your projects.







### 3M<sup>™</sup> All Purpose Duct Tape DT8

Conformable with instant bond

The most stretchable of 3M's duct tapes. Its unique design offers high instant adhesion coupled with maximum conformability.

- Great for contoured surfaces and guick labeling
- Tightly woven scrim with high tensile strength for light-duty bundling
- Use for poly abatement, quick repairs, and fast attachments

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-76308 <b>-98118</b> -1	Ind. Wrapped 4	18 mm x 54.8 m	Silver	24	RL



8.0 mil Tensil strength: 31 lb/in (N/100 mm)

### 3M™ Heavy Duty **Duct Tape DT11**

Versatility with holding power

High holding power with a broad attribute performance for demanding jobs.


- Sticks immediately and stavs on irregular surfaces without lifting—even on plastics
- Polyethylene, water-resistant backing resists wear and light abrasion—great for securing temporary floor coverings
- Long-lasting, moisture-resistant seal in many containment situations, such as attaching heavy poly draping and pipe sealing


UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-76308- <b>98119</b> -8	Ind. Wrapped	48 mm x 54.8 m	Black	24	RL
<b>*</b> 0-00-76308- <b>98120</b> -4	Ind. Wrapped	48 mm x 54.8 m	Silver	24	RL

### 3M<sup>™</sup> Super Duty Duct Tape DT17

Super thick for super tough jobs

Ultra-thick, water-resistant backing resists wear and abrasion yet tears easily by hand.






Maximum strength for the most demanding applications

















## **Duct Tapes** (cont.)




Up to 6 mo. Clean Removal

### Clean Removal

### 3M<sup>™</sup> Performance Plus Duct Tape 8979

Designed for both permanent and temporary applications indoor and outdoor. It is removable with little or no adhesive residue from most opaque surfaces up to 6 months after application.



- 12.1 mil Tensil strenath:
  - Tensil strength: 36 lb/in (N/100 mm)
- Special adhesive sticks immediately and reliably to most surfaces
- Protects against light abrasion including overspray from bead blasting, sand blasting and shot peening
- Good choice for hanging polyethylene drapes for containment activities
- Protects against grime, UV and weather, then removes cleanly

	UPC	Packaging	Size	Color	Case Qty	Units
*	0-00-48011 <b>-53918</b> -8	Ind. Wrapped	48 mm x 54.8 m	Black	24	RL
*	0-00-51131- <b>17819</b> -9	Ind. Wrapped	48 mm x 54.8 m	Olive	24	RL
*	0-00-48011 <b>-53851</b> -8	Ind. Wrapped	48 mm x 22.8 m	Slate Blue	12	RL
*	0-00-21200 <b>-56468</b> -0	Ind. Wrapped	48 mm x 54.8 m	Slate Blue	24	RL
	0-00-21200- <b>56469</b> -7	Bulk	72 mm x 54.8 m	Slate Blue	12	RL

### 3M™ Outdoor Masking Poly Tape 5903

Comprised of a UV and weather-resistant polyethylene film and a durable synthetic rubber adhesive.

- Tears off the roll by hand for easy application
- Moisture and weather resistant for durability in outdoor applications
- Red color provides clear visibility for easy application, adjustment and removal
- Clean removal for up to 30 days outdoors preserves quality and aesthetics of finished work



7.5 mil
Tensil strength:
21 lb/in (N/100 mm)

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-51115- <b>31842</b> -9	Ind. Wrapped	48 mm x 54.8 m	Red	24	RL

### **Professional Grade**

### 3M<sup>™</sup> Multi-Purpose Duct Tape 3900

Our general purpose, low-profile, industrial-strength duct tape. Its aggressive, natural rubber adhesive provides instant adhesion to a wide variety of surfaces.



7.6 mil Tensil strength: 28 lb/in (N/100 mm)

- Polyethylene backing resists moisture, prolonging the tape bond in moist and humid environments
- Cloth scrim tears straight in both directions for easy handling and application
- Conformable tape works well on curved and irregular surfaces
- Withstands temperatures up to 200°F (93°C) for up to 30 minutes

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-21200- <b>49833</b> -6	Ind. Wrapped	48 mm x 54.8 m	Black	24	RL
<b>*</b> 0-00-21200- <b>49832</b> -9	Ind. Wrapped	48 mm x 54.8 m	Blue	24	RL
<b>*</b> 0-00-21200- <b>49831</b> -2	Ind. Wrapped	48 mm x 54.8 m	Olive	24	RL
<b>*</b> 0-00-21200- <b>49830</b> -5	Ind. Wrapped	48 mm x 54.8 m	Red	24	RL
<b>*</b> 0-00-51131 <b>-06976</b> -3	Ind. Wrapped	48 mm x 54.8 m	Silver	24	RL
<b>*</b> 0-00-21200- <b>49829</b> -9	Ind. Wrapped	48 mm x 54.8 m	White	24	RL
<b>*</b> 0-00-21200- <b>49828</b> -2	Ind. Wrapped	48 mm x 54.8 m	Yellow	24	RL



### 3M<sup>™</sup> Heavy Duty Duct Tape 3939

Has the tensile strength and adhesion for splicing, masking, patching, seaming, hanging poly sheeting, sealing PVC pipes, covering trip hazards and a host of other industrial applications.



8.6 mil
Tensil strength:
25 lb/in (N/100 mm)

- High tensile strength for a secure hold under stress
- Thick rubber adhesive bonds to most rough and smooth surfaces for a tight seal
- Silver polyethylene surface resists wear, abrasion and water
- Removes cleanly for up to 3 months when applied indoors

UPC	Packaging	Size	Color	Case Qty	Units
*0-00-51131- <b>06975</b> -6	Ind. Wrapped	48 mm x 54.8 m	Silver	24	RL
0-00-21200- <b>85562</b> -7	Bulk	72 mm x 54.8 m	Silver	12	RL
0-00-21200- <b>85563</b> -4	Bulk	96 mm x 54.8 m	Silver	12	RL







### 3M™ Extra Heavy Duty Duct Tape 6969

This industrial strength tape is ideal for heavy bundling, joining and sealing.

- Aggressive rubber adhesive provides a strong bond and clean removal, even on rough surfaces
- Water-resistant polyethylene backing seals out moisture; resists abrasion and wear



10.0 mil
Tensil strength:
34 lb/in (N/100 mm)


- Thick tape handles easily and tears cleanly and evenly without splintering
- Meets burn test requirements for UL 723, ASTM E-84, NFPA 255, UBC 8-1

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-21200- <b>22773</b> -8	Ind. Wrapped	48 mm x 54.8 m	Black	24	RL
<b>*</b> 0-00-21200- <b>22780</b> -6	Ind. Wrapped	48 mm x 54.8 m	Olive	24	RL
<b>*</b> 0-00-51131- <b>06969</b> -5	Ind. Wrapped	48 mm x 54.8 m	Silver	24	RL

## **Utility Grade**

### 3M<sup>™</sup> Vinyl Duct Tape 3903

This tape is ideal for temporary repairs, identification, contrast, securing wiring, bundling, sealing, holding and protecting.





6.5 mil Tensil strength: 12.6 lb/in (N/100 mm)

- dirt, and moisture, and resists abrasion and many chemicals
   Peels off cleanly after 30 minutes on painted steel as hot as 200°F (93°C)
- Easy to tear and conforms to irregular surfaces
- Available in 7 colors for coding, process tagging, highlighting trip hazards, and enhancing decor

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-51131- <b>06995</b> -4	Ind. Wrapped	2 in x 50 yd	Black	24	RL
<b>*</b> 0-00-51131- <b>06978</b> -7	Ind. Wrapped	2 in x 50 yd	Blue	24	RL
<b>*</b> 0-00-51131- <b>06984</b> -8	Ind. Wrapped	2 in x 50 yd	Gray	24	RL
<b>*</b> 0-00-21200- <b>44989</b> -5	Ind. Wrapped	3 in x 50 yd	Gray	18	RL
<b>*</b> 0-00-51131- <b>06986</b> -2	Ind. Wrapped	2 in x 50 yd	Green	24	RL
<b>*</b> 0-00-51131- <b>06992</b> -3	Ind. Wrapped	2 in x 50 yd	Red	24	RL
<b>*</b> 0-00-51131- <b>06981</b> -7	Ind. Wrapped	2 in x 50 yd	White	24	RL
<b>*</b> 0-00-51131- <b>06982</b> -4	Ind. Wrapped	2 in x 50 yd	Yellow	24	RL

### 3M<sup>™</sup> General Use Duct Tape 2929

An economical tape designed for general, everyday duties where strength and moisture resistance are necessary.

- Great for applications requiring a thin tape, such as wiring
- Removes cleanly for up to three months when applied indoors
- Water-resistant backing resists wear and light abrasion

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-51115- <b>24883</b> -2	Ind. Wrapped	1.88 in x 50 yd	Silver	24	RL



5.5 mil Tensil strenath:

19 lb/in (N/100 mm)

### 3M<sup>™</sup> Value Duct Tape 1900

For light-duty sealing, bundling, marking and temporary repairs in non-critical applications.

- Synthetic rubber adhesive sticks on contact to metal, glass, plastic, concrete and other surfaces
- Water-resistant polyethylene coating seals well in moist and humid environments
- Its surface readily accepts writing with markers for temporary labeling



5.8 mil Tensil strength: 19 lb/in (N/100 mm)

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-51111- <b>97841</b> -2	Ind. Wrapped	1.88 in x 60 yd	Silver	24	RL
*0-00-51115- <b>23421</b> -7	Ind. Wrapped	1.88 in x 50 yd	Silver	24	RL
*0-00-51115- <b>23422</b> -4	Ind. Wrapped	2.83 in x 50 yd	Silver	12	RL

## **High Strength Cloth Tapes**

### 3M<sup>™</sup> Premium Matte Cloth (Gaffers) Tape

Features a cotton cloth backing with a natural rubber adhesive system for use in high-strength and highly conformable applications.

- Indoor and outdoor applications
- High strength, conformable, abrasion and weather resistant backing
- Hand tearable
- Low light reflectance backing for entertainment and video productions



11.0 mil
Tensil strength:
56 lb/in (N/100 mm)

UPC	Ind. Wrapped Prod ID	Size	Color	Case Qty	Units
<b>*</b> 0-00-76308- <b>98495</b> -3	GT1	24 mm x 50 m	Black	48	RL
<b>*</b> 0-00-76308- <b>98514</b> -1	GT2	48 mm x 50 m	Black	24	RL
<b>*</b> 0-00-76308- <b>98523</b> -3	GT2	48 mm x 50 m	Gray	24	RL
<b>*</b> 0-00-76308- <b>98534</b> -9	GT3	72 mm x 50 m	Black	16	RL



\*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.



## Foil, HVAC and Seaming Tapes

## Common Tape Solutions for Heating, Ventilation and Insulation

### At-a-glance Reference

Product ID	Leading Application	Total Thickness	Temperature Range	UL Listings
425	Most versatile aluminum tape	4.6 mils	-65°F to 300°F (-54°C to 149°C)	L-T-80C, SAE AMS-T-23397, UL 723 Classified, UL 746C Recognized, F.A.R. 25.853(a)
1520CW	Excels in cold and humid conditions	3.3 mils	-40°F to 250°F (-40°C to 121°C)	UL723 Classified (5/10 Flame/Smoke Rating), ULC S102 Classification (10/0 Flame/Smoke Rating)
1521CW	Reflective insulation and duct wraps	2.7 mils	-40°F to 250°F (-40°C to 121°C)	UL723 Classified (5/10 Flame/Smoke Rating)
1525CW	Tri-directional facing tape	9.5 mils	-40°F to 240°F (-40°C to 116°C)	UL723 Classified (5/10 Flame/Smoke Rating); ASTM C1136, Type II and IV
1580-P	For demanding environments	2.0 mils	-20°F to 200°F (-29°C to 93°C)	UL181B-FX Listed
1581A	Rigid and flexible ductwork	4.0 mils	-40°F to 300°F (-40°C to 149°C)	UL181A-P & UL181B-FX Listed, ULC S102 Listed (0/0 Flame/Smoke)
1599B	Seams and seals flexible ductwork	3.1 mils	-40°F to 185°F (-40°C to 85°C)	UL 181B-FX listed
8087CW	Seal, seam, splice and repair	3.0 mils	-40°F to 220°F (-40°C to 105°C)	

## 3M<sup>™</sup> Aluminum Foil Tape 425

Most Versatile Aluminum Tape

Comprised of a dead soft aluminum foil backing and coated with a highly engineered pressure sensitive acrylic adhesive. Ideal for heat shielding, heat reflecting, chemical masking, light enhancement, chemical milling, seaming, sealing and de-paint operations.



- Acrylic adhesive provides long term durability, but removes cleanly after harsh masking applications
- Withstands exposure to flame, weathering, moisture and UV
- Recognized by UL to UL746C and Classified by UL to UL723, Class "L" for low flammability rating



4.6 mil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51125- <b>85388</b> -0	Bulk	1 in x 60 yd	Silver	36	RL
0-00-51125- <b>85311</b> -8	Bulk	2 in x 60 yd	Silver	24	RL
0-00-51125- <b>85312</b> -5	Bulk	3 in x 60 yd	Silver	12	RL


### 3M<sup>™</sup> Venture Tape<sup>™</sup> Aluminum Foil Tape 1520CW

Excels in Cold and Humid Conditions

A high strength, dead soft aluminum foil coated with a cold weather solvent acrylic pressure sensitive adhesive.







Conforms well to irregular surfaces



3.3 mil

UPC	Packaging	Size	Color	Case Qty	Units	
*0-07-50351- <b>15203</b> -2	Ind. Labeled	72 mm x 45.7 m	Silver	16	RL	

### 3M<sup>™</sup> Venture Tape<sup>™</sup> Aluminum Foil Tape 1521CW

For Reflective Insulation and Duct Wraps

A dead soft aluminum foil coated with an acrylic pressure sensitive adhesive for superior temperature, UV and solvent resistance.

 Excellent barrier against moisture, dust, flame and certain chemicals

Multi-use, hand tearable



2.7 mil



	123						
UPC	Packaging	Size	Color	Case Qty	Units		
*0-00-51128- <b>95561</b> -1	Ind. Labeled	48 mm x 45.7 m	Natural Aluminum	24	RL		
*0-00-51128 <b>-95560</b> -4	Ind. Labeled	72 mm x 45.7 m	Natural Aluminum	16	RL		








3.0 mil

### 3M<sup>™</sup> Venture Tape<sup>™</sup> FSK Facing Tape 1525CW

### Tri-directional Facing Tape

Foil/kraft lamination coated with a cold weather acrylic pressure sensitive adhesive. Vapor seal for fibrous and sheet metal ducts as well as FSK systems.

- UL723 Classified (5/10 Flame/Smoke Rating)
- ASTM C1136, Type II and IV
- Tri-directional reinforcement



# \*0-07-50351-**50014**-7 Ind. Labeled 48 mm x 45.7 m \*0-07-50351-**15253**-7 Ind. Labeled 72 mm x 45.7 m \*0-07-50351-**50015**-4 Ind. Labeled 99 mm x 45.7 m

### 3M<sup>™</sup> Venture Tape<sup>™</sup> UL181B-FX Mastik Foil Tape 1580-P

#### For Demanding Environments

A printed, annealed aluminum foil coated with a heavy mastik adhesive for superior performance and durability.

- Applies easily to fibrous, flexible and sheet metal ducts
- Excels in demanding temperature and humidity environments
- Water resistant bond on most surfaces



### 3M<sup>™</sup> Venture Tape<sup>™</sup> UL181A-P **Aluminum Foil Tape 1581A**

### For Rigid and Flexible Ductwork

Ideal for sealing rigid fiberglass duct boards and flexible (non-metallic) air duct and connector systems.

- UL Listed, meets requirements of UL181A-P and UL181B-FX
- Conformable tape resists flame, moisture, weather, UV degradation, and many chemicals
- Performs well in hot and cold conditions
- · Linered for easy use





### Seams and Seals Flexible Ductwork

A UV resistant, bi-axially oriented polypropylene (BOPP) coated tape with a cold weather acrylic adhesive. This conformable tape is flame resistant, chemical resistant, and thermally conductive for heating and cooling efficiency.

- UL Listed, meets requirements of UL181B-FX
- Performs well in hot and cold conditions
- Linered and hand tearable



3.1 mil





3M<sup>™</sup> Construction Seaming Tape 8087CW

#### Seaming Batted Insulation

Acrylic adhesive adheres on contact to housewrap, insulated sheathing, vapor barrier film and unfinished wood. Red color provides contrast for quick visual inspection.

- Excellent cold temperature adhesion in temperatures as low as 14°F (-10°C)
- UV resistant film helps protect against degradation by sunlight
- Conformable backing adheres to curved and irregular surfaces
- Low moisture vapor transmission rate does not compromise performance of vapor barriers


UPC	Packaging	Size	Color	Case Qty	Units
*0-00-76308- <b>14235</b> -3	Ind. Labeled	48 mm x 50 m	Red	16	RL
0-00-76308- <b>14237</b> -7	Bulk	72 mm x 50 m	Red	16	RL





4.0 mil





## **Marking and Safety Tapes**

Identifying hazards with colors that comply with OSHA and ANSI\*

### 3M™ Ultra Durable Floor Marking Tape 971



Thin backing provides excellent abrasion resistance and withstands lifting from forklift traffic and dragging pallets. Vibrant color is locked into the backing for long-term visibility. Easy to apply and remove.



UPC	Packaging	Size	Color	Case Qty	Units
0-00-76308- <b>14095</b> -3	Bulk	2" x 36 yd	Yellow	1	RL
0-00-76308- <b>14096</b> -0	Bulk	3" x 36 yd	Yellow	1	RL
0-00-76308- <b>14097</b> -7	Bulk	4" x 36 yd	Yellow	1	RL
0-00-76308- <b>14098</b> -4	Bulk	2" x 36 yd	Blue	1	RL
0-00-76308- <b>14099</b> -1	Bulk	3" x 36 yd	Blue	1	RL
0-00-76308- <b>14100</b> -4	Bulk	4" x 36 yd	Blue	1	RL
0-00-76308- <b>14101</b> -1	Bulk	2" x 36 yd	Red	1	RL
0-00-76308- <b>14102</b> -8	Bulk	3" x 36 yd	Red	1	RL
0-00-76308- <b>14103</b> -5	Bulk	4" x 36 yd	Red	1	RL
0-00-76308- <b>14104</b> -2	Bulk	2" x 36 yd	White	1	RL
0-00-76308- <b>14105</b> -9	Bulk	3" x 36 yd	White	1	RL
0-00-76308- <b>14107</b> -3	Bulk	4" x 36 yd	White	1	RL

## 3M™ Marking and Safety Tape 471

Solve a variety of challenges, including floor and safety marking, color coding and industrial applications with this

durable tape designed to resist wear, scrapes and moisture.

Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without

lifting and retracting. One-piece, clean removal

from many surfaces helps reduce clean-up and labor costs.

### 3M™ Marking and Safety Tape 471

	UPC	Packaging	Size	Color	Case Qty	Units
*	0-00-51115- <b>68866</b> -9	Ind. Labeled	2" x 36 yd	Red	24	RL
	0-00-21200- <b>03106</b> -9	Bulk	3/4" x 36 yd	Red	48	RL
	0-00-21200- <b>03107</b> -6	Bulk	1" x 36 yd	Red	36	RL
	0-00-21200- <b>04305</b> -5	Bulk	2" x 36 yd	Red	24	RL
	0-00-21200- <b>06469</b> -2	Bulk	3" x 36 yd	Red	12	RL
*	0-00-51115- <b>68843</b> -0	Ind. Labeled	3/4" x 36 yd	Blue	48	RL
*	0-00-21200- <b>03121</b> -2	Ind. Labeled	1" x 36 yd	Blue	36	RL
*	0-00-51115- <b>68863</b> -8	Ind. Labeled	2" x 36 yd	Blue	24	RL
	0-00-21200- <b>03120</b> -5	Bulk	3/4" x 36 yd	Blue	48	RL
	0-00-21200- <b>04308</b> -6	Bulk	2" x 36 yd	Blue	24	RL
	0-00-21200- <b>03122</b> -9	Bulk	3" x 36 yd	Blue	12	RL
*	0-00-51115- <b>68864</b> -5	Ind. Labeled	3/4" x 36 yd	White	48	RL
	0-00-21200- <b>03135</b> -9	Bulk	3/4" x 36 yd	White	48	RL
	0-00-21200- <b>03136</b> -6	Bulk	1" x 36 yd	White	36	RL
	0-00-21200- <b>04311</b> -6	Bulk	2" x 36 yd	White	24	RL
	0-00-21200- <b>06466</b> -1	Bulk	3" x 36 yd	White	12	RL
*	0-00-51115- <b>68852</b> -2	Ind. Labeled	3/4" x 36 yd	Yellow	48	RL
*	0-00-51115- <b>68856</b> -0	Ind. Labeled	2" x 36 yd	Yellow	24	RL
	0-00-21200- <b>03127</b> -4	Bulk	3/4" x 36 yd	Yellow	48	RL
	0-00-21200- <b>03128</b> -1	Bulk	1" x 36 yd	Yellow	36	RL
	0-00-21200- <b>04310</b> -9	Bulk	2" x 36 yd	Yellow	24	RL
	0-00-21200- <b>06470</b> -8	Bulk	3" x 36 yd	Yellow	12	RL
	0-00-21200- <b>03131</b> -1	Bulk	4" x 36 yd	Yellow	8	RL
*	0-00-51115- <b>68824</b> -9	Ind. Labeled	2" x 36 yd	Black	24	RL
	0-00-21200- <b>03114</b> -4	Bulk	3/4" x 36 yd	Black	48	RL
	0-00-21200- <b>03115</b> -1	Bulk	1" x 36 yd	Black	36	RL
	0-00-21200- <b>04306</b> -2	Bulk	2" x 36 yd	Black	24	RL
	0-00-21200- <b>06467</b> -8	Bulk	3" x 36 yd	Black	12	RL
	0-00-21200- <b>04309</b> -3	Bulk	2" x 36 yd	Brown	24	RL
	0-00-21200- <b>48424</b> -7	Bulk	2" x 36 yd	Purple	24	RL
	0-00-21200- <b>04312</b> -3	Bulk	2" x 36 yd	Orange	24	RL
*	0-00-51115- <b>68871</b> -3	Ind. Labeled	3/4" x 36 yd	Green	48	RL
*	0-00-21200- <b>03145</b> -8	Ind. Labeled	1" x 36 yd	Green	36	RL
*	0-00-51115- <b>68822</b> -5	Ind. Labeled	2" x 36 yd	Green	24	RL
	0-00-21200- <b>04313</b> -0	Bulk	2" x 36 yd	Green	24	RL

<sup>\*</sup> Occupational Safety and Health Act, American National Standards Institute, Inc.

#### **OSHA Regulations** Color Guide

#### **Lane Marking**

Black/white or black/yellow diagonal striped, and black and yellow solid colored tapes are the basic colors for lane marking.

#### **Fire Safety**

Red immediately identifies fire protection equipment and apparatus, including fire alarm boxes, fire blanket boxes, fire extinguishers, and emergency stop bars, buttons and switches.

### **Physical Hazards**

5.2 mil

Institute, Inc. (Color scheme from booklets ANSI Z53.1-1979 and ANSI A13.1-1981)

Yellow or yellow/black stripes is used for marking physical hazards, such as low pipes, beams, handrails, pillars, posts and fixtures that extend into work areas. Yellow is also used to warn against using equipment under repair.

The colors and applications shown here comply with OSHA (Specification 1910-144, and are recommended by the American National Standards

Orange identifies dangerous machine and equipment parts that may cause serious injury. Orange should be used to mark hazardous parts that are exposed when enclosure doors are open or guards are removed.

#### Safety/First Aid

Green designates safety and first-aid equipment, such as air tanks, eye washes and first-aid kits.







### 3M<sup>™</sup> Vinyl Tape Safety & 5S Color Coding Pack

A pack of eight 2" x 36 yd rolls of our Go-To vinyl tapes. Ideal for organizing and identifying traffic lanes, material



areas, and areas of potential health risks for employees. Colors include: Yellow, orange, red, green, blue, black, black/yellow, black/white.

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-76308- <b>97971</b> -3	Ind. Labeled	2" x 36 yd	Variety	8	RL

### 3M<sup>™</sup> General Purpose Vinyl Tape 764 Color Coding Pack

An economical vinyl tape option for color coding, bundling, and safety marking applications. This tape resists wear, weathering and light abrasion while providing good instant adhesion to many surfaces. Pack colors include: yellow, red, white, green, blue and black



	0.01.00.010	 0011, 1.00,	 9.00,	 

	UPC	Packaging	Size	Color	Case Qty	Units	
*	0-00-48011- <b>58896</b> -4	Pack	1" x 22 yd	Multiple	6	PK	

### 3M<sup>™</sup> Hazard Warning Tape 766 Black/Yellow

This striped vinyl tape features good, instant adhesion to many surfaces. Used for marking of equipment pinch points or gears for warning purposes, temporary floor marking around equipment, or spills.



UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>43181</b> -4	Bulk	2" x 36 yd	Black/Yellow	24	RL
0-00-21200- <b>43182</b> -1	Bulk	3" x 36 yd	Black/Yellow	12	RL

### 3M<sup>™</sup> Safety Stripe Tape 766DC Black/Yellow

Use as a marking tape for a variety of warning applications. The rubber adhesive offers quick stick and good holding strength on many substrates. These individually wrapped tape rolls come in a convenient display case.



UPC	Packaging	Size	Color	Case Qty	Units
* 0-00-51115- <b>64448</b> -1	Ind. Wrapped/ Display Case	2" x 36 yd	Black/Yellow	12	RL

### 3M<sup>™</sup> Hazard Warning Tape 767 Red/White

5.0 mil (0.125 mm) vinyl backing with rubber adhesive. Stripes promote employee safety by marking pinch points or gears on equipment. Provides temporary floor marking around equipment or spills. Mark risers on stairways or low-clearance areas.



**UPC Packaging** Size Color Case Qty Units 0-00-21200-43186-9 Bulk 2" x 36 yd Red/White 24 RL







### 3M<sup>™</sup> Safety Stripe Tape 767DC Red/White

A bright vinyl backed tape providing high visibility, promoting safety and resisting water. The rubber adhesive sticks tightly adhering to most surfaces, ideal for straight or curved lines.



5.0 mil

	UPC	Extra Desc	Size	Color	Case Qty	Units
*	0-00-51115- <b>63745</b> -2	Ind. Wrapped/ Display Case	2" x 36 yd	Red/White	12	RL

### 3M<sup>™</sup> Safety Stripe Tape 5700

Tape resists most common chemicals and solvents. Used to identify or mark traffic areas and physical hazards. The clear vinyl over the colored stripes help protect stripes from abrasion. The 5.5 mil total tape

thickness resists snagging often associated with thicker products. 5.5 mil

UPC		Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>043</b>	<b>67</b> -3	Bulk	2" x 36 yd	Black/White	24	RL
*0-00-76308- <b>979</b>	<b>34</b> -8	Ind. Labeled	2" x 36 yd	Black/White	24	RL

### 3M<sup>™</sup> Marking and Safety Tape 5702

Ideal for marking lanes, hazardous areas, protruding equipment, and low hanging objects in factories, warehouses and hospitals. Yellow and black color is embedded into the tape construction to provide long-term high visibility and abrasion resistance.



One-piece, clean removal from many surfaces helps reduce clean-up and labor costs

• Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting


	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>04585</b> -1	Bulk	2" x 36 yd	Black/Yellow	24	RL
	0-00-21200- <b>03951</b> -5	Bulk	3" x 36 yd	Black/Yellow	12	RL
*	· 0-00-51115- <b>68827</b> -0	Ind Laheled	2" x 36 vd	Black/Yellow	24	RI

### 3M<sup>™</sup> Lane Marking Applicator M-1

Helps you apply safety tape to floors quickly and easily. Our handy walk-behind tape dispenser is the easiest way to mark warehouse traffic lanes and hazard areas without crawling around on the floor

Use this applicator to dispense 3M™ Safety Stripe and Marking and Safety Tapes to help improve workplace safety.

UPC	Case Qty	Units
0-00-51115- <b>80886</b> -9	1	EA



## Foam Tapes

### 3M<sup>™</sup> Double Coated Urethane Foam Tape 4026 & 4026W

A thick, double-coated, open-cell urethane foam tape with a paper liner. Bonds surfaces and provides handling convenience and cushioning.

- High shear strength
- Durable on interior mounting applications
- Clean appearance



UPC	Packaging	Size	Color	Case Qty	Units
3M™ Do	uble Coated	Urethane Foa	m Tape 40	26W	
<b>*</b> 0-00-51128- <b>98844</b> -2	Ind. Labeled	½ in x 5 yd	White	12	RL
<b>*</b> 0-00-51128- <b>98845</b> -9	Ind. Labeled	¾ in x 5 yd	White	12	RL
3M™ D	ouble Coated	Urethane Foa	am Tape 4	026	
0-00-21200- <b>17056</b> -0	Bulk	¾ in x 36 yd	Natural	12	RL
0-00-21200- <b>17057</b> -7	Bulk	1 in x 36 yd	Natural	9	RL

### 3M<sup>™</sup> Polyethylene Foam Tape 4496 & 4496B

A polyethylene, double-coated, closed-cell foam tape. Bonds to a variety of surfaces for light duty applications.

- Quick stick
- Conformable
- Bonds to irregular surfaces



UPC	Packaging	Size	Color	Case Qty	Units
3	BM™ Polyethyl	ene Foam Tap	e 4496		
0-00-21200 <b>-24307</b> -3	Bulk	¾ in x 36 yd	White	12	RL
0-00-21200- <b>24306</b> -6	Bulk	1 in x 36 yd	White	9	RL
3	M™ Polyethyle	ene Foam Tap	e 4496B		
*0-00-51115- <b>81760</b> -1	Ind. Labeled	½ in x 5 yd	Black	36	RL
*0-00-51115- <b>81761</b> -8	Ind. Labeled	34 in x 5 yd	Black	12	RL
0-00-21200 <b>-30423</b> -1	Bulk	1 in x 36 yd	Black	9	RL

### 3M<sup>™</sup> Double Coated Urethane Foam Tape 4008

A thick, double-coated open-cell urethane foam tape with a 62 lb. densified kraft paper liner. Ideal for applications such as mounting interior signage and nameplates. Off-white color provides a clean appearance.



UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>06451</b> -7	Bulk	¾ in x 36 yd	Off-White	12	RL
0-00-21200- <b>06452</b> -4	Bulk	1 in x 36 yd	Off-White	9	RL



### 3M<sup>™</sup> Double Coated Urethane Foam Tape 4016

A thick, double-coated open-cell urethane foam tape with a 62 lb. densified kraft paper liner. Ideal for applications such as mounting interior signage and nameplates. Its 62 mil. foam provides handling convenience and cushioning.

62 mil

45 mil

- High shear strength on metal and high surface energy plastics
- Durable foam is ideal for interior mounting applications
- Thick foam dampens and prevents vibration and open-cell structure aids component cooling long term temperature resistance: 220°F (104°C).

	UPC	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>06454</b> -8	Bulk	34" x 36 yd	Off-White	12	RL
	0-00-21200- <b>06455</b> -5	Bulk	1" x 36 yd	Off-White	9	RL
	3M™ Extra-ti	nick Multipur	pose Indoor N	Nounting Tap	e 4016	
*	0-00-51115- <b>25524</b> -3	Clamshell	¾" x 15 yd	Off-White	12	RL

Short Roll Length

### 3M<sup>™</sup>VHB<sup>™</sup>Tape RP45

Multi-purpose acrylic adhesive with a conformable foam core. Bonds to a variety of surfaces including glass, metal, many plastics, composites and more.


- Fast and easy to use
- Permanent bonding method provides good strength and durability
- Offers design flexibility with its viscoelasticity and bonds even at lower temperatures

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-51115- <b>81752</b> -6	Ind. Labeled	½" x 5 yd	Gray	12	RL
<b>*</b> 0-00-51115- <b>81755</b> -7	Ind. Labeled	34" x 5 yd	Gray	36	RL









80 mil

40 mil

### 3M™VHB™ Tape 4910 Clear

Ideal for transparent materials or wherever a clear bond is needed. Effectively replaces screws, rivets and studs when bonding materials.

- Bonds high surface energy substrates
- Provides cushioning, damping, and impact resistance
- UL listing 746C



r	Case Qty	Units

45 mil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-76308- <b>14636</b> -8	Bulk	¾ in x 36 yd	Clear	12	RL
0-00-76308- <b>14572-</b> 9	Bulk	1 in x 36 yd	Clear	9	RL


### 3M™ VHB™ Heavy Duty Mounting Tape 5952



Modified acrylic adhesive and very conformable acrylic foam core bonds to a wide variety of substrates including powder coated paints and irregular surfaces.

- Creates a permanent seal against water, moisture and more by offering better gap filling capabilities
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- · Allows the use of thinner, lighter weight and dissimilar materials

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>97056</b> -6	Bulk	¾ in x 36 yd	Black	12	RL
0-00-21200- <b>56229</b> -7	Bulk	1 in x 36 yd	Black	9	RL

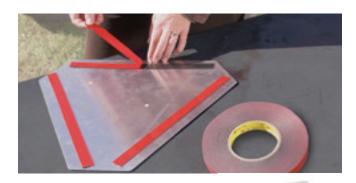

### 3M™VHB™ Heavy Duty Mounting Tape 5952 Black

A very conformable foam that bonds and seals simultaneously to withstand vibration, impact and weathering. Bonds high, medium, and medium/low surface energy substrates. Provides handling convenience, cushioning, damping, and impact resistance.

UPC	Packaging	Size	Color	Case Qty	Units
* 0-00-51115- <b>25522</b> -9	Clamshell	¾" x 15 yd	Black	12	RL

#### \*Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.







### 3M™ Extreme Sealing Tape 4411

40 mil thick tape featuring a flexible backing that easily conforms over screw heads, rivets, joints, splices, and other protrusions to provide protection from water intrusion.

- Sticks on contact to many metals, plastics and other hard-to-stick-to surfaces
- Provides immediate seal with no wait time or oozing associated with liquid sealants
- Tough, yet flexible clear ionomer backing is abrasion resistant and instantly paintable
- Acrylic adhesive provides excellent sealing qualities and good outdoor durability

	UPC	Packaging	Size	Color	Case Qty	Units			
	0-00-51115- <b>63195</b> -5	Bulk	2" x 36 yd	Gray	6	RL			
	3M™ Extreme Sealing Tape 4411N								
*	0-00-51128- <b>98846</b> -6	Ind. Labeled	1½" x 5 yd	Translucent	12	RL			

### 3M™ Extreme Sealing Tape 4412

80 mil thick tape is ideal for vent stacks and windows, gutters, downspouts, parapet walls, trailer home roofs, metal buildings and much more.

- Sticks on contact to many metals, plastics and other hard-to-stick-to surfaces
- Tough, yet flexible clear ionomer backing is abrasion resistant and instantly paintable
- Acrylic adhesive provides excellent sealing qualities and good outdoor durability

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51115- <b>63197</b> -9	Bulk	2" x 18 yd	Gray	6	RL
0-00-51111- <b>92277</b> -4	Bulk	1" x 18 yd	Translucent	9	RL
0-00-51111- <b>92278</b> -1	Bulk	2" x 18 yd	Translucent	6	RL
0-00-51111- <b>92279</b> -8	Bulk	2½" x 18 yd	Translucent	3	RL
0-00-51111- <b>92280</b> -4	Bulk	3" x 18 yd	Translucent	3	RL
0-00-51111- <b>92281</b> -1	Bulk	4" x 18 yd	Translucent	2	RL



## **Specialty Tapes**

### 3M<sup>™</sup> Polyethylene Tape 483

A high performance, versatile tape with a wide operational temperature range. Used for general sealing of containers, electroplating, color coding and moisture proofing.



5.0 mi

- Remains flexible to -20°F (-28°C) for cold temperature applications
- Stretches and conforms to irregular surfaces
- Polyethylene backing provides good solvent resistance
- Meets MIL-STD-2041D for nuclear and corrosion sensitive applications

UPC	Packaging	Size	Color	Case Qty	Units
<b>*</b> 0-00-51115- <b>68865</b> -2	Ind. Labeled	1" x 36 yd	Black	36	RL
0-00-21200- <b>05167</b> -8	Bulk	1" x 36 yd	Black	36	RL
0-00-21200- <b>04321</b> -5	Bulk	2" x 36 yd	Black	24	RL
0-00-21200- <b>05153</b> -1	Bulk	1" x 36 yd	Blue	36	RL
0-00-21200- <b>03771</b> -9	Bulk	1" x 36 yd	Red	36	RL
<b>*</b> 0-00-51115- <b>68841</b> -6	Ind. Labeled	2" x 36 yd	Red	24	RL
0-00-21200- <b>04320</b> -8	Bulk	2" x 36 yd	Red	24	RL
<b>*</b> 0-00-51115- <b>68854</b> -6	Ind. Labeled	1" x 36 yd	White	36	RL
0-00-21200- <b>05163</b> -0	Bulk	1" x 36 yd	White	36	RL
<b>*</b> 0-00-51115- <b>68857</b> -7	Ind. Labeled	2" x 36 yd	White	24	RL
0-00-21200- <b>05165</b> -4	Bulk	2" x 36 yd	White	24	RL
0-00-21200- <b>05166</b> -1	Bulk	3" x 36 yd	White	12	RL
<b>*</b> 0-00-51115- <b>68837</b> -9	Ind. Labeled	1" x 36 yd	Yellow	36	RL
<b>*</b> 0-00-51115- <b>68850</b> -8	Ind. Labeled	2" x 36 yd	Yellow	24	RL
0-00-21200- <b>05170</b> -8	Bulk	1" x 36 yd	Transparent	36	RL

### 3M™ Preservation Sealing Tape 4811

A conformable and stain resistant tape that offers excellent performance as a short term preservation tape.

- Withstands temperatures up to 170°F (77°C)
- Pressure sensitive adhesive resists weathering in hot and cold temperatures
- Quick, clean removal up to six months from surfaces
- · Excellent for securing polyethylene film, sealing and protecting

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>62334</b> -9	Bulk	2" x 36 yd	White	24	RL
0-00-21200- <b>62335</b> -6	Bulk	3" x 36 yd	White	12	RL

### 3M™ Glass Cloth Tape 361

Offers exceptional stability in harsh conditions. Withstands 450°F (232°C) and intermittent temperatures up to 550°F (287°C) or higher, depending on heat source.




- Used for permanent sealing of high temperature ducts or chambers
- Very strong abrasion resistant backing for use as masking protection in thermal spray operations
- Silicone adhesive provides long aging, good holding power

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>04275</b> -1	Bulk	2" x 60 yd	White	24	RL

### 3M™ Impact Stripping Tape 500

Specially formulated rubber backing withstands impact against common blasting media including aluminum oxide, steel shot, glass bead and plastic.





33.0 mil

- Clean, even cutting and easy alignment is ideal for lettering
- Acrylic adhesive provides strong adhesion to various surfaces

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>60895</b> -7	Bulk	2" x 10 yd	Green	6	RL

<sup>\*</sup>Except as otherwise indicated (\*), for industrial/occupational use only. Not for consumer sale or use.



9.5 mil





#### 3M<sup>™</sup> UHMW Film Tape 5423

The ultra-high molecular weight of this tape significantly reduces friction to create an effective solution for anti-stick and easy-release requirements.



- Translucent, abrasion resistant backing helps protect surfaces from wear
- Can help reduce squeaks, rattles and other noises that occur with movement
- Withstands temperatures from -30° to 225°F (-34° to 107°C)

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>14456</b> -1	Boxed	1½" x 18 yd	Transparent	6	RL

#### 3M<sup>™</sup> PTFE Film Tape 5490 Gray

Offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a smooth, non-stick surface over a variety of substrates to assist in the movement of materials in many types of lay-flat applications.

• Withstands temperatures from -65° to 500°F (-54° to 260°C)

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>07281</b> -9	Boxed	1" x 36 yd	Gray	9	RL
0-00-21200- <b>07283</b> -3	Boxed	2" x 36 yd	Gray	6	RL

#### 3M<sup>™</sup> PTFE Film Tape 5498

Offers an extremely low coefficient of friction which, in combination with a pressure sensitive rubber adhesive, creates a smooth, non-stick surface over a variety of substrates.

- Reduces friction between moving surfaces
- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Withstands temperatures from 40° to 350°F (4° to 177°C)

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>24965</b> -5	Bulk	2" x 36 yd	Beige	24	RL



For industrial/occupational use only. Not for consumer sale or use.





### Repositionable Tapes


These double coated tapes feature a permanent adhesive on the face side of the tape and a removable, repositionable adhesive on the back side. Perfect for repositioning or multiple openings and closings.



# 3M<sup>™</sup> Removable Repositionable Tape 9415PC

This tape has a high tack acrylic adhesive 400 on one side and low tack adhesive 1000 on the other side on a 78 lb. polycoated kraft paper liner with a polyester film carrier.







UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>14536</b> -0	Bulk	½" x 72 yd	Clear	72	RL
0-00-21200- <b>14537</b> -7	Bulk	¾" x 72 yd	Clear	48	RL
0-00-21200- <b>14538</b> -4	Bulk	1" x 72 yd	Clear	36	RL

# 3M<sup>™</sup> Removable Repositionable Double Coated Tape 9425

This tape has high tack acrylic adhesive 420 on one side and medium tack acrylic adhesive 1050 on the other side on a 58 lb. polycoated kraft paper liner with a UPVC carrier.

 The UPVC film carrier provides differential stability which offers improved handling for laminating and die-cutting

• Use to close polybags and envelopes, backlit signs, attaching labels, novelties, posters, P.O.P. displays and more

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>67709</b> -0	Bulk	½" x 72 yd	Clear	18	RL
0-00-21200- <b>67710</b> -6	Bulk	¾" x 72 yd	Clear	12	RL
0-00-21200- <b>67708</b> -3	Bulk	1" x 72 yd	Clear	9	RL

### **Adhesive Transfer Tapes** -Scotch® ATG Tapes Family

#### Finger Touch of Pressure Sensitive Adhesive

#### Scotch® ATG Adhesive **Transfer Tape 924 (General Purpose)**



A great go-to general purpose adhesive transfer film tape with an acrylic, reverse wound, pressure sensitive adhesive on a densified kraft paper liner.

- High adhesion, good solvent resistance, and excellent UV resistance
- Bonds on contact, works on a variety of substrate or material combinations
- Withstands temperatures from 180°F (82°C)



High Temp Applications

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>03331</b> -5	Bulk	½" x 36 yd	Clear	72	RL
0-00-21200- <b>03332</b> -2	Bulk	¾" x 36 yd	Clear	48	RL
*0-00-21200- <b>05865</b> -3	12 Rolls per Inner, 6 Inners per Box	½" x 36 yd	Clear	72	RL
*0-00-21200 <b>-05866</b> -0	12 Rolls per Inner, 4 Inners per Box	¾" x 36 yd	Clear	48	RL
0-00-21200- <b>38442</b> -4	Bulk	1/4" x 60 yd	Clear	72	RL
0-00-21200- <b>15680</b> -9	Bulk	½" x 60 yd	Clear	72	RL

#### Scotch® ATG Adhesive **Transfer Tape 926**

Ideal for applications requiring high bond strength, high shear strength and high temperature performance.

- Excellent temperature and solvent resistance
- Use to attach nameplates on award plaques, bonding foam insulation, difficult to bond folders and boxes




UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>67669</b> -7	Bulk	1/4" x 18 yd	Clear	12	RL
0-00-21200- <b>63102</b> -3	Bulk	½" x 18 yd	Clear	72	RL
0-00-21200- <b>63101</b> -6	Bulk	34" x 18 yd	Clear	12	RL
0-00-21200- <b>62735</b> -4	Bulk	½" x 36 yd	Clear	72	RL
0-00-21200- <b>62736</b> -1	Bulk	¾" x 36 yd	Clear	48	RL



### Scotch® ATG Adhesive Transfer Tape 969 (Hi-Tack Acrylic)

A soft, pressure sensitive adhesive system that features high initial adhesion and good holding power to a variety of materials.





- 5.0 mil • Use on folders and boxes, attach fabric swatches in sample books, and assemble point-of-purchase displays
- Withstands temperatures up to 180°F (82°C)

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>05671</b> -0	Bulk	½" x 18 yd	Clear	72	RL
*0-00-21200 <b>-31493</b> -3	12 Rolls per Inner, 2 Inners per Box	½" x 18 yd	Clear	24	RL
0-00-21200- <b>05672</b> -7	Bulk	¾" x 18 yd	Clear	48	RL
0-00-21200- <b>15682</b> -3	Bulk	½" x 36 yd	Clear	72	RL
0-00-21200- <b>15683</b> -0	Bulk	34" x 36 yd	Clear	48	RL

#### Scotch® ATG Applicator 700

A touch of the finger triggers a quick, controlled application of Scotch® ATG Adhesive Transfer Tape at the same time as the liner rewinds into the applicator. There is no mess and no cleanup.


For 1/2" and 3/4" wide tape.

UPC	Case Qty	Units
0-00-51131- <b>06505</b> -5	6	EA

#### Scotch® ATG 700 Adapter Kit

Use this adapter kit for Scotch® ATG 700 Adhesive Applicator when you need the flexibility of a 1/4 inch wide application.

UPC	Case Qty	Units
0-00-21200- <b>73672</b> -8	6	EA














## **Adhesive Transfer Tapes**

# Neat, Precise Application and High Performance

3M™ Adhesive Transfer Tapes are rolls of pressure sensitive adhesive pre-applied to a special release line. For application, the tape is simply pressed, adhesive side down, to a surface and the liner is peeled off.

#### 3M<sup>™</sup> Adhesive Transfer Tape 950

Offers high strength 300 acrylic adhesive on a 3.5 mil, 60 lb densified kraft liner.

- Excellent for high tack, thin applications
- Attaches similar and dissimilar materials
- Bonds high and low surface energy plastics, textured plastics, foams, fabrics and coated papers
- Good UV and chemical resistance

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>04849</b> -4	Bulk	½" x 60 yd	Clear	72	RL
0-00-21200- <b>04553</b> -0	Bulk	¾" x 60 yd	Clear	48	RL
0-00-21200- <b>04850</b> -0	Bulk	1" x 60 yd	Clear	36	RL
0-00-21200- <b>04851</b> -7	Bulk	2" x 60 yd	Clear	24	RL

5.0 mil

2.0 mil

#### 3M<sup>™</sup> Adhesive Transfer Tape 927

Features high strength 300 acrylic adhesive on a 2.0 mil, 60 lb densified kraft liner.


- Use to attach gaskets and a variety of industrial foam materials
- High bond strength at elevated temperatures
- Bonds high and low surface energy plastics, metal or plastic nameplates
- Good UV and chemical resistance

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>05277</b> -4	Bulk	¾" x 60 yd	Clear	48	RL
0-00-21200 <b>-05278</b> -1	Bulk	1" x 60 yd	Clear	36	RL



#### 3M<sup>™</sup> Adhesive Transfer Tape 465

Features high tack acrylic adhesive 400 with a 3.5 mil, 60 lb densified kraft paper liner.



High tack, excellent adhesion to most paper stocks

• Good low temperature performance and peel strength on many surfaces



	_	_
2	N	mil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>03333</b> -9	Bulk	1/4" x 60 yd	Clear	144	RL
0-00-21200- <b>03335</b> -3	Bulk	½" x 60 yd	Clear	72	RL
0-00-21200- <b>03336</b> -0	Bulk	¾" x 60 yd	Clear	48	RL
0-00-21200- <b>03337</b> -7	Bulk	1" x 60 yd	Clear	36	RL
0-00-21200- <b>03338</b> -4	Bulk	1½" x 60 yd	Clear	24	RL
0-00-21200- <b>04299</b> -7	Bulk	2" x 60 yd	Clear	24	RL

#### 3M<sup>™</sup> Adhesive Transfer Tape 9485PC

Features high performance acrylic adhesive 350 with a 58 lb polycoated kraft paper liner.

- For applications requiring high shear strength
- Ideal for joining materials that have rougher surfaces
- The liner is moisture resistant and helps to minimize wrinkles
- Good low temperature performance and peel strength on many surfaces

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>63476</b> -5	Bulk	½" x 60 yd	Clear	72	RL
0-00-21200- <b>67233</b> -0	Bulk	34" x 60 yd	Clear	48	RL
0-00-21200- <b>63477</b> -2	Bulk	1" x 60 yd	Clear	36	RL
0-00-21200- <b>67413</b> -6	Bulk	2" x 60 yd	Clear	24	RL







5.0 mil

### **Double Coated Tapes**

### **Increased Dimensional Stability** for Easy Handling and Application

#### 3M<sup>™</sup> Double Coated Film Tape 415

A medium-firm, acrylic, pressure sensitive adhesive that features an excellent balance of good initial adhesion ("quick stick") and good shear holding power. It is ideal for bonding together a wide variety and dissimilar materials such as metals, glass, wood, paints, and many plastics. .



4.0 mil

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>03764</b> -1	Bulk	½" x 36 yd	Clear	72	RL
0-00-21200- <b>03322</b> -3	Bulk	¾" x 36 yd	Clear	48	RL
0-00-21200- <b>03323</b> -0	Bulk	1" x 36 yd	Clear	36	RL
0-00-21200- <b>04294</b> -2	Bulk	2" x 36 yd	Clear	24	RL

#### 3M<sup>™</sup> Double Coated Tape 9832

Versatile acrylic adhesive bonds melamine, wood, veneer, HPL, particle board, plywood, foam, and more with strength that increases over time.

- Fast for improved productivity
- User-friendly and neat to save set-up and clean-up
- Durable adhesion for dependable performance

4.8 m
-------

UPC	Packaging	Size	Color	Case Qty	Units
0-00-51115- <b>23782</b> -9	Bulk	1" x 36 yd	Clear	24	RL

#### 3M<sup>™</sup> Double Coated Tape 9579

The medium-firm, synthetic rubber adhesive features very high adhesion to a variety of surfaces, good shear holding power and offers one-piece removal from most substrates.

- High initial adhesion, excellent quick stick
- Good adhesion to low surface energy substrates
- For indoor and room temperature applications

UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>65873</b> -0	Bulk	½" x 36 yd	White	72	RL
0-00-21200- <b>65872</b> -3	Bulk	¾" x 36 yd	White	48	RL
0-00-21200- <b>65871</b> -6	Bulk	1" x 36 yd	White	36	RL
0-00-21200- <b>65870</b> -9	Bulk	1½" x 36 yd	White	24	RL
0-00-21200- <b>65869</b> -3	Bulk	2" x 36 yd	White	24	RL



#### 3M<sup>™</sup> Double Coated Tape 9500PC

A medium-firm, acrylic adhesive that provides excellent shear holding power and initial adhesion.



- Adheres to powder coated surfaces, most plastics and difficult surfaces
- High-holding strength and short-term heat resistance up to 350°F (177°C)



5.6 mil


5.0 mil


UPC	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>67795</b> -3	Bulk	½" x 36 yd	Clear	72	RL
0-00-21200- <b>67794</b> -6	Bulk	¾" x 36 yd	Clear	48	RL
0-00-21200- <b>67796</b> -0	Bulk	1" x 36 yd	Clear	36	RL

#### 3M™ Double Coated Paper Tape 410M

A natural rubber, double coated tape with heavy paper carrier for increased strength and dimensional stability.

- Good initial adhesion to a variety of surfaces
- Use for core starting, end tabbing of papers, films and foils
- For indoor and room temperature applications







9.0 mil





# 3M™ Dual Lock™ **Reclosable Fasteners**

#### Super strength. Ultimate ease.

Durable enough to last through repeated opening and closing. Unique mushroom shaped heads snap shut and stay locked.

- Durable up to 1,000 openings and closings before losing 50% of original tensile strength
- Helps reduce vibration
- Temperature, moisture and UV resistant
- Pressure-sensitive adhesive easily forms a powerful bond
- Interlocking mushroom-shaped heads have 5x the tensile strength of hook-and-loop products


#### **General Industrial Applications**

- Hold access panels to manufacturing equipment, control panels, HVAC units, electrical enclosures, electronic equipment, and elevators
- Attach moveable sensors, acoustic control panels to sound containment enclosure
- Attach interior signage and placards with easy removability
- · Hold remote controls on equipment for storage when not in use
- Hang tools on maintenance carts for ready access and secure transport
- · Attach plastic and screen enclosure panels around automated equipment in temporary manufacturing cells
- Fasten rigid or flexible solar panels





At-a-glance Reference






Convenient Packaging



Mini-Pack (MP) carton simplifies storage and dispensing. Holds two rolls.





Stem Density				Temperature		
(per sq.in.)	Product ID	Adhesive	Color	Resistance	Area	Substrates
250	3540	Rubber	Black	120°F (49°C)	Indoor	Metals (Al & SS), plastics (acrylic, PC, ABS), powder coated paints, low surface energy (PP, PE)
400	3541	Rubber	Black	120°F (49°C)	Indoor	Metals (Al & SS), plastics (acrylic, PC, ABS), powder coated paints, low surface energy (PP, PE)
170	3542	Rubber	Black	120°F (49°C)	Indoor	Metals (Al & SS), plastics (acrylic, PC, ABS), powder coated paints, low surface energy (PP, PE)
250	3550	White Acrylic	Black	200°F (93°C)	Indoor/Outdoor	Metals (Al & SS), glass, plastics (acrylic, PC, ABS)
400	3551	14/1 ' A !'	DI I	00005 (0000)		M - 1 (410.00) - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
170	3552	White Acrylic	Black	200°F (93°C)	Indoor/Outdoor	Metals (Al & SS), glass, plastics (acrylic, PC, ABS)
250	3560	Clear Acrylic	Clear	220°F (104°C)	Indoor/Outdoor	Metals (Al & SS), glass, plastics (acrylic, PC, ABS)
Low Profile	4570	Low Surface Energy Acrylic	Clear	158°F (70°C)	Indoor/Outdoor	Metals (Al & SS), glass, plastics (acrylic, PC, ABS), powder coated paints, low surface energy (PP, PE)





#### 3M<sup>™</sup> Dual Lock<sup>™</sup> Reclosable Fastener SJ3540, TB3540



This product is for use with many plastics (acrylic, polycarbonate and ABS), powder coated paints and low surface energy materials (polypropylene and polyethylene).

- Rubber based adhesive offers high initial adhesion upon contact
- Temperature resistance of up to 120°F (49°C), for indoor use only
- 250 stems per square inch with a 0.23 inch engaged thickness





	UPC	Product ID	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>65812</b> -9	SJ3540	Bulk	1" x 50 yd	Black	2	RL
7	<b>*</b> 0-00-51111- <b>97627</b> -2	TB3540	Bag	1" x 10'	Black	8	BG

#### 3M™ Dual Lock™ Reclosable Fastener MP3541/MP3542



It has a rubber based pressure sensitive adhesive that performs well in indoor applications up to 120°F (49°C).







UPC	Product ID	Packaging	Size	Color	Case Qty	Units
*0-00-51131- <b>06483</b> -6	MP3541/ MP3542	Mini Pack	1" x 4.9 yd	Black	5	PH

#### 3M<sup>™</sup> Dual Lock<sup>™</sup> Reclosable Fastener SJ3550



Uses an acrylic adhesive that bonds well to a variety of medium-high surface energy materials, including some plastics, metal, glass, and painted surfaces.

- The adhesive sticks quickly and reaches full strength after 72 hours
- Can use at temperatures ranging from -20°F to 200°F (-29°C to 93°C)



UPC	Product ID	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>74379</b> -5	SJ3550	Bulk	1" x 50 yd	Black	2	RL

#### \*Except as otherwise indicated (\*). for industrial/occupational use only. Not for consumer sale or use.





Type 400 and 170 stem density polyolefin fastener.

- General purpose acrylic adhesive works well for indoor and outdoor
- High temperature resistance of up to 200°F (93°C)
- Bonds metals, glass and medium to high surface energy plastics and paint



UPC	Product ID	Packaging	Size	Color	Case Qty	Units
*0-00-51131- <b>06484</b> -3	MP3551/ MP3552	Mini Pack	1" x 4.9 yd	Black	5	PH

#### 3M™ Dual Lock™ Reclosable Fastener SJ3560, MP3560, TB3560



Has a clear acrylic adhesive on the back of a clear polypropylene reclosable fastener.

- Superb heat resistance up to 220°F (104°C) for demanding work conditions
- Can be used indoors and outside
- Bonds to metals, glass and high surface energy plastics







UPC	Product ID	Packaging	Size	Color	Case Qty	Units
0-00-21200- <b>86282</b> -3	SJ3560	Bulk	1" x 50 yd	Clear	2	RL
*0-00-51131- <b>06463</b> -8	MP3560	Mini Pack	1" x 4.9 yd	Clear	5	PH
<b>*</b> 0-00-51111- <b>97631</b> -9	TB3560	Bag	1" x 10'	Clear	8	BG

#### 3M™ Dual Lock™ Reclosable Fastener SJ4570, TB4570



A clear, low profile fastener with an engaged thickness of 0.10 inches.

- Half the thickness of standard 3M Dual Lock Reclosable Fasteners
- Low to medium temperature performance, up to 158°F (70°C)
- Bonds to metals, glass, many plastics and powder coated paints and medium to low surface energy materials





	UPC	Product ID	Packaging	Size	Color	Case Qty	Units
	0-00-21200- <b>44883</b> -6	SJ4570	Bulk	1" x 50 yd	Clear	2	RL
*	0-00-51111- <b>97635</b> -7	TB4570	Bag	1" x 10'	Clear	8	CS





## 3M<sup>™</sup> Hook and Loop

# Hooks on One Side, Loops on the Other for Secure, Repeated Closures

As simple as pressing together and pulling apart. Tiny, stiff hooks mesh with pliable loops for quick secure fastening.

- Reliable PSA holds on contact with a variety of materials
- Up to 5,000 closures for standard Hook and Loop



#### 3M<sup>™</sup> Hook and Loop Fastener MP3526/MP3527

Consists of flexible J-shaped nylon hooks and woven loops which engage each other to form a quick attachment. Offers an alternative to zippers, screws, snaps and hooks, bolts and more. Rubber adhesive allows for attachment to low surface energy substrates. Use for:



Top Choice

- Securing fabric to furniture cushions
- Carpet panel attachments
- Graphic attachment
- Panel attachment

**Mini Packs** are great for design development and small volume product requirements.

	UPC	Packaging	Size	Color	Case Qty	Units
4	* 0-00-51131- <b>06488</b> -1	Mini Pack	1" x 4.9 yd	White	5	PH
,	° 0-00-51131- <b>06481</b> -2	Mini Pack	1" x 4.9 yd	Black	5	PH

#### 3M<sup>™</sup> Hook and Loop Fastener TB3526N/TB3527N

Features a high performance, rubber-based pressure sensitive adhesive that is ideal for indoor use and bonds well to paper and cardboard, paint, bare and painted metal, glass, sealed wood, and many plastics, making these fasteners easily and conveniently attach to a variety of substrates.





**Trial Bags** provide a simplified selection proven successful for most common applications, along with just the right length and quantity for trial run testing.

UPC	Packaging	Size	Color	Case Qty	Units
*0-00-51111- <b>97648</b> -7	Trial Bag	1" x 10'	Black	8	BG

#### 3M<sup>™</sup> Hook and Loop Fastener SJ3526N/SJ3527N

Our high performance PSA nylon hook and loop fasteners are coated on the backside with a high performance rubber based pressure sensitive adhesive. The adhesive is ideal for indoor use and bonds well to paper and cardboard, paint, bare and painted metal, glass, sealed wood, and many plastics, making these fasteners easily and conveniently attached to a variety of substrates.






- High performance rubber based adhesive sticks instantly to a variety of indoor substrates
- Woven nylon is durable for thousands of closures
- Fast, convenient means to create refastenable seams, joints and other closures

UPC	Product ID	Size	Extra Desc.	Color	Case Qty	Units
0-00-21200- <b>86243</b> -4	SJ3526N	1" x 50 yd	Hook	Black	3	RL
0-00-21200- <b>86252</b> -6	SJ3527N	1" x 50 yd	Loop	Black	3	RL
0-00-21200- <b>86244</b> -1	SJ3526N	1" x 50 yd	Hook	White	3	RL
0-00-21200- <b>86253</b> -3	SJ3527N	1" x 50 yd	Loop	White	3	RL

Hook and loop rolls are ordered separately.









# 3M<sup>™</sup> Hook and Loop Reclosable Fastener SJ3571/SJ3572

Premium performance PSA nylon loop with acrylic tape and clear polyethylene film liner. 100 mil to 160 mil engaged thickness, 3.5 mil printed liner.

 Hook and Loop fastener backed with a high performance acrylic adhesive designed for applications requiring high temperature resistance

High Temp indoor/Outdoo

Indoor

- Coated with a premium acrylic adhesive with temperature resistance up to 200°F (93°C)
- Woven nylon is durable for thousands of closures

UPC	Product ID	Size	Extra Desc.	Color	Case Qty	Units
0-00-21200- <b>86285</b> -4	SJ3571	1" x 50 yd	Loop	Black	3	RL
0-00-21200- <b>86286</b> -1	SJ3572	1" x 50 yd	Hook	Black	3	RL
0-00-21200- <b>87277</b> -8	SJ3571	1" x 50 yd	Loop	White	3	RL
0-00-21200- <b>87292</b> -1	SJ3572	1" x 50 yd	Hook	White	3	RL
0-00-21200- <b>87297</b> -6	SJ3571	2" x 50 yd	Loop	Black	2	RL
0-00-21200- <b>86377</b> -6	SJ3572	2" x 50 yd	Hook	Black	2	RL

Hook and loop rolls are ordered separately.

#### 3M<sup>™</sup> High Tack Hook and Loop Fastener SJ30H/SJ30L

Nylon hook and loop tapes with a white polyethylene film liner and an engaged thickness between 100 mil to 160 mil.

- Coated with a rubber adhesive with temperature resistance up to 100°F (38°C) for indoor use
- Aggressive adhesive on the back of the fastener bonds well to harder to stick surfaces such as ABS and many plastics
- Woven nylon is durable for thousands of closures
- Full bond strength achieved in 24 hours

UPC	Product ID	Size	Extra Desc.	Color	Case Qty	Units
0-00-51115- <b>80817</b> -3	SJ30H	1" x 25 yd	Hook	Black	3	RL
0-00-51115- <b>80823</b> -4	SJ30L	1" x 25 yd	Loop	Black	3	RL
0-00-51115- <b>81023</b> -7	SJ30H	1" x 25 yd	Hook	White	3	RL
0-00-51115- <b>80834</b> -0	SJ30L	1" x 25 yd	Loop	White	3	RL

Hook and loop rolls are ordered separately.




Nylon hook and loop tapes with a clear polyethylene film liner and an engaged thickness between 100 mil to 160 mil.



- Coated with an acrylic adhesive with temperature resistance up to 180°F (82°C), both indoors and outdoors
- The adhesive on the back of the fastener bonds well to paint, bare and painted metal, glass, sealed wood and many plastics
- Woven nylon is durable for thousands of closures
- Full bond strength achieved in 72 hours

UPC	Product ID	Size	Extra Desc.	Color	Case Qty	Units
0-00-51115- <b>71752-</b> 9	SJ60H	1" x 25 yd	Hook	Black	3	RL
0-0-051115- <b>71758</b> -1	SJ60L	1" x 25 yd	Loop	Black	3	RL
0-00-51115- <b>71775</b> -8	SJ60H	1" x 25 yd	Hook	White	3	RL
0-00-51115- <b>71781</b> -9	SJ60L	1" x 25 yd	Loop	White	3	RL

Hook and loop rolls are ordered separately.

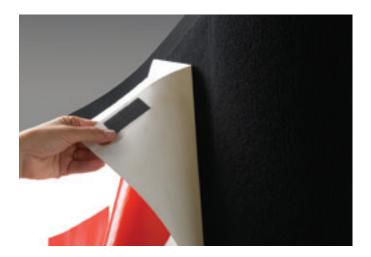





### **Numerical Index**

Product Page	Product	Page	Product	Page
5A+38	740 UV	30	3779	45
5S Safety Pack67	764	67	3779 IW	45
5-Way Penetrant	766	-	3792AE	
2021	766DC		3792Q	
2421	767		3900	62
2721	767DC		3903	63
30NF26	821		3939	
7220	822		4000 UV	31
7420	822P		4008	
74 CA20	824	-	4016	
75 CA20	824RCT	-	4026	
7719	827		4026W	
77 CA19	829		4411G	
7820	830RCT	-	4411N	
8020	847	-	4412G	
9019	890MSR	_	4412N	
90 CA19	898	-	4496	
94 ET20	898 IW		4496B	
101+	924		4799	
150+33	926		4811	
201+57	927		4910	
21859	950		5200	
301+58	969		5200FC	
310M31	971		5423	
311+	1000NS		5490	
35143	1003SL	-	5498	
351 IW	1074		5700	
35343 353 IW43	1075 PK50		5702 5702 IW	
355	1099		5903	
355 IW43	1300	-	5903	
36170	1357	-	5952	
369	1520CW	-	6969	
369 PK6	1521CW		8087CW	
37141	1525CW		8310	
371 PK641	1580-P	·	8315	
37342	1581A		8320	
373 IW42	1599B		8330	
37542	1900		8651	
375 IW42	2000+		8651 PK6	
401+58	2380	-	8884	49
410M74	2460		8898	
41574	2519	60	8898 PK9	48
425 39, 64	2929	63	8899HP	48
465	3000 UV	31	8919MSR	48
47166	3000WT	34	8919MSR IW	48
471 IW	3071	44	8934	47
48370	3073	44	8934 IW	47
483 IW70	3073 IW	44	8934 PK9	47
500	3199	45	8934 PK12	47
501+59	3199 PK6	45	8959	47
52530	3565		8959 IW	47
54030	3750P	53	8979	62
600	3750P PK40		9415PC	71
600	3762AE		9425	71
605	3762Q		9485PC	
61050	3765		9500PC	
610 IW50	3771	45	9579	74
615+38	3771 IW	45	9832	74
660	3772		3M Firestop	
690 51	3775	45	Identification Label	34
690 IW 51	3775 IW	45	3M <sup>™</sup> Pneumatic App	olicator 34A 31







#### **Numerical Index**

Product	Page	Product	Page	Product	Page
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup>	27	FB269	36	PLE-T1 PL	53
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup>	Plus II 27	FB269SL	36	PLE-T2	53
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup>		FB369		PLE-T3	
Plus II Applicator	27	FB369SL		PLE-T4	
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup>		FIP 1-STEP		PLG2	
Mixing Nozzles	27	Fire Barrier Mortar		PLG4	
3M™ EPX™ 200, 400 mL		Fire and Water Barr		PM4	
Manual Applicator	27	Fire Barrier Mortar		PR100	
3M™ EPX™ 490 mL		FireDam 200		PSD1	
Manual Applicator	27	GT1		PSD2	
3M™ Scotch-Weld™		GT2		Quadrack Converter	
EPX™ Plus II 2:1 Plunger	27	GT3		RP45	
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup>		H10		SF100	
1:1/2:1 Plunger (shared)		H12	-	Silicone Lubricant	
3M <sup>™</sup> EPX <sup>™</sup> Pneumatic		H121		Silicone Spray	
Applicator 50 mL	27	H122		SJ30H	
Ultra Fast	21	H128	-	SJ30H	
Anchors UFA-16	25	H150	-	SJ3526N	
Adhesive Remover			-	SJ3526N SJ3527N	
		H180	-	****	
Adhesive Remover 6040		H183		SJ3540	
Adhesive Remover 6041		H38		SJ3550	
Adhesive Remover Low V		HMS-G4C2		SJ3560	
AE II		HPS-4C2		SJ3571	
ATG700		HR 80		SJ3572	
B258		HR 83	-	SJ4570	
CA40H		IC 15WB+		SJ60H	
Case Sealing Adhesive		M-1		SJ60L	
Citrus Base Cleaner		M707		Smoke and Sound Ta	pe 37
Concrete Repair Mixing T	ip26	M727	-	Sticker & Marker	
CP 25WB+		M797		Remover 6042	
CS 195+		M920		TB3526N/TB3527N	
DP100	28	M96		TB3540	
DP100FR		Marine Silicone	31	TB3560	76
DP100NS		Mounting Brackets	35	TB4570	76
DP100Plus	28	MP+	37	TL22	24
DP125	28	MP+STIX	37	TL42	24
DP420NS	28	MPP+	37	TL43	24
DP460	28	MP3526N/MP3527	7N77	TL62	24
DP460NS	28	MP3541/MP3542.	76	TL71	
DP600	29	MP3551/MP3552.	76	TL72	25
DP600NS	29	MP3560	76	TL77	25
DP604NS	29	P56W	51	TL90	25
DP8010	29	Palletizing Adhesive	e 21	UPPD1-1/2	35
DP8010NS	29	Pass-Through Device	e35	UPPD2	35
DP8407NS	29	PK39	36	UPPD3	35
DP8410NS	29	PLE-F1	53	UPPD4	35
DP8805NS	29	PLE-FED1	53		
DP8810NS	29	PLE-NP1	53		
DT100	35	PLE-NP2	53		
DT11	61	PLE-NP3	53		
DT17	61	PLE-NP4	53		
DT200	35	PLE-NP5	53		
DT400	35	PLE-NP6			
DT8		PLE-NP9			
E 5A-4		PLE-NPZXL			
FB249		PLE-T1			
FB249SL		PLE-T1 INV			

Page







### **Product name index**

Product	Page
3M <sup>™</sup> Adhesive and Marine Sealants and Applicators	•
525	30
540	
740 UV	
5200	
5200FC	
4000 UV	
3000 UV	
Marine Silicone	
310M Manual Applicator.	
3M™ Pneumatic	31
Applicator 34A	31
3M <sup>™</sup> Adhesive Transfer Ta	
950	-
927	73
465	73
9485PC	73
3M <sup>™</sup> Aerosol Adhesives	
77	19
77 CA	
90	
90 CA	
72	
74	
74 CA	
75 CA	
78	
80	
94ET	
20	21
24	21
27	21
Case Sealing Adhesive	21
Palletizing Adhesive	21
3M <sup>™</sup> Carry Handles	
8310	56
8315	56
8320	56
8330	56
3M <sup>™</sup> Cleaners and Lubrica	
Adhesive Remover	
Adhesive Remover 6040.	
Adhesive Remover 6041 .	22
Adhesive Remover Low VOC	22
Sticker & Marker	22
Remover 6042	
Citrus Base Cleaner	
5-Way Penetrant	
Silicone Spray 3M™ Concrete Repair Prod	
600	
Concrete Repair Mixing T	

Product	Page
3M <sup>™</sup> Double Coated	
Foam Tapes 4026	60
4026W	
4496	
4496B	
4008	
4016	
3M™ Double Coated Tapes 415	74
9579	
9500PC	
9832	
410M	
3M™ Dual Lock™	
Reclosable Fasteners	
SJ3540	76
TB3540	76
MP3541/MP3542	76
SJ3550	
MP3551/MP3552	76
SJ3560	76
MP3560	76
TB3560	76
SJ4570	76
TB4570	76
3M <sup>™</sup> Duct and Cloth Tapes	
DT8	61
DT11	61
DT17	61
8979	62
5903	62
3900	62
3939	62
6969	
3903	63
2929	63
1900	
GT1	63
GT2	
GT3	
3M <sup>™</sup> Extreme Sealing Tapes	
4411G	
4411N	
4412G	
4412N	69
3M <sup>™</sup> Fire Barrier Solutions	
IC 15WB+	
CP 25WB+	
FIP1 STEP	
HMS-G4C2	
HPS-4C2	
Nozzles	
150+	
2000+	
3000WT	34
1003SI	34

Product	Page
1000NS	34
Firestop Identification Label	34
UPPD1-1/2	35
UPPD2	35
UPPD3	35
UPPD4	35
DT100	35
DT200	35
DT400	35
Ultra Fast Anchors UFA-16	35
Fire Barrier Foam Plug	35
Mounting Brackets	35
Pass-Through Device	35
Mounting Brackets	35
PM4	36
FB249SL	36
FB269SL	36
FB369SL	36
FB249	36
FB269	36
FB369	36
B258	36
PK39	36
PLG2	36
PLG4	36
CS-195+	36
MP+STIX	37
MP+	37
MPP+	37
Fire Barrier Mortar	37
FireDam Spray <sup>™</sup> 200	39
Fire and Water Barrier Tape	
Fire Smoke and Sound Tape	37
615+	38
5A+	38
E 5A-4	39
3M™ Flatback Tape	
2519	60
3M™ Glass Cloth Tape	
361	70
3M <sup>™</sup> Hang Tabs	
1074	
1075 PK50	
1076 PK50	56







#### **Product name index**

Product name inde	ex
Product I	Page
3M <sup>™</sup> Hook and Loop	
Reclosable Fasteners	
MP3526N/MP3527N	77
TB3526N/TB3527N	77
SJ3526N	77
SJ3527N	77
SJ3571	78
SJ3572	78
SJ30H	78
SJ30L	78
SJ60H	78
SJ60L	78
3M <sup>™</sup> Hot Melt Adhesives	
and Applicators	
3762AE	23
3762Q	23
AE II	23
3792AE	23
3792Q	23
Quadrack Converter	23
Impact Stripping Tape 500	70
3M <sup>™</sup> Label Protection Tapes	
821	55
3565	55
3765	55
3M <sup>™</sup> Masking Tapes	
101+	57
201+	57
301+	58
401+	58
501+	59
2380	60
3M <sup>™</sup> Metal Foil and	
Venture <sup>™</sup> HVAC Tapes	
425	64
1520CW	
1521CW	
1525CW	
1580-P	
1581A	
1599B	05
PLE-T1	53
PLE-T1 PL	
PLE-T1 INV	
PLE-T2	
PLE-T3	
PLE-T4	
PLE-F1	
PLE-NP1	
PLE-NP2	53
PLE-NP3	53
PLE-NP4	53
PLE-NP5	53
PLE-NP6	53
PLE-NP9	
PLE-FED1	53
PLE-NPZXL	53

Product	Page
3M™ Polyethylene Tape	
483	70
483 IW	70
3M <sup>™</sup> Pouch Tapes	
824	54
827	
829	
824RCT	
830RCT	
3M <sup>™</sup> Preservation Tape	54
•	70
4811	70
3M <sup>™</sup> PTFE Tape	74
5490	
3M <sup>™</sup> Removable	/ 1
Repositionable Tape	
9415PC	71
9425	
3M <sup>™</sup> Seaming Taps	
8087CW	6E
	05
3M <sup>™</sup> Tape Sheets and Pads	F0
822	
822P	
3750P	
3750P PK40	53
3M™UHMW Tape	
5423	71
3M <sup>™</sup> VHB <sup>™</sup> Tapes	
RP45	68
4910	69
5952	69
3M <sup>™</sup> Floor and Safety Tapes a	and
Lane Marking Applicator	
471	
471 IW	
5S Safety Pack	67
764	67
766	67
766DC	67
971	66
5702	67
5702 IW	67
5700	67
767	67
767DC	67
M-1	67
3M™ Scotch-Weld™	
Anaerobic Adhesives	
TL22	24
TL42	
TL43	24
TL62	24
TL71	
TL72	
TL77	
: :	

Product	Page
3M <sup>™</sup> Solvent and Water Based Adhesives	
1099	26 26
1357 30NF	26
3M™ Scotch-Weld™ Instant Adhesives	
PR100	25
SF100	25
Structural Adhesives           DP100Plus           DP125           DP420NS           DP460           DP460NS           DP100           DP100FR           DP100NS           DP8805NS           DP8810NS           DP8010           DP8410NS           DP840NS           DP840NS           DP8604NS           DP600NS	2828282828292929292929
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup>	
Applicators, Plungers and No. 3M™ Scotch-Weld™ EPX™	
Plus II Applicator	
3M™ EPX™ 490mL Manual Applicator 3M™ EPX™ Pneumatic	27
Applicator 50 mL	
Plus II 1:1 Plunger	
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup> Plus 1:1/2:1 Plunger (shared)	
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup> 10:1 Plunger	27
3M <sup>™</sup> Scotch-Weld <sup>™</sup> EPX <sup>™</sup> Mixing Nozzles	27







### **Product name index**

Product	Page
Scotch® ATG Adhesive Transfer Tapes and Accesso	ories
924	
926	72
969	
ATG700	72
Scotch® Box Sealing Tapes and Combo Packs	
371	41
371 PK6	41
311+	41
375	42
375 IW	42
373	42
373 IW	42
355	43
355 IW	
353 IW	
353	
351	
351 IW	
369	
369 PK6	
PSD1	
Scotch® Fine Line Masking	
2460	•

218......59

Product	Page
Scotch® High Streng Filament and Strapp	
8934	
8934 PK12	
8934 PK9	47
8934 IW	47
8959	47
8959 IW	47
8898	48
8898 PK9	48
8899HP	48
8651	48
8651 PK6	48
898	48
898 IW	48
8919MSR	48
8919MSR IW	48
890MSR	48
Scotch® Light Duty I	Packaging Tapes
600	50
605	50
610 IW	50
610	50
660	50
690	51
690 IW	51
5910	51
Scotch® Recycled C Box Sealing Tapes	orrugate
3073	44
3073 IW	11

Product	Page
Scotch® Security Tapes	
3199	45
3199 PK6	45
3771	45
3771 IW	45
3772	45
3775 IW	45
3775	45
3779	45
3779 IW	45
Scotch® Stretchable	
Tape and Dispenser	
8884	49
H38	49
Scotch® Tape Dispensers	
HR80	46
HR83	46
H122	46
H128	46
H150	46
H180	46
H183	46
H10	49
H12	49
H121	49
Н38	49
P56W	51
M96	51
M920	51
M727	54
M797	54
M707	55







Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Disclaimer:** 3M industrial and occupational products are intended, labeled, and packaged for sale to trained industrial and occupational customers for workplace use. Unless specifically stated otherwise on the applicable product packaging or literature, these products are not intended, labeled, or packaged for sale to or use by consumers (e.g., for home, personal, primary or secondary school, recreational/sporting, or other uses not described in the applicable product packaging or literature), and must be selected and used in compliance with application health and safety standards (e.g., U.S. OSHA), as well as all product literature, user instructions, warnings, and limitations. Misuse of 3M industrial and occupational products may result in injury, sickness, or death. For help with product selection and use, consult you on-site safety professionally, industrial hygienist, or other subject matter expert. For additional product information, visit www.3M.com.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

3M, Dual Lock, EPX, Fastbond, Scotch-Weld, Tartan, Interam, FireDam, Shipping-Mate, Super 77, Venture Tape, VHB and Weatherban are trademarks of 3M Company. Scotch is a registered trademark of 3M Company. Cosmoline is a trademark of E. F. Houghton & Co.

LEED® is a registered trademark of the United States Green Building Council (USGBC). Meets California Air Resources Board (CARB), Ozone Transport Commission (OTC) and Lake Michigan Air District Consortium (LADCO) VOC requirements, is GREENGUARD Children & Schools CertifiedSM, and helps contribute to Leed® credits.

The FBC® System Compatible logo indicates that a 3M product has been tested and is monitored on an on going basis to assure chemical compatibility with FlowGuard Gold®, BlazeMaster®, and Corzan® pipe and fittings. FBC is a registered trademark and FlowGuard Gold, Blazemaster and Corzan are trademarks of Lubrizol Advanced Materials, Inc. © Lubrizol Advanced Materials, Inc. 2013. All rights reserved. HandyMax and PowerMax are registered trademarks of Soraton SA.



**3M Industrial Adhesives and Tapes Division** 

3M Center, Building 225-3S-06 St. Paul, MN 55144-100 800-362-3550 877-369-2923 (Fax) www.3M.com/Industrial





